INCH-POUNDS

MIL-DTL-28754/6D
w/AMENDMENT 1
14 May 2020
SUPERSEDING
MIL-DTL-28754/6D
21 November 2014

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV,
40 PIN, STRAIGHT THROUGH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28754.

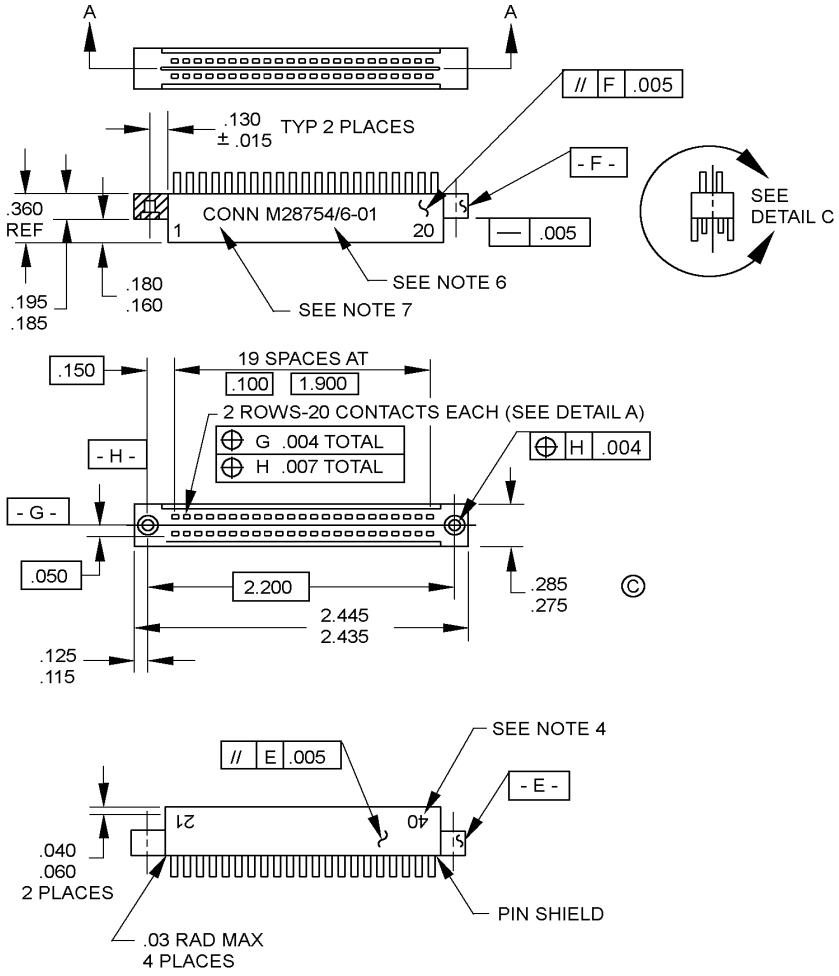


FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.


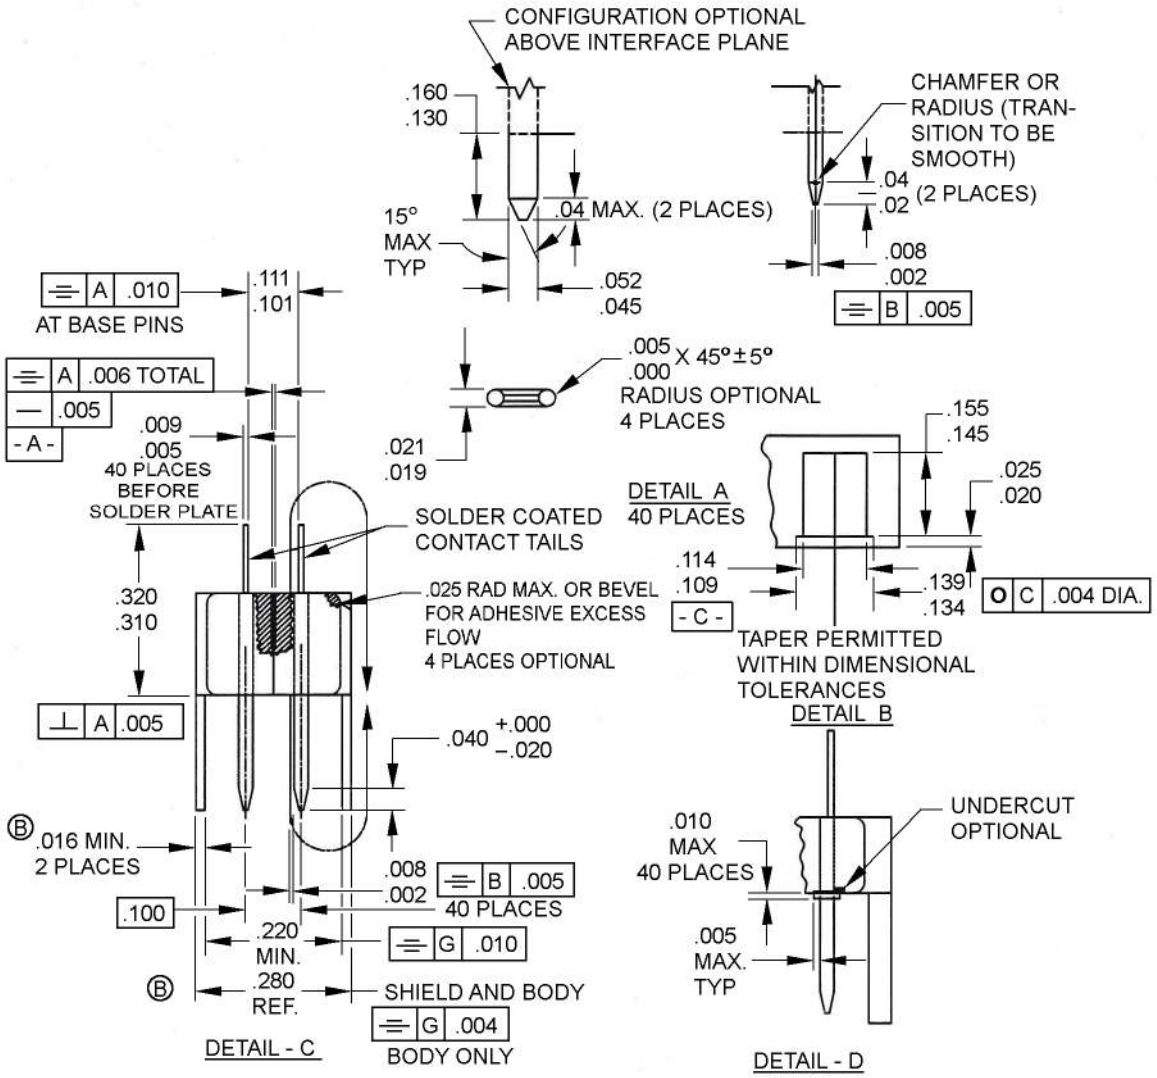


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

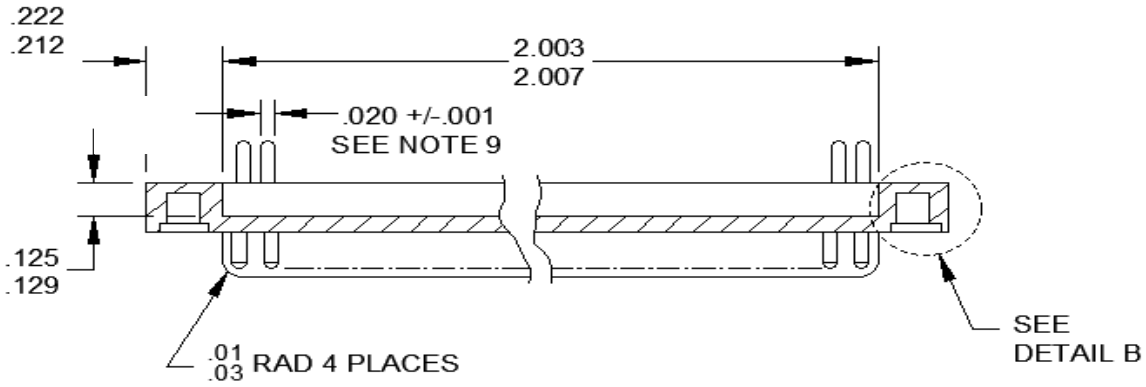

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	.05	.040	1.02	.125	3.18	.220	5.59
.004	.10	.045	1.14	.126	3.20	.222	5.64
.005	.13	.047	1.19	.129	3.28	.270	6.86
.006	.15	.0495	1.257	.130	3.30	.280	7.11
.007	.18	.050	1.27	.134	3.40	.310	7.87
.008	.20	.052	1.32	.139	3.53	.320	8.13
.009	.23	.060	1.52	.145	3.68	.360	9.14
.010	.25	.096	2.44	.150	3.81	1.900	48.26
.015	.38	.100	2.54	.155	3.94	2.003	50.88
.019	.48	.101	2.57	.160	4.06	2.007	50.98
.020	.51	.109	2.77	.180	4.57	2.200	55.88
.021	.53	.111	2.82	.185	4.70	2.435	61.85
.025	.64	.114	2.90	.195	4.95	2.445	62.10
.03	.8	.115	2.92	.212	5.38		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerance is ± .005 on 3 place decimals and ±.01 on two place decimals and ±2° on angles.
4. Contact numbers 1, 20, 21 and 40 shall be marked on pin shield in color contrasting characters, .06 inch high.
5. Flash around blade contacts not to exceed .010 from the body and shall be firmly attached.
6. Mark in this area in color contrasting characters, .06 inch high.
7. The letters CONN are to be marked in color contrasting characters, .06 inch high and are to proceed the military Part or Identifying Number (PIN) but are not to be included in the PIN.
8. The line referred to as -G- designates a plane passing through the axis of the two .114 +.000 -.005 diameter keying pin holes.
9. Dimensions applies prior to solder coating.

FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Contacts: See figure 1.

Plating: Contact plating shall be in accordance with MIL-DTL-28754. Solder coated contact tail shall be tinned (see detail C) with solder to a thickness of 0.0005 inch to 0.003 inch and solder shall cover tails. Solder used shall be in accordance with J-STD-006, type Sn60, form B, no-fluxed. A noncorrosive flux may be used in accordance with J-STD-004, flux designator R0M0 or R0M1.

Pin shields:

Dash numbers 01 and 02: Aluminum alloy, 3/4 hard in accordance with SAE-AMS-QQ-A-250. Anodized black in accordance with MIL-A-8625, type II, class 2.

Dash numbers 03 and 04 (insulated): Aluminum alloy, 3/4 hard in accordance with SAE-AMS-QQ-A-250. Anodized black in accordance with MIL-A-8625, type III, class 2.

Alternate material: Unclad E-glass, woven reinforcement material and flame resistant epoxy resin system in accordance with ASTM D1867.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Solderability: In accordance with MIL-DTL-28754.

Current rating: 3 amperes.

Temperature rating: -55° to + 105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Marking: In accordance with MIL-DTL-28754 and figure 1.

PIN: M28754/6- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash no.	Y
01 1/	.058 (1.47) .062 (1.57)
02 1/	.031 (.79) .035 (.89)
03	.058 (1.47) .062 (1.57)
04	.031 (.79) .035 (.89)

1/ Inactive for new design. Use -03 and -04.

First article testing: Perform the applicable tests as specified in MIL-DTL-28754 and the appendix thereto.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-28754, this document references the following:

MIL-A-8625
J-STD-004
J-STD-006
ASTM D1867
SAE-AMS-QQ-A-250

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2020-061)

Review activities:
Army – AR, MI
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:31Z
Check the source to verify that this is the current version before use.