MIL-F-52525/1A
30 June 1987
SUPERSEDING
MIL-F-52525/1
11 October 1978

MILITARY SPECIFICATION SHEET

FITTINGS, WIRE REINFORCED HYDRAULIC HOSE AND CLAMP-HALVES FIELD ATTACHABLE (REUSABLE), SCREW-ON TO 37° FLARE FEMALE SWIVEL, STRAIGHT, Type 100R2 FOR USE WITH TYPE 100R2 DOUBLE WIRE BRAID HOSE

The requirements for acquiring the fittings described herein shall consist of this specification and the latest issue of MIL-F-52525.

REQUIREMENTS:

1. The fittings shall conform to figure 1 and table I.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions for 100R2 fitting. 1/

Specification part number	Hose dash number	Nominal hose I.D. (inch)	Tube dash number	Nominal tube O.D. (inch)	Nominal thread size	H	L		M		N		P		Q		C	
						Nominal hex size	Maximum		Minimum		inch +0.030 -0.015	mm +0.8 -0.4	inch ±0.005	mm ±0.13	Minimum		Maximum	
						inch	inch	mm	inch	mm					inch	mm	inch	mm
M52525/1-4-4	4	1/4	4	1/4	7/16-20	9/16	0.89	22.61	0.300	7.6	0.344	8.7	0.295	7.49	0.11	2.79	2.88	73.15
M52525/1-4-5	4	1/4	5	5/16	1/2-20	5/8	1.00	25.40	0.331	8.4	0.375	9.5	0.355	9.02	0.11	2.79	2.94	74.66
M52525/1-6-6	6	3/8	6	3/8	9/16-18	11/16	1.19	30.23	0.333	8.5	0.375	9.5	0.435	11.05	0.26	6.60	3.16	80.26
M52525/1-8-8	8	1/2	8	1/2	3/4-16	7/8	1.24	31.50	0.375	9.5	0.422	10.7	0.570	14.48	0.375	9.65	3.33	84.58
M52525/1-8-10	8	1/2	10	5/8	7/8-14	1	1.24	31.50	0.461	11.7	0.500	12.7	0.680	17.27	0.375	9.65	3.38	85.85
M52525/1-12-12	12	3/4	12	3/4	1-1/16-12	1-1/4	1.75	44.45	0.469	11.9	0.562	14.3	0.850	21.59	0.57	14.48	4.08	103.63
M52525/1-16-16	16	1	16	1	1-5/16-12	1-1/2	2.05	52.07	0.563	14.3	0.594	15.1	1.100	27.94	0.76	19.81	4.54	115.32
M52525/1-20-20	20	1-1/4	20	1-1/4	1-5/8-12	2	2.63	66.80	0.563	14.3	0.625	15.9	1.410	35.81	1.01	25.65	5.47	138.94
M52525/1-24-24	24	1-1/2	24	1-1/2	1-7/8-12	2-1/4	2.94	74.68	0.661	16.8	0.734	18.6	1.625	41.28	1.25	31.75	5.85	148.59
M52525/1-32-32	32	2	32	2	2-1/2-12	2-7/8	3.50	88.90	0.844	21.4	0.938	23.8	2.240	56.90	1.72	43.69	6.53	165.86

1/ All dimensions not shown shall conform to SAE J516.

X-4112A

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T21:22Z
Check the source to verify that this is the current version before use.

2. The maximum operating pressure shall be as specified in table II.

TABLE II. Maximum operating pressure of fittings.

Hose I.D. (REF) (inch)	PSI (pounds per square inch)	MPa (megapascals)
1/4	5000	34.5
5/16	4250	29.3
3/8	4000	27.6
1/2	3500	24.1
5/8	2750	19.0
3/4	2250	15.5
1	2000	13.8
1-1/4	1625	11.2
1-1/2	1250	8.6
2	1125	7.8

3. The over-tightening torque for swivel nuts shall be as specified in table III.

TABLE III. Over-tightening torque for swivel nut.

Nominal tube O.D. (REF) (inch)	Torque	
	inch pounds	Newton meter (Nm)
1/4	135	15.3
5/16	180	20.3
3/8	270	30.5
1/2	450	50.8
5/8	650	73.4
3/4	900	101.7
1	1200	135.6
1-1/4	1900	214.7
1-1/2	2700	305.1
2	4000	451.9

4. Marking shall include the manufacturer's name or trademark, size, and hose identifier R-2. Location of marking is optional.

5. Method of fabrication and assembly of swivel nut is optional.


6. This item must be listed on QPL-52525.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:22Z
Check the source to verify that this is the current version before use.

INTENDED USE: Type 100R2 fittings are for use with double wire braid reinforced hose conforming to MIL-H-52471, type 100R2.

CATALOGING DATA: The military specification part number is a definitive part number which corresponds to the size fitting covered by this specification sheet. The military specification number, the military specification sheet number, code number for size of hose, and code number for size of tube are combined to form the military specification part number.

EXAMPLE: Military specification part number

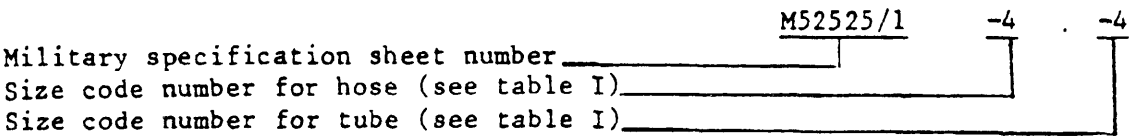

The approved item name of this item, in accordance with the Federal Item Name Directory for the Federal Catalog System, Handbook H6, Section A, is Adapter, Tube to Hose.

Custodian:
Army - ME


Preparing activity:
Army - ME

Review activities:
Army - GL
DLA - CS

Project 4730-0517

User activities:
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:22Z
Check the source to verify that this is the current version before use.

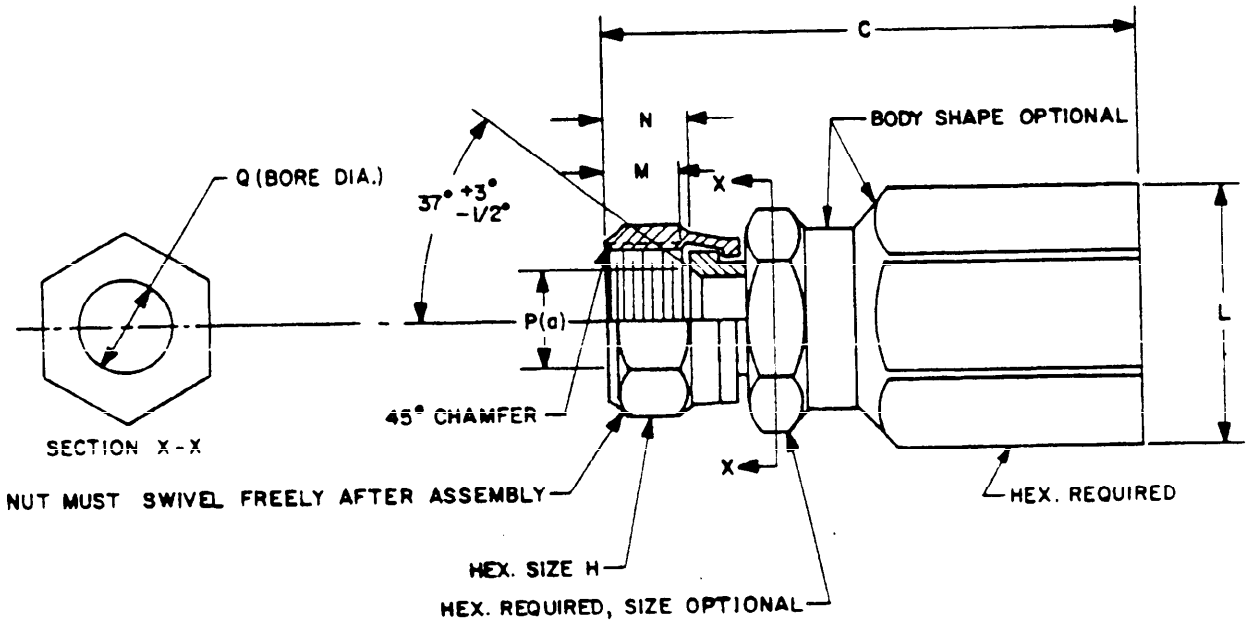

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 F I M.

FIGURE 1. Fitting, screw-on to 37° flare, straight.

X-3355A

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:22Z
Check the source to verify that this is the current version before use.