
INCH-POUND
MIL-C-55302/150B
17 November 1988
SUPERSEDING
MIL-C-55302/150A
18 December 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG WITH SOCKET CONTACTS, 2 114 INCHES LENGTH, 2 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

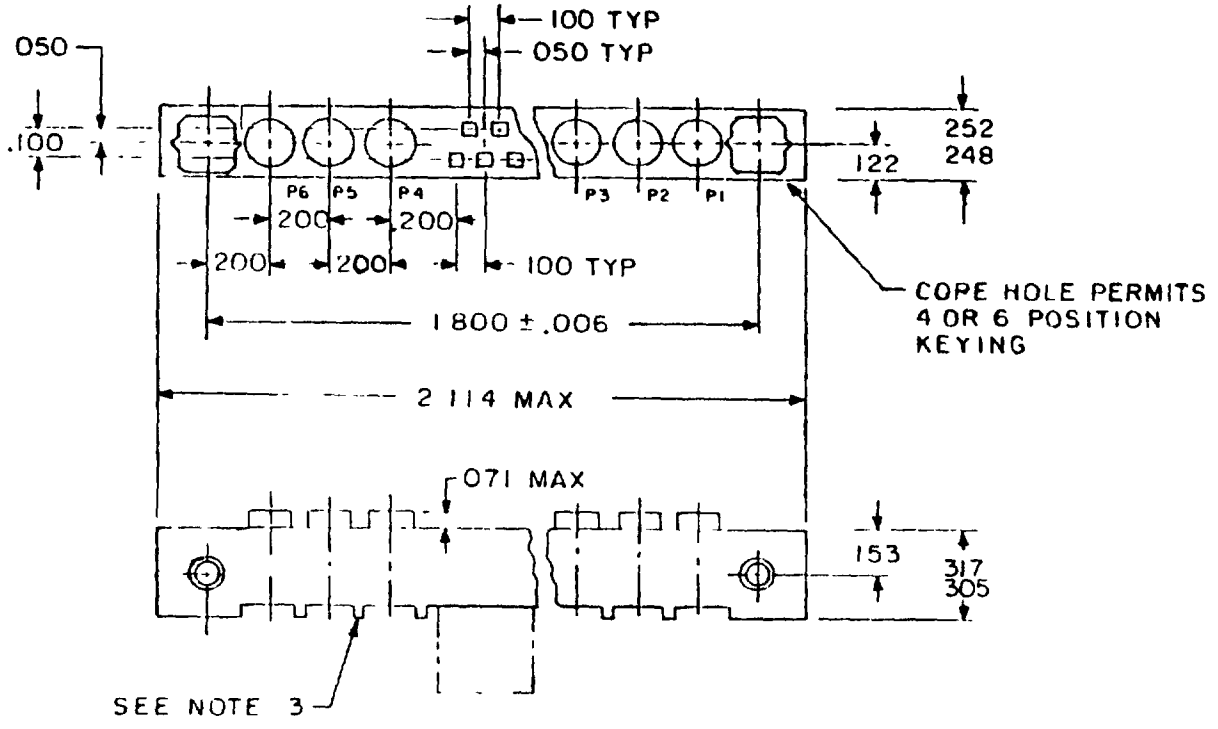

Inches	mm	Inches	mm
.006	0.15	.248	6.30
.050	1.27	.252	6.40
.071	1.80	.305	7.75
.100	2.54	.317	8.05
.122	3.10	1.800	45.72
.153	3.89	2.114	53.70
.200	5.08		


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Standoffs are located between each cable hole and between each hole and contact hole set.

FIGURE 1 Connector, plug (100 inch spacing)


AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

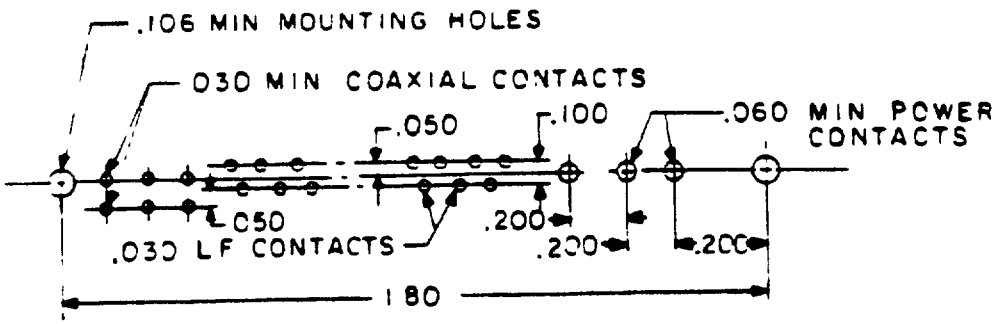

VERTICAL MOUNTING

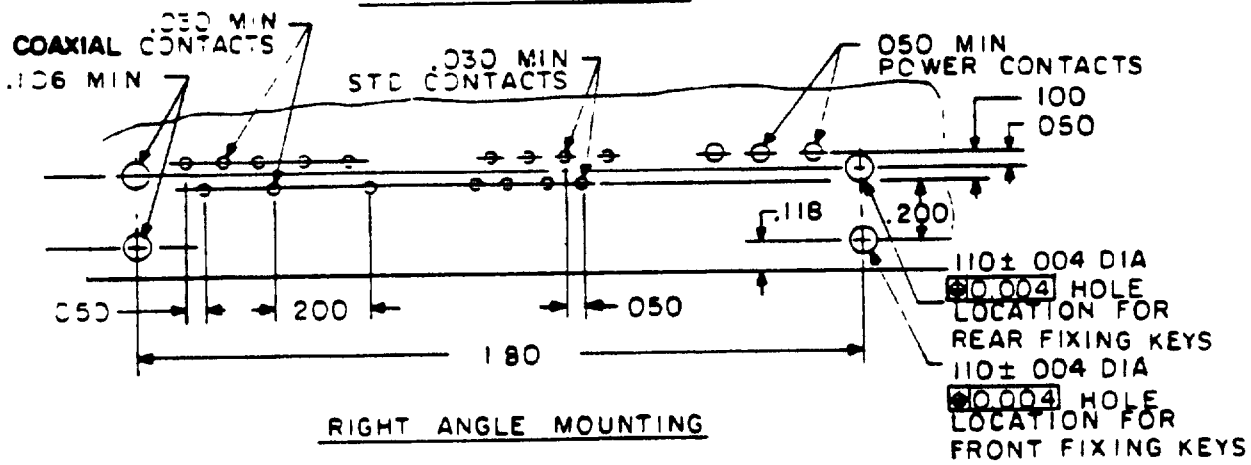

RIGHT ANGLE MOUNTING

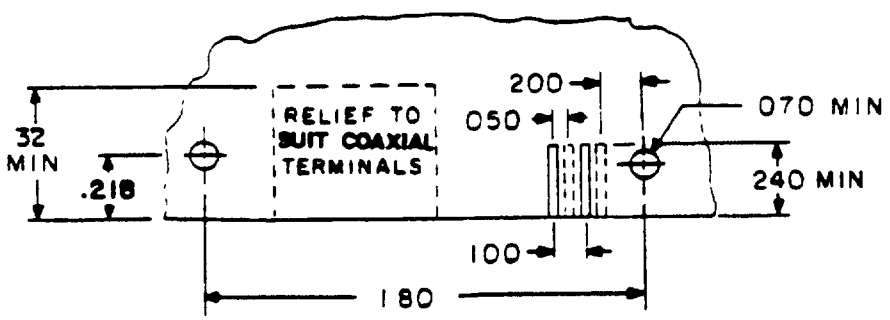


EDGE CARD MOUNTING

Inches	mm
.030	0.76
.050	1.27
.060	1.52
.070	1.78
.100	2.54
.106	2.69
.118	3.00
.200	5.08
.240	6.10
.370	8.40
1.80	45.7


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 2. Recommended hole patterns.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

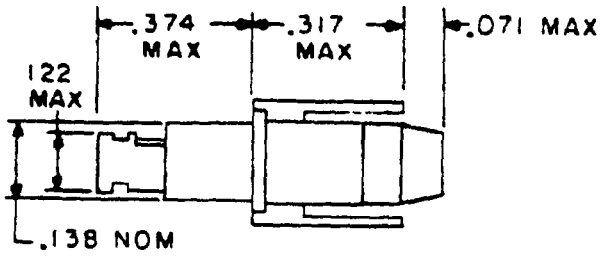


Flexible cables subpart "A"

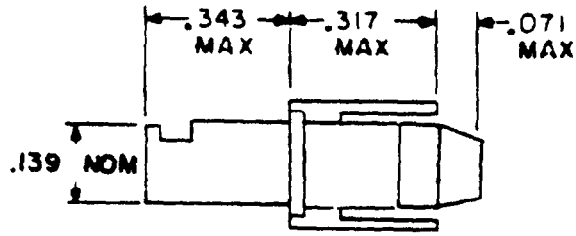


Semirigid cables subpart "B"

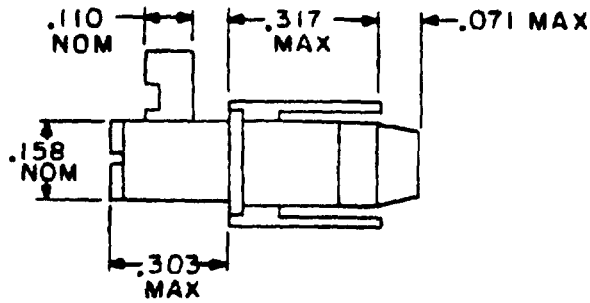


90° Flexible cables subpart "C"

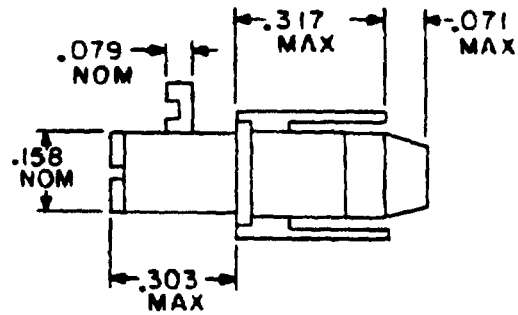


90° Semirigid cables subpart "D"

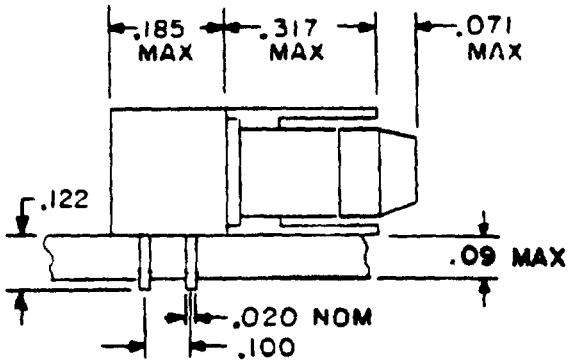

90° PCB mounting cables subpart "E"

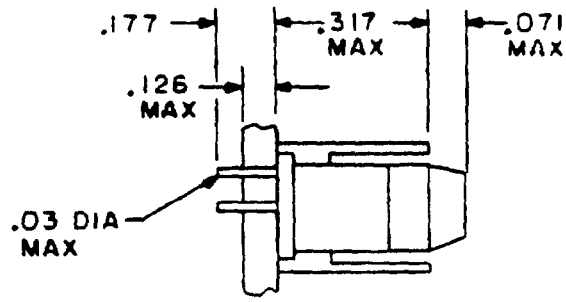


Vertical mounting PCB subpart "F"

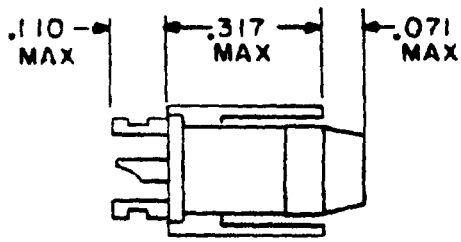


Solder posts twisted braid subpart "G"

FIGURE 3. Coaxial configurations.


Source: https://assist.dla.mil -- Downloaded: 202640-22T22:53Z
Check the source to verify that this is the current version before use.



Solder bucket subpart H

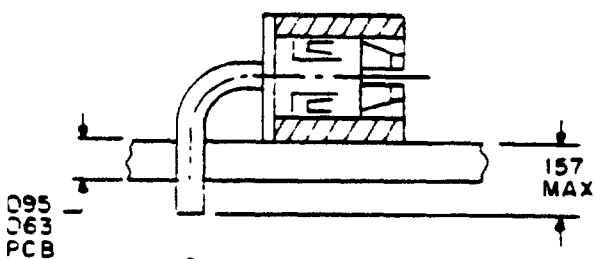

90° PCB mounting subpart J



Vertical mounting PCB subpart K

Inches	mm	Inches	mm
.020	0.51	.138	3.51
.03	0.8	.139	3.53
.063	1.60	.155	3.94
.071	1.80	.157	3.99
.079	2.01	.158	4.01
.094	2.39	.177	4.50
.095	2.41	.185	4.70
.100	2.54	.271	6.88
.110	2.79	.303	7.70
.122	3.10	.317	8.05
.126	3.20	.374	9.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 3. Coaxial configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.






CONTACT ARRANGEMENT		KEYING
A		4 WAY
B		6 WAY
C		4 WAY
D		6 WAY
E		4 WAY
F		6 WAY

FIGURE 4. Contact and keying arrangements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.




Subpart 1
90° Solder tails

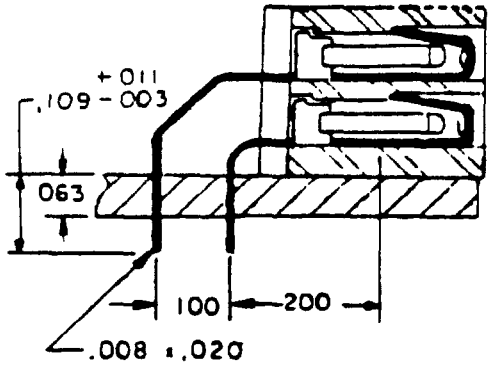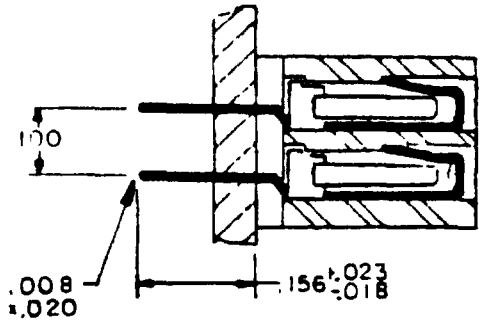


Subpart 3
Solder tails

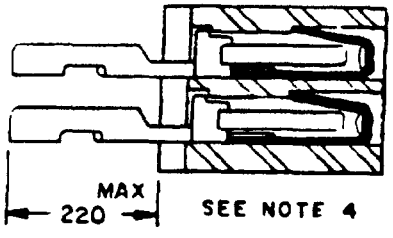


Subpart 4
Solder terminals

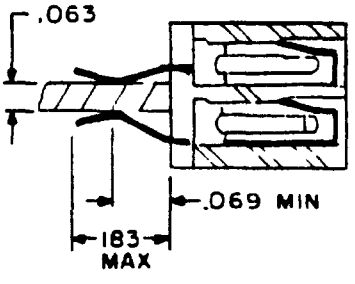


Subpart 2
Card edge



Subpart 5

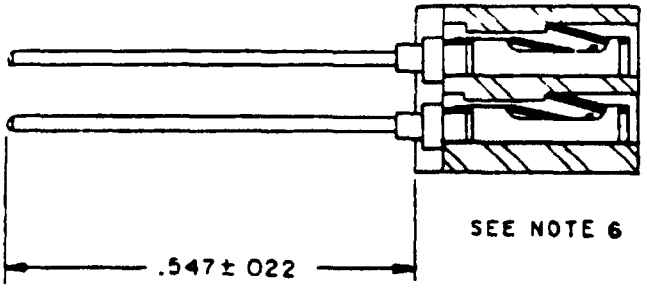

Subpart 6
Wire wrappost

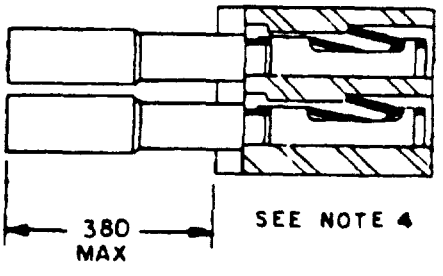


Subpart 7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no 22-[illegible] AWG wires.
6. Contact with .025 inch (0.64 mm) wrappost in accordance with MIL-STD-1130.


Inches	mm	Inches	mm
003	0 08	100	2 54
008	0 20	109	2 77
011	0 28	156	3 96
018	0 46	183	4 65
020	0 51	191	4 85
022	0 56	200	5 08
023	0 58	220	5 59
063	1 60	380	9 65
069	1 75	547	13 89

FIGURE 5 Contact terminations

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

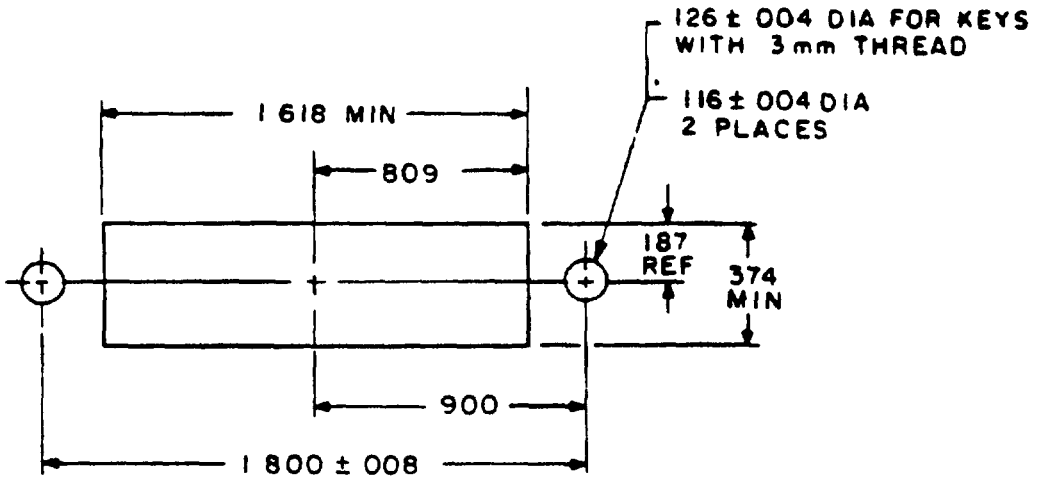

FIXED MOUNT

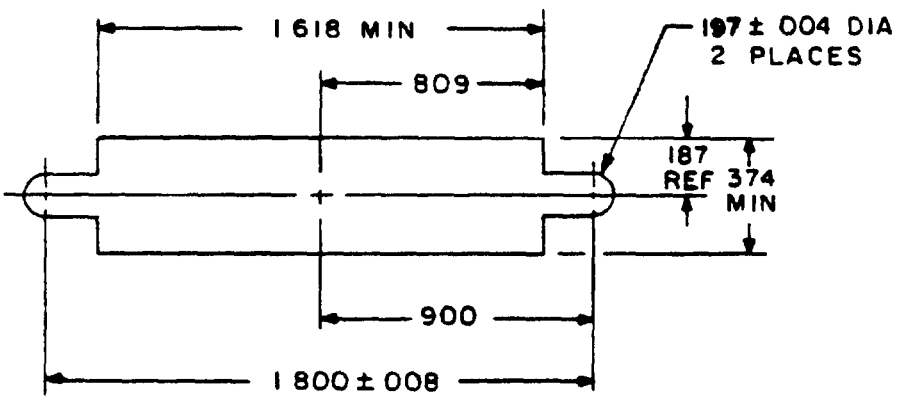

FLOATING MOUNT

Inches	mm	Inches	mm
.004	0.10	.374	9.50
.008	0.20	.809	20.55
.116	2.95	.900	22.86
.187	4.75	1.618	41.10
.19	4.83	1.800	45.72

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Floating mount panel thickness .085 (2.15 mm) maximum.

FIGURE 6. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 7.

Contact identification: See figure 4.

Contact retention: Coaxial and power: 11.25 pounds minimum.
Signal: 4 pounds minimum.

Mating and unmating force (per contact):

	Coaxial	Power	Signal
(Min)	7.2 ounces	3.6 ounces	0.7 ounce
(Max)	36 ounces	18 ounces	3.6 ounces

Values for each connector to be addition of contacts according to contact type.

Contact separation:

Signal: 0.5 ounce minimum using test pins as specified in MIL-C-55302/142.

Co-Axial: 0.5 ounce minimum using test pins as specified in MIL-C-55302/149.

Power: 1.5 ounce minimum using test pins as specified in MIL-C-55302/149.

Contact resistance: 12 milliohms maximum.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating:

Power contacts: 25 amperes at 25°C.

Coaxial contacts: .5 ampere at 25°C.

Signal contacts. 3 amperes at 25°C.

Keying: Moldings and mounting hardware provide 16 or 36 polarizing positions according to choice of 4 or 6 way capability. Keys are constructed in accordance with MIL-C-55302/154. Connectors are supplied keyed in "1" and "A" positions, except for 1/4-turn which are keyed "F" and "6". When required connectors can be easily keyed to desired position by using a simple wrench.

Removal tools: Coaxial and power contacts: M81969/41-01.
Signal contacts: M81969/40-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154.

Mating connectors: Shall conform to MIL-C-55302/145.

Oversize pin exclusion test. Not applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/150 * * * 2 *

- Specification sheet number / Plug with socket contacts
- Contact arrangement (see figure 4)
- Contact termination - 3 amperes (see figure 4)
- 0 - not applicable
- Contact termination - coaxial/power (see figure 3)
- X - less coaxial and power contact
- Indexing configuration
- 2 - square post (16 positions)
- 1 - hex post (36 positions)
- Mounting hardware (See MIL-C-55302/154)

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3652-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.