INCH-POUND

MIL-F-63232A (AR)
AMENDMENT 2
12 JULY 1989

SUPERSEDING
AMENDMENT 1
21 June 1985

MILITARY SPECIFICATION

FUZE, PIBD, M740, FUZE MODULE FOR

This amendment forms a part of Military Specification MIL-F-63232A (AR) dated 12 January 1984, and is approved for use within the U.S. Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 3

3.3.1.1.2 Delete in its entirety and substitute the following:

"3.3.1.1.2 Electrical isolation. The fuze module assembly external structure, consisting of fuze container, support plate and forward plate shall be electrically isolated from each of the fuze assemblies with a minimum resistance of 10 megohm. The two fuze assemblies shall be electrically isolated from each other with a minimum resistance of 10 megohm.

PAGE 7

3.3.2.4, tolerance of Level: Delete "± 0%" and substitute "±10%"

PAGE 19

4.4.2.3, Minor 201, Requirements paragraph: Delete "3.2." and substitute "3.3.1.1.2"

PAGE 25

Delete Majors 112 and 113 in their entirety and add the following:

112 Arming verification		100%	3.3.1.1.1	4.5.2.1.7
113 Initiation (3)	(1)	100%	3.3.1.1.5	4.5.2.1.6
114 Explosive Output (3)	(1)	100%	3.3.1.1.6	4.5.2.1.6

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

* Delete 4.4.3.1. in it's entirety and add the following:

"4.4.3.1 Initial sampling procedure for fize module assembly. Beginning with the first lot produced and continuing until three (3) consecutive lots have been found acceptable, a sample of thirty-two (32) fuze modules assemblies shall be randomly selected from each lot and radiographed. Each radiograph shall be inspected for defects as described in paragraph 4.4.3.3. If two (2) or more defects are found, then the lot shall be rejected. If one (1) defect is found, then proceed with testing as described in paragraph 4.4.3.1.1. If no defects are found, then the sample is to be divided into two (2) groups, A and B, each consisting of sixteen (16) fuze modules. Testing shall continue as shown in Figure 2."

* Delete 4.4.3.1.1 in it's entirety and add the following:

"4.4.3.1.1 Post radiographic testing (initial procedure). If the sample contains one (1) defect, as described in paragraph 4.4.3.4, then identify and mark the fuze containing the defect with the letters "AD" if aft channel contains defect and with the letters "FD" if the forward channel contains the defect. Remove sixteen (16) non defective fuze modules and return them to the lot. The remaining sixteen (16) fuze modules shall be tested per 4.4.2.9. The nondefective channel of the marked fuze shall be functioned. If one (1) or more fuze channels or fuze modules is found defective, then the lot shall be rejected."

* Add the following paragraphs:

"4.4.3.1.2 Subsequent sampling procedure for fuze module assembly. After three (3) lots have complied with the criteria of 4.4.3.1, the sample size shall be twenty-five (25) fuze module assemblies. The entire sample shall be radiographed and inspected for defects as described in 4.4.3.3. If two (2) or more defects are found, then the lot shall be rejected. If one (1) defect is found, then proceed with testing as described in 4.4.3.1.3. If no defects are found, then the sample is to be divided into two (2) groups, A & B. Group A shall consist of eleven (11) fuze modules and Group B will consist of the remaining fourteen (14) fuze modules. Testing shall continue as shown in Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

4.4.3.1.3 Post radiographic testing (subsequentprocedure). If the sample contains one (1) defect, as described in paragraph 4.4.3.4, then identify and mark fuze containing the defect with the letters "AD", if the aft channel contains the defect and with the letters "FD" if the forward channel contains the defect. Remove nine (9) nondefective fuze modules and return them to the lot. The remaining sixteen (16) fuze modules shall be tested per 4.4.2.9. The nondefective channel of the marked fuze shall be functioned. If one (1) or more fuze channels or fuze modules are found defective, then the lot shall be rejected."

* Add the following paragraphs:

4.4.3.3 Radiograph inspection for assembly defects. The radiographs of the fuze module shall be inspected for assembly defects and errors that will cause nonfunctioning of an S & A or fuze module. The items listed in paragraph 4.4.3.4 shall be verified. Noncompliance with these requirements will cause the fuze to be classified accordingly.

4.4.3.4 Reject criteria for radiographic examination. The presence of the following items shall be verified upon inspection of the radiographs as compared to the established standards. Noncompliance of any requirement shall be classified accordingly:

a. Proper length screws securing the base plate assembly. (1 defect)

b. Proper length screws securing the support plate. (1 defect)

c. Detonators, lead cup, rotor, g-wt, S & A and aft Fuze cup. (1 defect)

d. Detonators, lead cup, rotor, g-wt, S & A and forward Fuze cup. (1 defect)

e. Evidence of other missing or broken components in each fuze channel shall be classified as one defect.

4.4.3.5 Radiograph standards. Standards shall be developed that depict acceptable fuzes where the items listed in paragraph 4.4.3.4 can easily be identified. Individual standards shall be developed that depict fuzes which contain each defect listed in paragraph 4.4.3.4. These standards shall be approved by the Government and used during the inspection listed in paragraph 4.4.3.3.

* Add Figure 2 and Figure 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

INITIAL SAMPLING PLAN

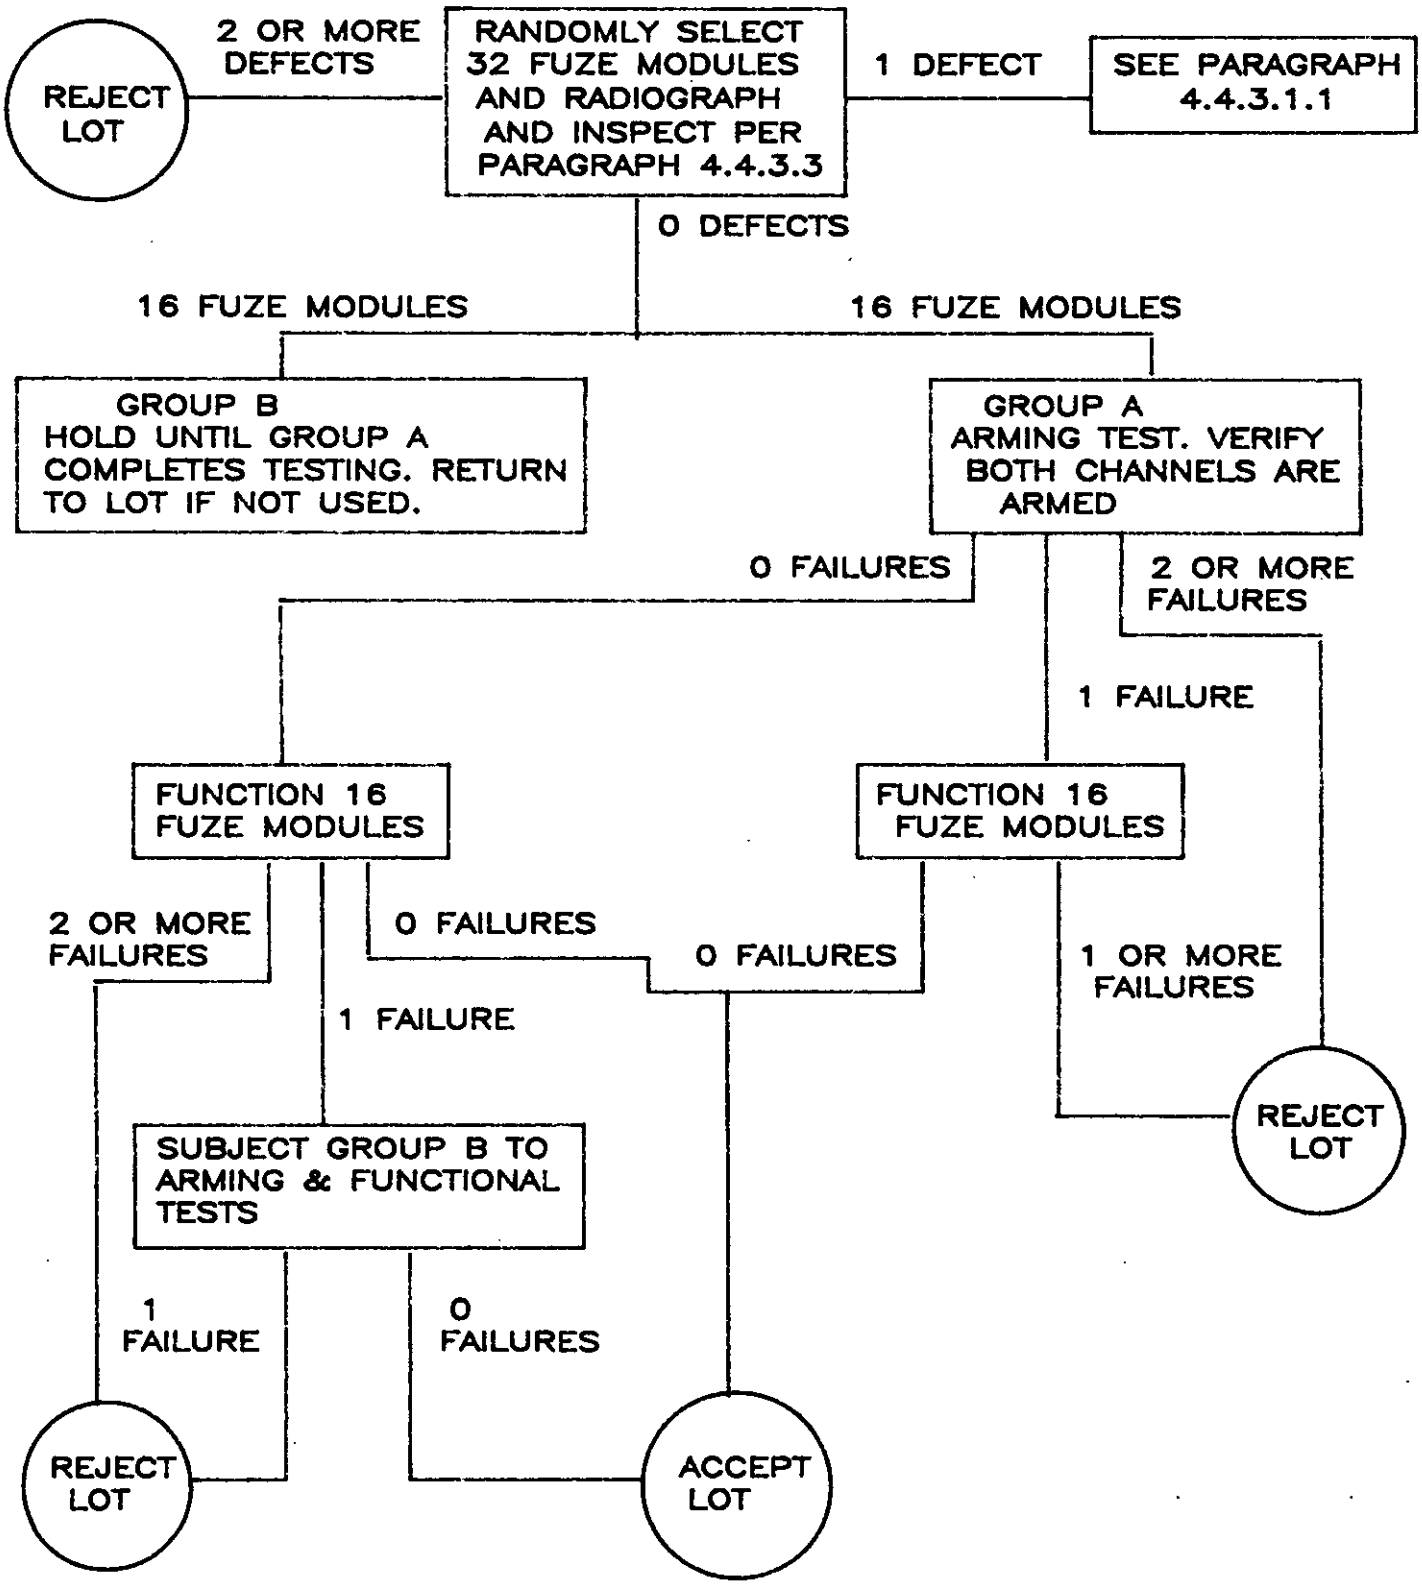


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

SUBSEQUENT SAMPLING PLAN

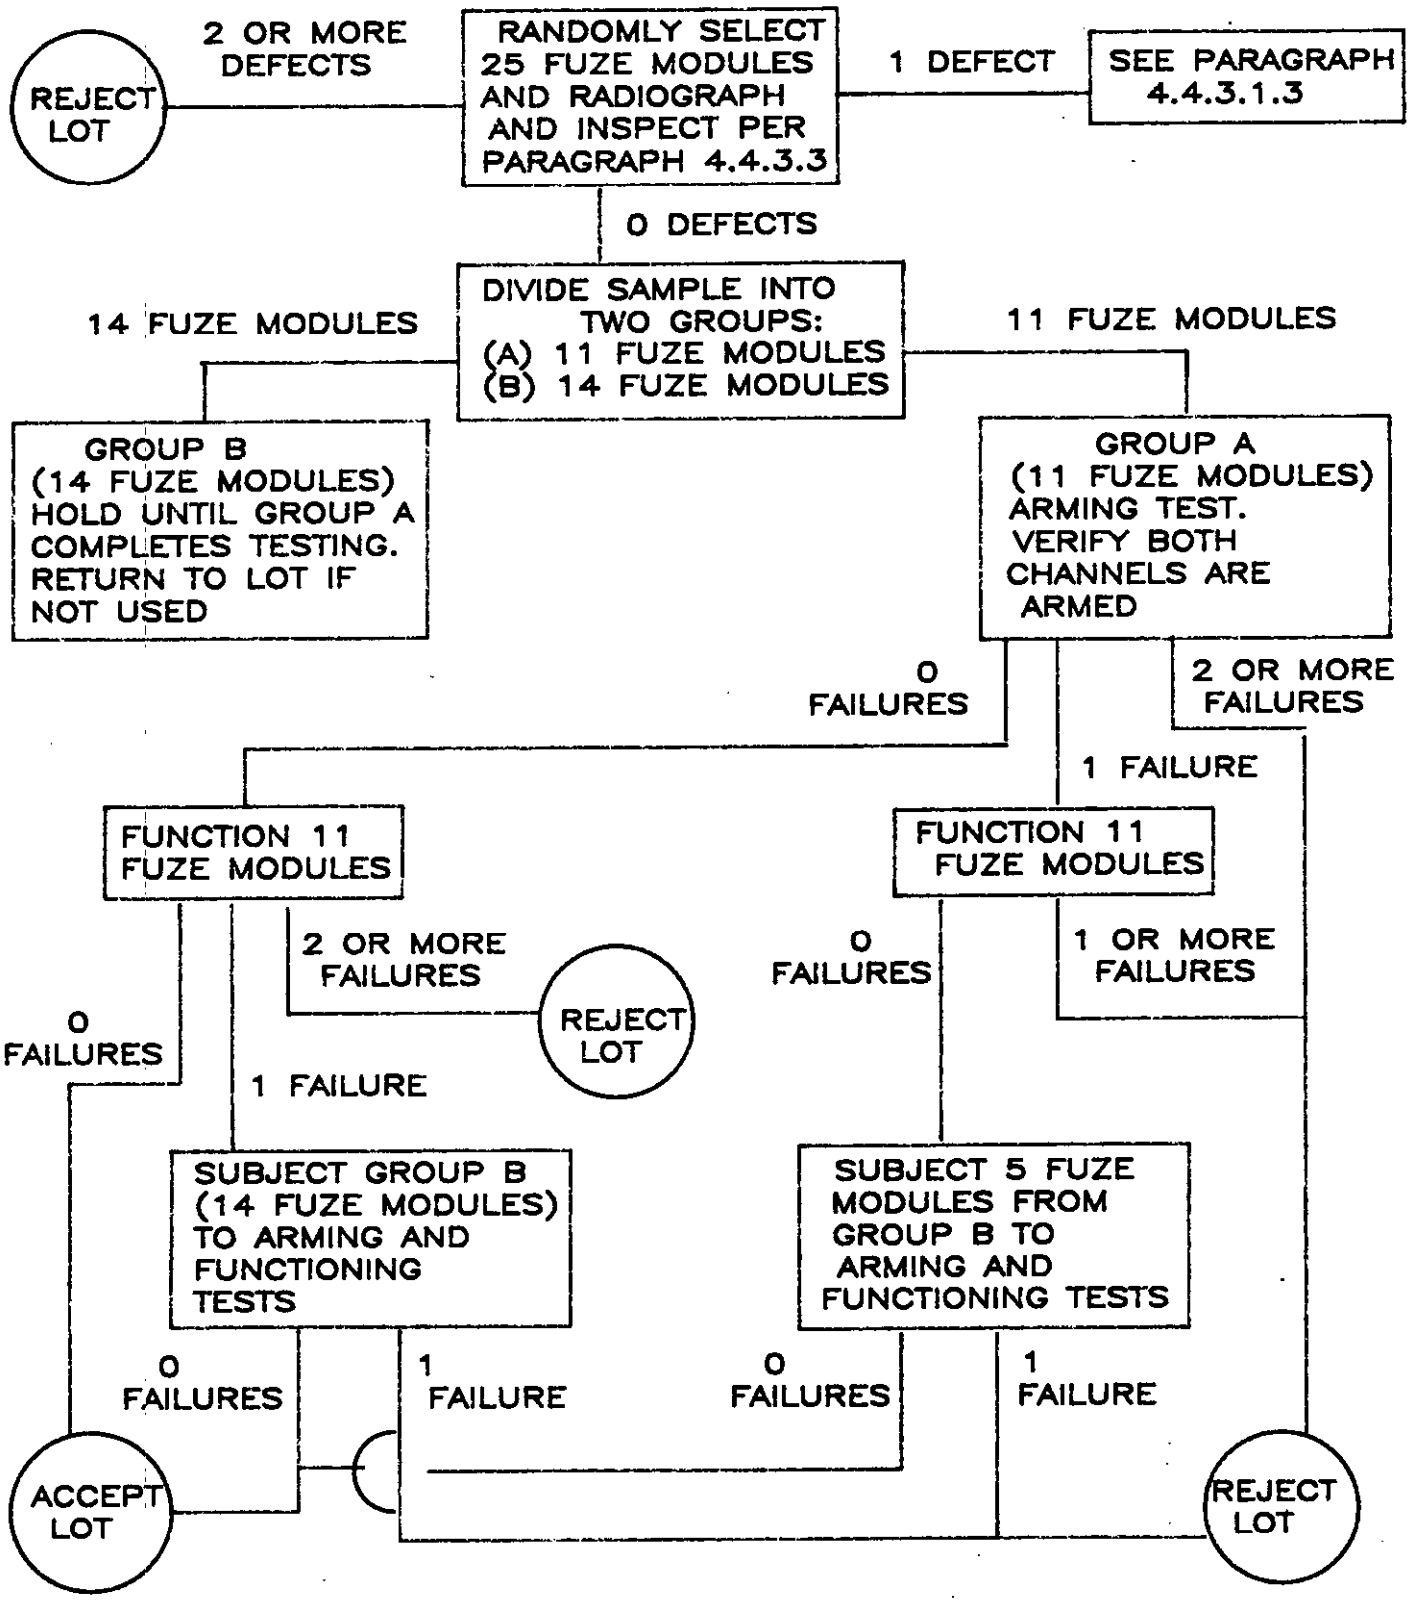


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

PAGE 30

* Delete 4.5.2.1.5.1 in it's entirety and substitute the following:

"4.5.2.1.5.1 Fuze module assembly arming, high temperature. The fuze module assembly with the shorting bars removed shall be mounted in a carrier with test circuitry which supplies an electrical enabling signal at 0.4 ± 0.1 seconds after setback to function the piston actuators. The carrier/fuze module assembly shall then be conditioned at 145, +5, -0°F for a minimum of one hour. Within 10 minutes after removal from the temperature chamber subject the carrier/fuze module assembly using a test projectile to an acceleration of 1200 ± 400 g's for a period 10 milliseconds minimum in the direction as shown in Figure 1. Remove the armed fuze module assembly from the test/simulated projectile and verify that both S & A assemblies are armed in accordance with 4.5.2.1.7. Place the armed fuze in a safety container and subject it to the test specified in 4.5.2.1.6.1."

* Delete 4.5.2.1.5.2 in it's entirety and substitute the following:

"4.5.2.1.5.2 Fuze module assembly arming, low temperature. The fuze module assembly with the shorting bars removed shall be mounted in a carrier with test circuitry which supplies an electrical enabling signal at 0.4 ± 0.1 seconds after setback to fire the piston actuators. The carrier/fuze module assembly shall then be conditioned at -25 +0, -5°F for a minimum of one hour. Within 10 minutes after removal from the temperature chamber subject the carrier/fuze module using a test projectile to an acceleration of 1200 ± 400 g's for a period of 10 milliseconds, minimum in the direction as shown in Figure 1. Remove the armed fuze module assembly from the test/simulated projectile and verify that both S & A assemblies are armed in accordance with 4.5.2.1.7. Place the armed fuze in a safety container and subject it to the test as specified in 4.5.2.1.6.2."

PAGE 32

* Add the following paragraph:

"4.5.2.1.7 Fuze channel arming verification. Verification of arming for each S & A assembly may be performed visually or automatically. The procedures and test equipment used for verification of arming shall be approved by the Government."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.

"4.5.2.5.2 line 6: Delete "2.5 ± 1khz" and substitute "25 ± 1khz"

The margins of this amendment are marked with an asterisk or vertical line to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability wheresoever for any inaccuracies in these notations. Bidders and contrctors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A568)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:26Z
Check the source to verify that this is the current version before use.