MIL-B-49450/7A(ER)
18 June 1987
SUPERSEDING
MIL-B-49450/7(ER)
16 January 1987

MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, CELL

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cell described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49450(ER).

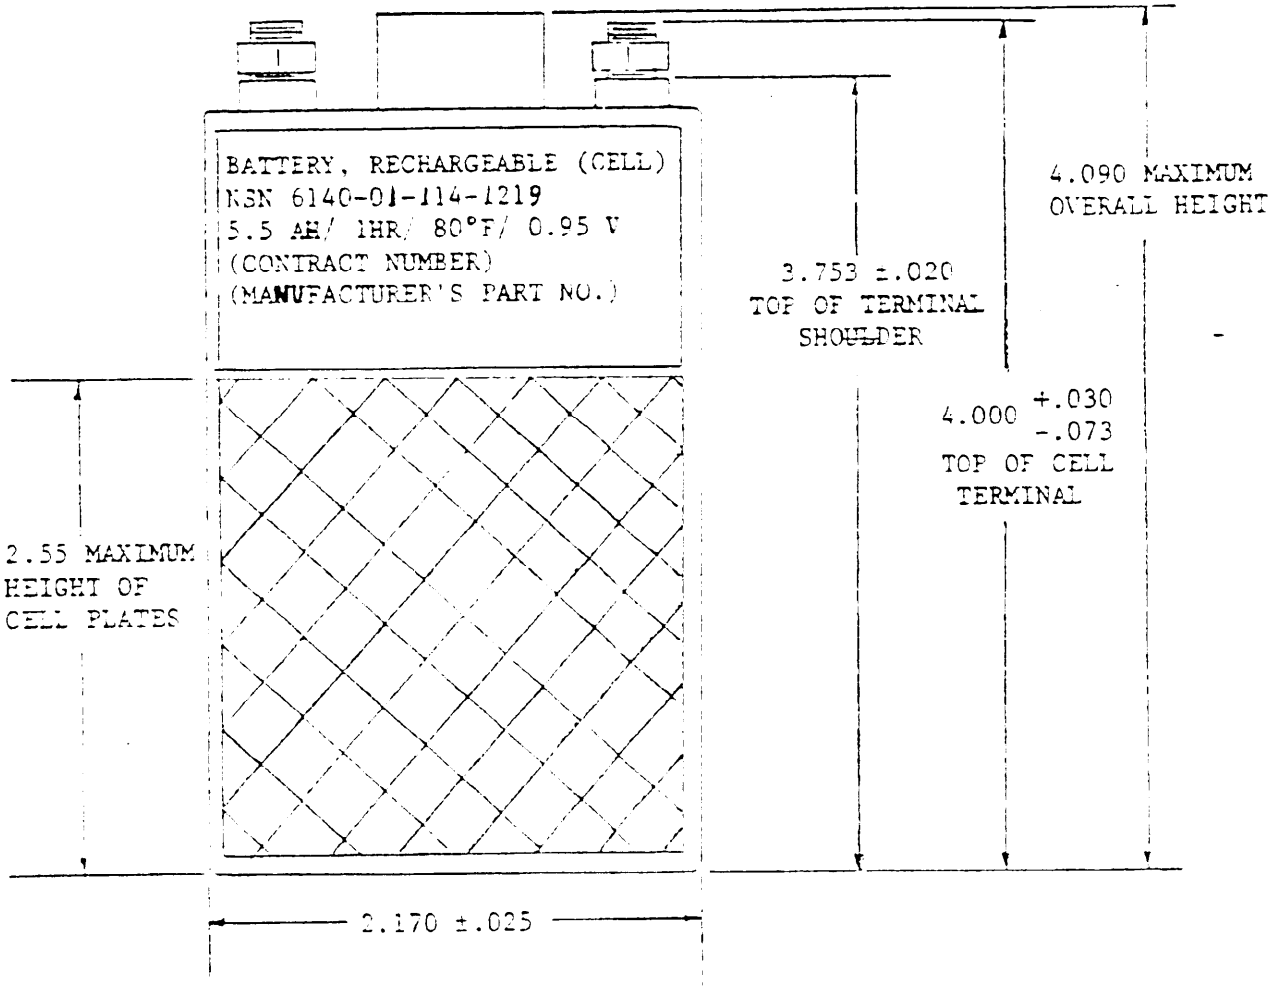


FIGURE 1. MARKINGS AND DIMENSIONS OF CELL (FRONT VIEW).

AMSC N/A FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

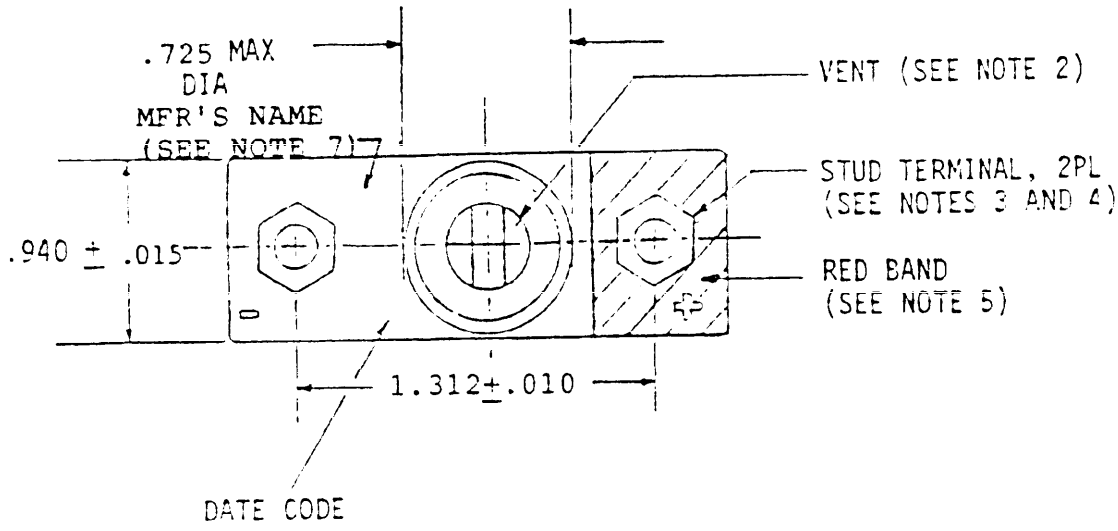


FIGURE 2. TOP VIEW OF CELL (METHOD 1).

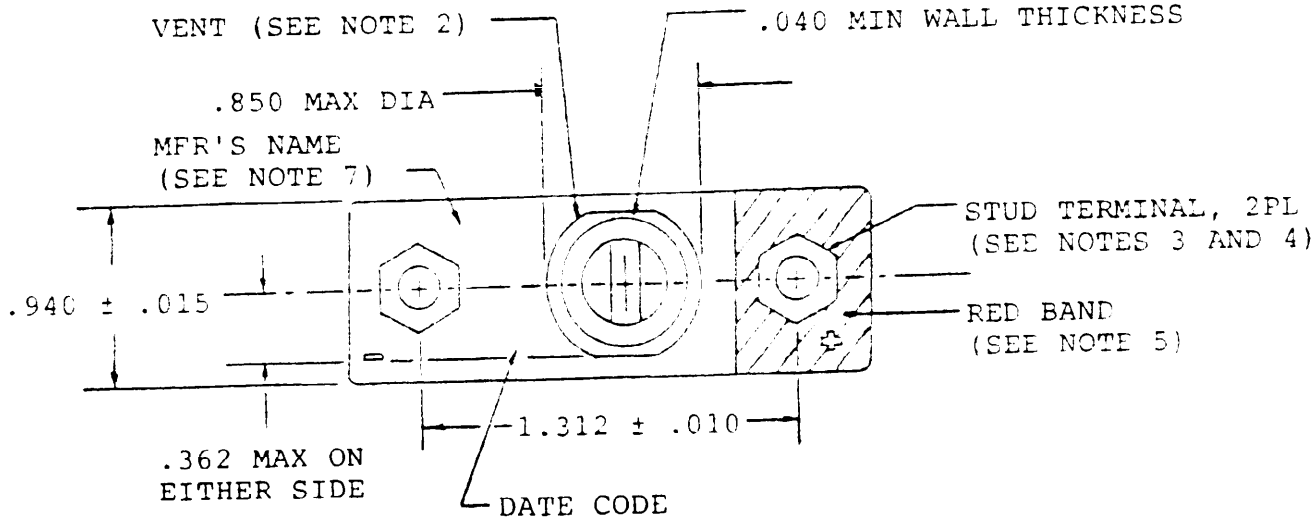


FIGURE 3. TOP VIEW OF CELL (METHOD 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

DRAWING NOTES:

1. All dimensions shown in figure are in inches, unless otherwise specified.

2. Cell vent shall be in accordance with MIL-B-49450/4(ER).

3. The cell shall use two threaded stud type terminals. The stud terminals shall have 10-32 threading and shall be UNF-2A, Grade 1018 or L1018 cold rolled steel per AMS-5069, ASTM-A-108 with M212 finish per MIL-F-14072.

Alternate: The stud terminals shall have 10-32 threading and shall be UNF-2A, Grade 12L14 cold finished carbon steel, free machining per QQ-S-637 with M313 finish per MIL-F-14072 (QQ-N-290 Grade E, without copper flash).

4. Per stud terminal- 10-32, 5/16 inch hexagonal nuts and one Belleville spring in accordance with MIL-B-49450/3(ER).

5. The positive half of the cell cover shall be permanently dyed red. Maximum width of red band shall be no less than 0.5 inches.

6. Position of the cell label is optional.

7. The manufacturer's name or symbol shall be added to the cell cover as shown by embossing or equivalent. Letter size shall be 3/32 ± 1/32 inch.

REQUIREMENTS:

Nomenclature:	Battery, Rechargeable, Cell
Rated Capacity:	5.5 ampere-hours
Voltage (Nominal):	1.2 volts

TEST	DISCHARGE RATE (Amps)	CUT-OFF VOLTAGE (V)	CAPACITY (AH) MINIMUM
Capacity	5.5	0.958	5.5
Cycle Life			
Normal Rate	5.5	0.958	5.0
High Rate	55.0	0.76	1.83 1/
Vibration	1.1	1.0	5.5
Altitude	5.5	0.958	4.6
Humidity and Charge Retention	5.5	0.958	4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

TEST	DISCHARGE RATE (Amps)	CUT-OFF VOLTAGE (V)	CAPACITY (AH) MINIMUM
High Rate Discharge and Low Temperature	55.0	0.68	2.75
High Rate Discharge and Operating Position	55.0	0.76	4.6

NOTE: 1/ Discharge on cycling test limited to 2 minutes.

Preparing Activity:
Army-ER

(Project 6140-A663)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.