
MILITARY SPECIFICATION SHEET

PROTECTORS, ELECTRICAL COMMUNICATION CIRCUITS

ARRESTER ASSEMBLY, GAS TUBE, FAIL SAFE (FS), TYPE A3

The complete requirements for procuring the arrester described herein shall consist of this document and the latest issue of Specification MIL-P-55624.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

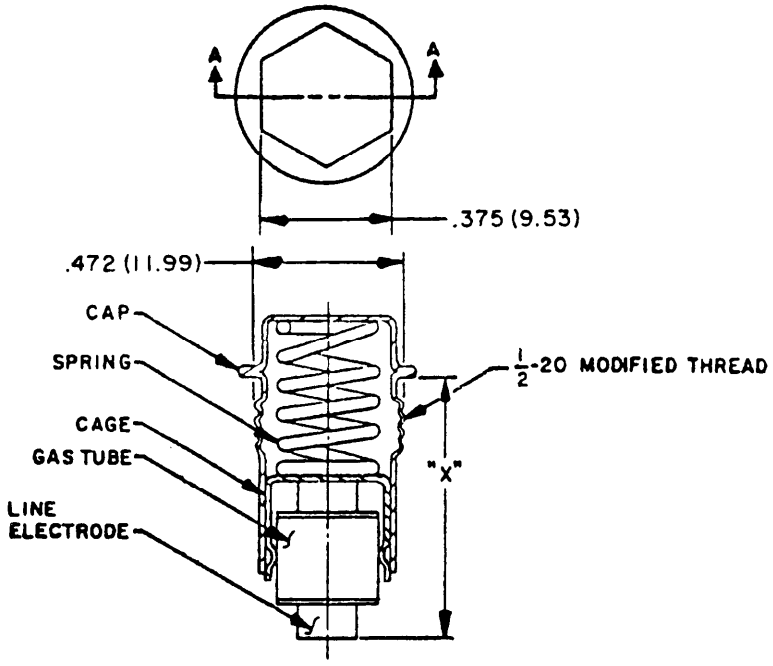

SECTION A-A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. When the spring is compressed so that distance "X" is .620(15.75 mm) inch, the force exerted shall not exceed 9 pounds; when "X" is .683(17.35 mm) inch, the force shall be a minimum of 1 pound.
5. Unless otherwise specified tolerance shall be ±.010(.25 mm).

FIGURE 1.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figure. The requirements herein are not intended to limit internal construction of the assembly.

Materials:

Cap: Brass or copper.

Spring: Steel.

Cage: Brass or copper.

Gas tube: May consist of the following:

Body: High alumina ceramic or glass.

Electrodes: Cadmium or nickel plated.

Gas: Mixtures of argon and hydrogen. (If material other than argon and hydrogen is used, prior approval must be obtained from the qualifying agency.)

Fusible component (when applicable): The material used shall be formulated to melt at sustained currents of 30 amperes or more.

Cap: Shall be at ground potential at all times.

Voltage breakdown: See table I.

Ability to resist permanent grounding: Average number of discharges shall be 30 or more.

Color code: The gas tube shall either be color coded with a dot not less than 1/16-inch in diameter as specified in table I, or the dc breakdown voltage shall be shown on the arrester in printed letters. This dot identifies the voltage breakdown (arc-over), dc.

Use with: MIL-P-55624/3, style P3 or MIL-P-55624 4, style P4 protector assembly.

Part number: M55624/7-(dash number from table I).

TABLE I

Dash no.	Arrester type	Breakdown voltage,dc	Color code
001	A3	200-450	Orange
002	A3	680-920	Black

Custodians:
Army - EL
Navy - YD
Air Force - 80

Review activities:
Army - MU, MI, SL,EL
Navy - EC
Air Force - 80, 11
DSA - ES

User activities:
Army - AT, WC, ME
Navy - MC, SH
Air Force -

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5920-0291-7)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:43Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION [illegible]

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:43Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL-[illegible]
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:43Z
Check the source to verify that this is the current version before use.