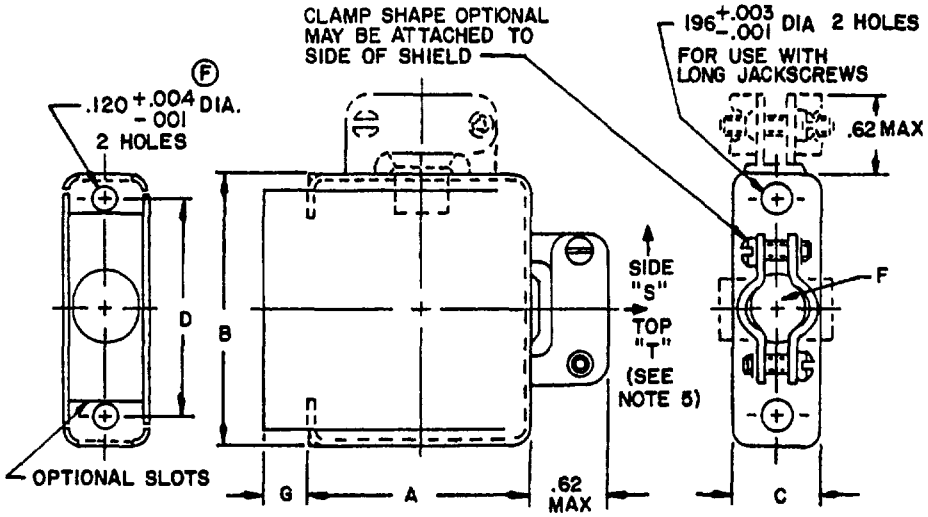


MS part number	Connector size (No. of contacts)	A Min Max Ⓕ	B ±0.016	C ±0.016	D ±0.005	F Min. cable opening sq. inch	G ±0.047
MS24132-1T MS24132-1S	7	1.18 1.35	1.218	0 437	0 906	0 07	0 265
MS24132-2T MS24132-2S	9	1.18 1.35	1.312	0 437	1.000	0.16	0 265
MS24132-3T MS24132-3S	14	1.18 1 35	1.250	0.500	0.937	0.19	0.265
MS24132-4T MS24132-4S	20	1.18 1.35	1 562	0.500	1.250	0.22	0.265
MS24132-5T MS24132-5S	26	1.18 1.35	1.625	0.634	1.312	0.26	0.265

The following part numbers are the same as those listed above except the two .120 dia thru holes for mounting the insert are threaded and the two .196 holes are omitted THESE PARTS ARE NOT RECOMMENDED FOR NEW DESIGN. PARTS COVERED BY PREVIOUS ISSUES OF THIS STANDARD BUT NOT INCLUDED IN THIS ISSUE SHOULD BE PROCURED COMMERCIALLY.

DESIGN STANDARD FOR USE WITH MIL-C-28748 CONNECTORS.

Ⓕ denotes changes

APPROVED 31 Aug 54 REVISED Ⓓ 20 May 70 Ⓔ 23 Jun 72 Ⓕ 1 JUN 76

User activities: Army ME, AM, WC; Navy MC, OS, SH; Air Force
Reviewer activities: Army MI, AT; Navy AS; Air Force 11, 80; DSA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from its document

P A Navy - EC	International interest	TITLE	MILITARY STANDARD
Other Cust AF - 85 Army - EL		SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20 AND 26 RACK AND PANEL CONTACT CONNECTOR	MS24132
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5935

MS part number	Connector size (No. of contacts)	Thread size
MS24132-6T MS24132-6S	7	4-40 UNC-2B
MS24132-7T MS24132-7S	9	4-40 UNC-2B
MS24132-8T MS24132-8S	14	4-40 UNC-2B
MS24132-9T MS24132-9S	20	4-40 UNC-2B
MS24132-10T MS24132-10S	26	4-40 UNC-2B

INCHES	MM	INCHES	MM
.001	.03	.62	15.75
.003	.08	.634	16.10
.005	.13	.89	22.61
.016	.41	.906	23.01
.047	1.19	.937	23.80
.07	1.78	1.000	25.40
.120	3.05	1.11	27.19
.16	4.06	1.18	29.97
.19	4.83	1.218	30.94
.196	4.98	1.25	31.75
.22	5.59	1.312	32.42
.26	6.60	1.35	33.29
.265	6.73	1.562	39.67
.437	11.10	1.625	40.28
.500	12.70		

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.016 (.41 mm).
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. For shield with top cable opening suffix part number with 'T'.
   For shield with side cable opening suffix part number with 'S'.
5. Material: Aluminum alloy, per specification QQ-A-250/8, temper H32 .040 (1.02 mm) thick.
6. Finish: Anodize per specification MIL-A-8625, type I or type II.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

APPROVED 31 Aug 54 REVISED (F) For changes see sheets 1 and 2

User activities: Army - ME, AM, WC
Navy - MC, OS, SH
Air Force

Reviewer activities: Army - ML, AT
Navy - AS,
Air Force - 11, 80
DSA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

P A Navy - EC Other Cust AF - 85 Army - EL	International interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR 7, 9, 14, 20 AND 26 RACK AND PANEL CONTACT CONNECTOR	MILITARY STANDARD MS24132
Procurement Specification MIL-C-28748		SUPERSEDES	SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-2025-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:48Z
Check the source to verify that this is the current version before use.