
FED. SUP CLASS
4730

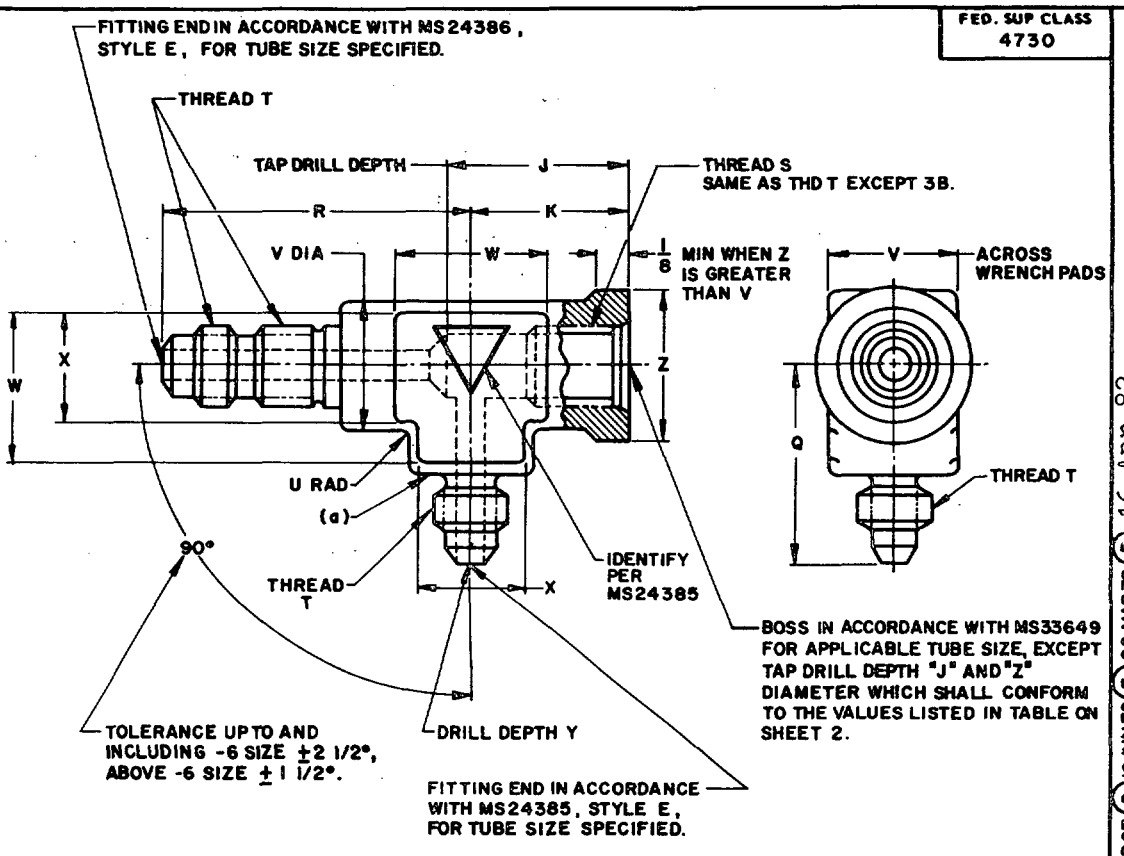

(a) THIS SURFACE SHALL BE FREE FROM LONGITUDINAL AND SPIRAL TOOL MARKS. ANNULAR TOOL MARKS SHALL NOT EXCEED 32 MICROINCHES AA (SEE ANSI B46.1).

MATERIAL: STEEL; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES OR FORGINGS (SEE PROCUREMENT SPECIFICATION).

FINISH: SEE PROCUREMENT SPECIFICATION.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.

NO CODE LETTER IN PART NUMBER FOR STEEL.

ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).

ADD J IN PLACE OF DASH FOR CRES, TYPE 304.

ADD K IN PLACE OF DASH FOR CRES, TYPE 316.

ADD S IN PLACE OF DASH FOR CRES, TYPE 347.

ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.

ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.

TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

EXAMPLE OF PART NUMBERS:

MS24389-8 - TEE, 1/2 TUBING, STEEL.
MS24389D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24389J8 - TEE, 1/2 TUBING, CRES, TYPE 304.
MS24389K8 - TEE, 1/2 TUBING, CRES, TYPE 316.
MS24389S8 - TEE, 1/2 TUBING, CRES, TYPE 347.
MS24389T8 - TEE, 1/2 TUBING, TITANIUM ALLOY.
(F) MS24389W8 - TEE, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE SURFACE OF THE CONE ENDS ON 100Z OF THE TEES OF A LOT SHALL BE INSPECTED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) DENOTES CHANGES

P.A. AIR FORCE-99 (F) Other Cust AIR FORCE-99	TITLE TEE, TUBE, INTERNAL THREAD ON RUN, PRECISION TYPE	MILITARY STANDARD MS 24389
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: ~~AN784~~ (F)	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F270

APPROVED 14 FEB 67 REVISED (A) 6 MAR 68 (B) 30 DEC 69 (C) 10 FEB 67 (D) 16 JUN 78 (E) 22 MAR 79 (F) 16 Apr 82

User activities:

Review activities: ARMY-ME, AV
NAVY-AS
DSC-CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force and is available for use by all Departments and agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

DASH NO.	TUBING OD	THREAD T (REF)	J +3/64 -0	K +3/64 -0	Q +3/64 -0	R +3/64 -0	U RAD	V	W MIN	X MIN	Y +3/64 -0	Z DIA
2	1/8	5/16-24UNJF-3A	23/32	5/8	29/32	1-15/32	1/16	1/2	15/32	5/16	29/32	9/16
3	3/16	3/8 -24UNJF-3A	13/16	11/16	31/32	1- 1/2	3/32	9/16	1/2		31/32	5/8
4	1/4	7/16-20UNJF-3A	29/32	3/4	1- 3/16	1- 3/4		3/4	13/16	7/16	1- 3/16	3/4
5	5/16	1/2 -20UNJF-3A	15/16									3/4
6	3/8	9/16-18UNJF-3A	1- 1/32	13/16	1- 1/4	2	1/8	7/8	25/32		1- 9/32	7/8
8	1/2	3/4 -16UNJF-3A	1- 1/4	1	1- 7/16	2- 5/32		1-1/16	29/32	1/2	1-15/32	1-1/16
10	5/8	7/8 -14UNJF-3A	1-15/32	1- 5/32	1- 5/8	2- 3/8					1- 3/4	1-3/16
12	3/4	1-1/16-12UNJ -3A	1- 3/4	1-11/32	1-13/16	2- 5/8		1-5/16	1- 3/32	5/8	1- 7/8	1-7/16
16	1	1-5/16-12UNJ -3A	2- 1/16	1-17/32	2- 1/16	2-27/32		1-5/8	1- 5/16	3/4	2- 3/32	1-11/16
20	1-1/4	1-5/8 -12UNJ -3A	2- 5/16	1-23/32	2- 1/4	3- 1/32		1-7/8	1- 1/2	7/8	2- 1/4	2

APPROVED 14 FEB 67 REVISED (F) FOR CHANGES SEE PAGES 1 & 2. 16 April 1982

User activities:

Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE-99	TITLE	MILITARY STANDARD
Other Cust AIR FORCE-99 (F)	TEE, TUBE, INTERNAL THREAD ON RUN, PRECISION TYPE	MS 24389
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: ~~AN704~~ (F)	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F270

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.