
FED. SUP CLASS 4730

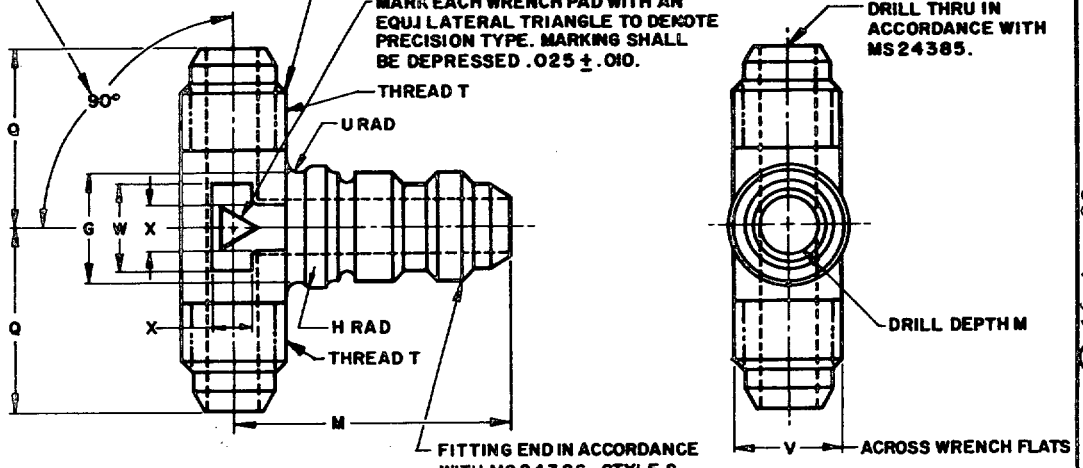

DASH NO.	TUBING OD	THREAD T (REF)	G DIA	H RAD	M +3/64 -0	Q +3/63 -0	U RAD
2	1/8	5/16-24UNJF-3A	5/16	1/32	1-13/32	53/64	1/16
3	3/16	3/8 -24UNJF-3A	3/8		1- 7/16	57/64	
4	1/4	7/16-20UNJF-3A	7/16	1/16	1-37/64	61/64	
5	5/16	1/2 -20UNJF-3A	1/2		1-39/64	1- 1/64	
6	3/8	9/16-18UNJF-3A	9/16	3/32	1-51/64	1- 5/64	3/32
8	1/2	3/4 -16UNJF-3A	3/4		2- 3/32	1-11/64	
10	5/8	7/8 -14UNJF-3A	7/8		2- 3/8	1-35/64	1/8
12	3/4	1-1/16-12UNJ -3A	1- 1/16		2-21/32	1-49/64	
16	1	1-5/16-12UNJ -3A	1- 5/16		2-25/32	1-59/64	
20	1-1/4	1-5/8 -12UNJ -3A	1- 5/8		3- 7/64	2- 5/32	3/16
24	1-1/2	1-7/8 -12UNJ -3A	1- 7/8		3-13/32	2-21/64	
28	1-3/4	2-1/4 -12UNJ -3A	2- 1/4		3-25/32	2-19/32	
32	2	2-1/2 -12UNJ -3A	2- 1/2		4- 3/32	2- 7/8	

DASH NO.	V ±1/64	W APPROX	X APPROX
2	5/16	5/16	3/16
3	3/8		1/4
4	7/16	3/8	
5	1/2	1/2	5/16
6	9/16		
8	3/4	5/8	7/16
10	7/8	3/4	
12	1-1/16	7/8	1/2
16	1-5/16	1-1/16	5/8
20	1-5/8	1-1/4	3/4
24	1-7/8	1-7/16	7/8
28	2-1/4	1-3/4	1-1/16
32	2-9/16	1-15/16	1-3/16

(G) DENOTES CHANGES

APPROVED 14 FEB 57 — REVISED (A) 6 MAR 58 (B) 20 APR 60 (C) 10 FEB 67 (D) 10 OCT 68 (E) 16 JUN 78 (F) 22 MAR 79 (G) 16 Apr 82

P.A. AIR FORCE-99 (G)
Other Cust AIRFORCE-99

TITLE
TEE, TUBE, BULKHEAD, PRECISION TYPE

MILITARY STANDARD
MS 24395

PROCUREMENT SPECIFICATION MIL-F-5509

SUPERSEDES: ~~AN834~~ (G)

SHEET 1 OF 2

DD FORM 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F276

User activities:
Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

This Military Standard is approved for use by HQ AFLC/CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL: STEEL; ALUMINUM ALLOY; CORROSION RESISTANT STEEL (CRES); TITANIUM ALLOY; BARS, SHAPES, OR FORGINGS (SEE PROCUREMENT SPECIFICATION).
FINISH: SEE PROCUREMENT SPECIFICATION.
NO CODE LETTER IN PART NUMBER FOR STEEL.
ADD W IN PLACE OF DASH FOR 7075-T73 ALUMINUM ALLOY.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (EXCEPT 7075-T73).
ADD J IN PLACE OF DASH FOR CRES, TYPE 304.
ADD K IN PLACE OF DASH FOR CRES, TYPE 316.
ADD S IN PLACE OF DASH FOR CRES, TYPE 347.
ADD T IN PLACE OF DASH FOR TITANIUM ALLOY.
TITANIUM IS NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.
EXAMPLE OF PART NUMBERS:
MS24395-8 - TEE, 1/2 TUBING, STEEL.
MS24395D8 - TEE, 1/2 TUBING, ALUMINUM ALLOY (EXCEPT 7075-T73).
MS24395J8 - TEE, 1/2 TUBING, CRES, TYPE 304.
MS24395K8 - TEE, 1/2 TUBING, CRES, TYPE 316.
MS24395S8 - TEE, 1/2 TUBING, CRES, TYPE 347.
MS24395T8 - TEE, 1/2 TUBING, TITANIUM ALLOY.
MS24395W8 - TEE, 1/2 TUBING, 7075-T73 ALUMINUM ALLOY.
USE WASHER CONFORMING TO AN960 TO FORM BACKING FACE WHEN INSTALLED AGAINST BULKHEAD.
BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: FRACTIONS ±1/64.
IN ADDITION TO THE SAMPLING REQUIREMENTS OF THE PROCUREMENT SPECIFICATION, THE SURFACE OF THE CONE ENDS ON 100% OF THE TEES OF A LOT SHALL BE INSPECTED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 14 FEB 97 REVISED (6) FOR CHANGES SEE PAGES 1 & 2. 16 Apr 82

User activities:
Review activities: ARMY - ME, AV
NAVY - AS
DSC - CS

This Military Standard is approved for use by HQ AFLC CASO/LODS, Federal Center, Battle Creek, MI 49016, Department of the Air Force, and is available for use by all Departments and agencies of the Department of Defense.

P.A. AIR FORCE-99 (6) Other Cost AIR FORCE-99	TITLE TEE, TUBE, BULKHEAD, PRECISION TYPE	MILITARY STANDARD MS 24395
PROCUREMENT SPECIFICATION MIL-F-5509	SUPERSEDES: ~~AN834~~ (6)	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 Limited Coordination

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

4730-F276

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.