FED. SUP CLASS
5920

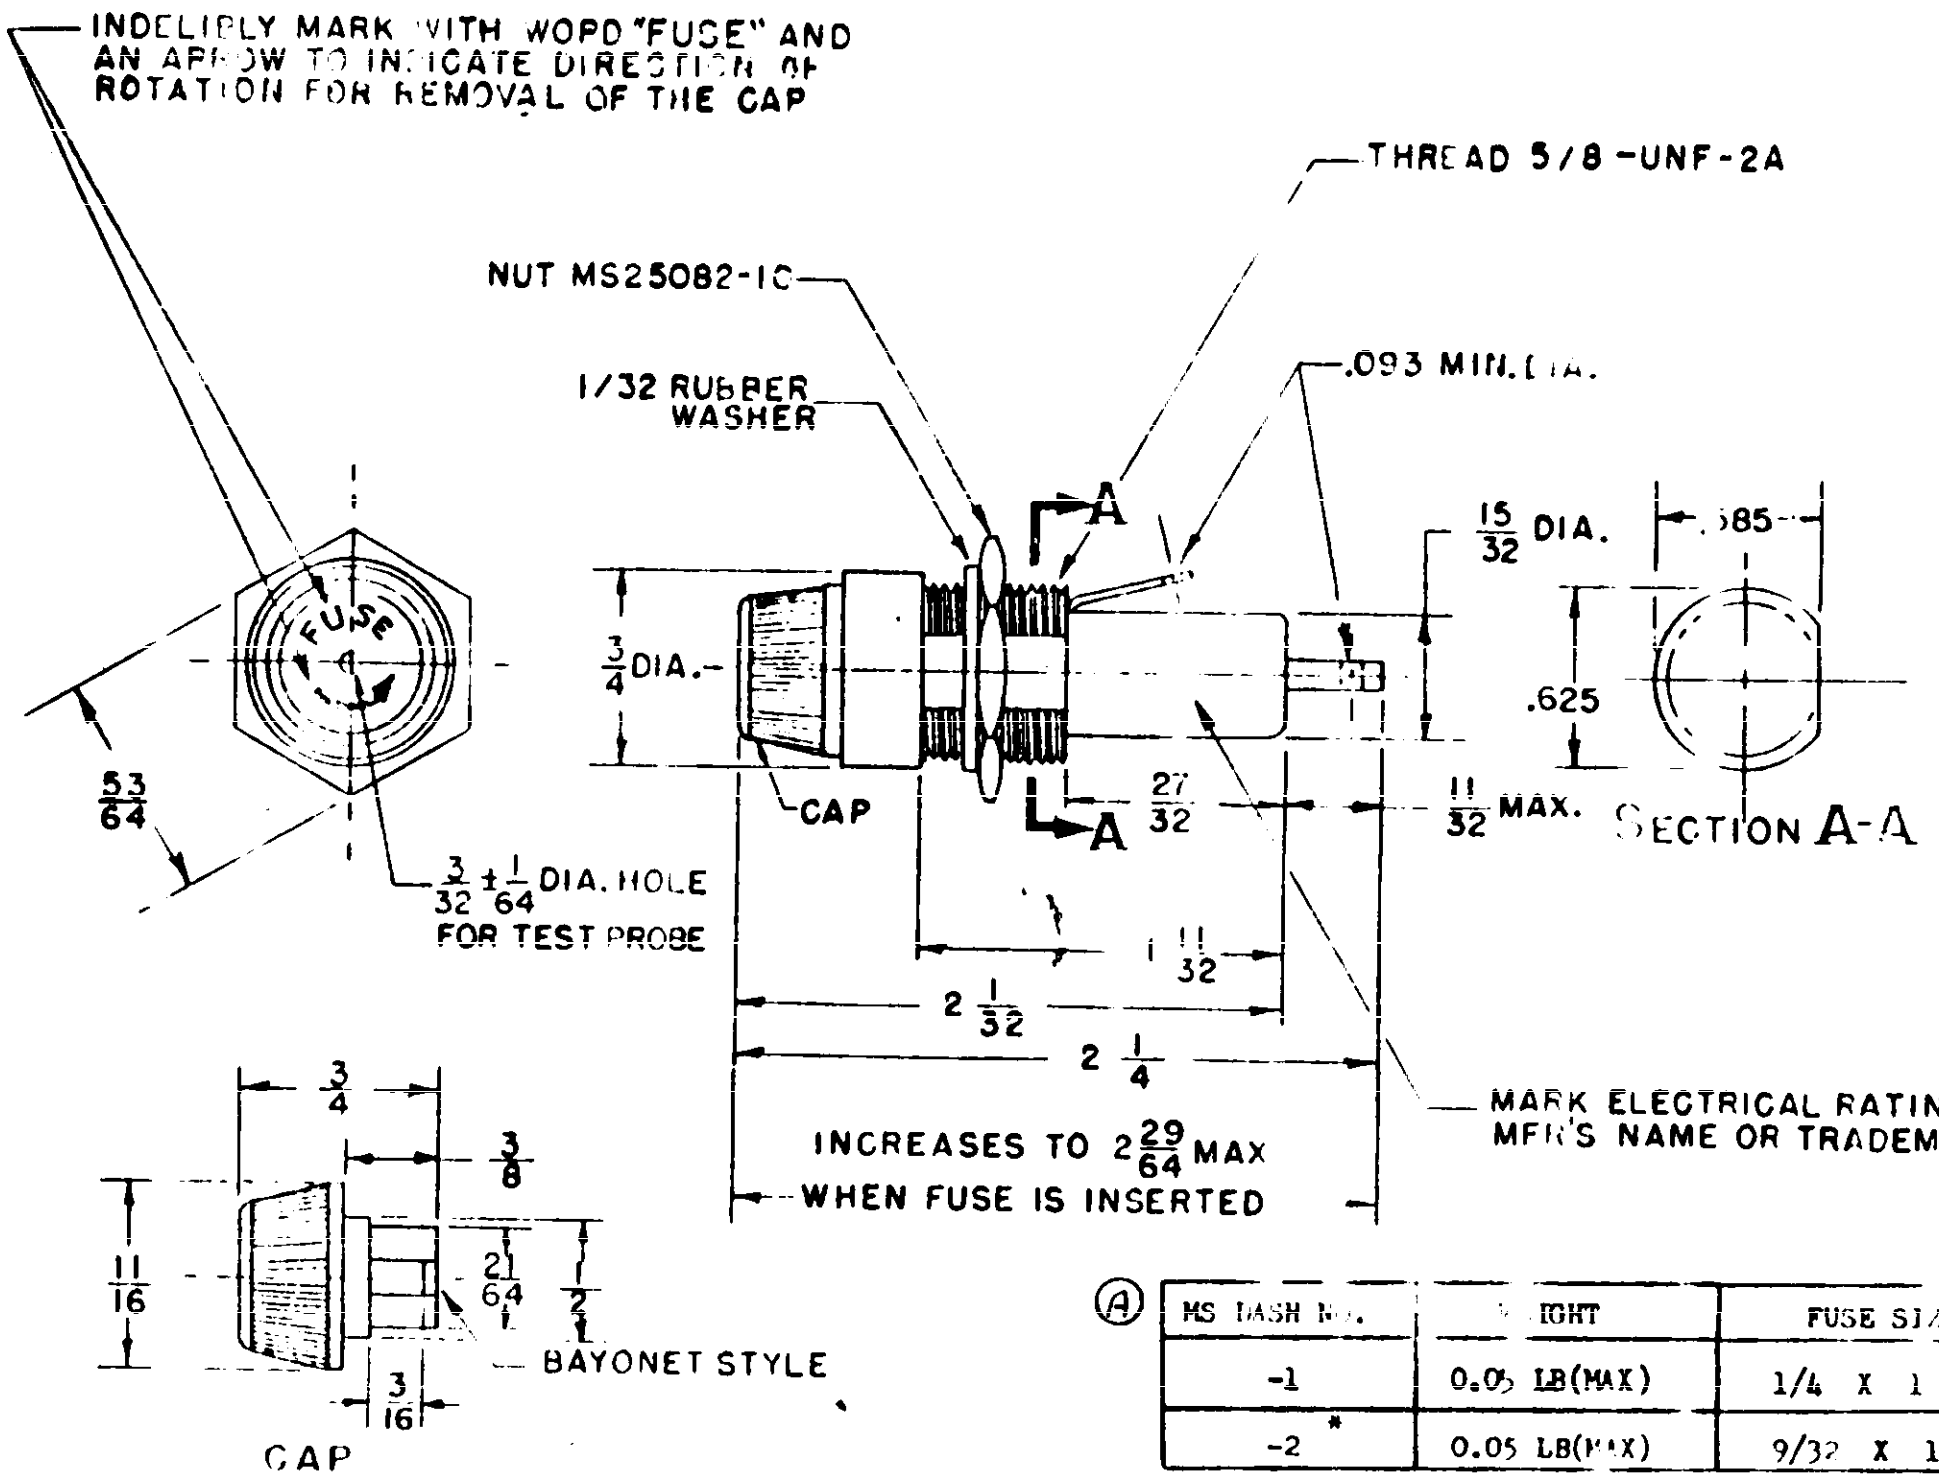

Ⓐ

MS DASH NO.	WEIGHT	FUSE SIZE
-1	0.05 LB(MAX)	1/4 X 1 1/4
-2 *	0.05 LB(MAX)	9/32 X 1 1/4

* INACTIVE FOR NEW DESIGN

NOTES AND SPECIFICATIONS

MATERIALS: - CONTACTS: BRASS OR BERYLIUM COPPER; TERMINALS: BRASS OR PHOSPHOR BRONZE; BODY & CAP: MOLDED PLASTIC.
FINISH : - ELECTRICAL CONTACTS: BRIGHT ALLOY PLATED; TERMINALS: HOT SOLDER DIPPED.
ELECTRICAL RATING: - CURRENT: 0-15 AMP; VOLTS: 0-250; FUSES PER MIL-F-15160.

FUSEHOLDER MUST MEET THE FOLLOWING SPECIFICATIONS: (1) VOLTAGE DROP: 20 MV(MAX) WITH 15 AMPERES WHILE BEING SUBJECTED TO VIBRATION PER PROCEDURE I OF MIL-E-5272. (2) DIELECTRIC: 1250 VOLTS (RMS) 60 CYCLES FOR 1 MINUTE BETWEEN TERMINALS AND BETWEEN TERMINALS AND MOUNTING PANEL. (3) SALT SPRAY: 100 HOURS PER MIL-E-5272. (4) DRIP PROOF: AS SPECIFIED IN MIL-STD-108. (5) TORQUE: METAL INSERT IN CAP - 36 POUND-INCHES WITH NO LOOSENING. (6) MOUNTING: SINGLE HOLE, 5/8 DIAMETER, FOR PANELS UP TO 5/16 THICK. (7) SCREW THREADS: PER NBS HANDBOOK H-28, SEC IV. (8) SPACING BETWEEN RESPECTIVE CONTACTS MEASURED LONGITUDINALLY ALONG THE INTERIOR WALL - 13/32 (MIN). (9) CONSTRUCTION DETAILS OPTIONAL EXCEPT THAT ALL CAPS MUST BE COMPLETELY INTERCHANGEABLE ON ANY FUSEHOLDER.

(ALL ABOVE TESTS TO BE PERFORMED ON A SINGLE FUSEHOLDER)

Ⓐ CAP MUST RETAIN FUSE WHEN REMOVED FROM HOLDER.

Ⓐ

DIMENSIONS IN INCHES. TOLERANCES - UNLESS OTHERWISE SPECIFIED - DECIMALS: ± 0.004, FRACTIONS: ± 1/32.

* USE A DUMMY FUSE IN PERFORMING THIS TEST.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by that activity. All other military activities are requested to employ this standard where suitable.

APPROVED 30 Nov 1960 REVISED Ⓐ 15 Aug 1962

P.A. NAVY-BUWEPS Other Cust	TITLE FUSEHOLDER – CARTRIDGE, EXTRACTOR POST Ⓐ	MILITARY STANDARD MS26572 (WEP)
PROCUREMENT SPECIFICATION MIL-F-19207	SUPERSEDES: NAF STD 1357	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/5020

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T15:13Z
Check the source to verify that this is the current version before use.