DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REVIEWED 80 ,84

| FED. SUP CLASS |
|---|
| 8135 |

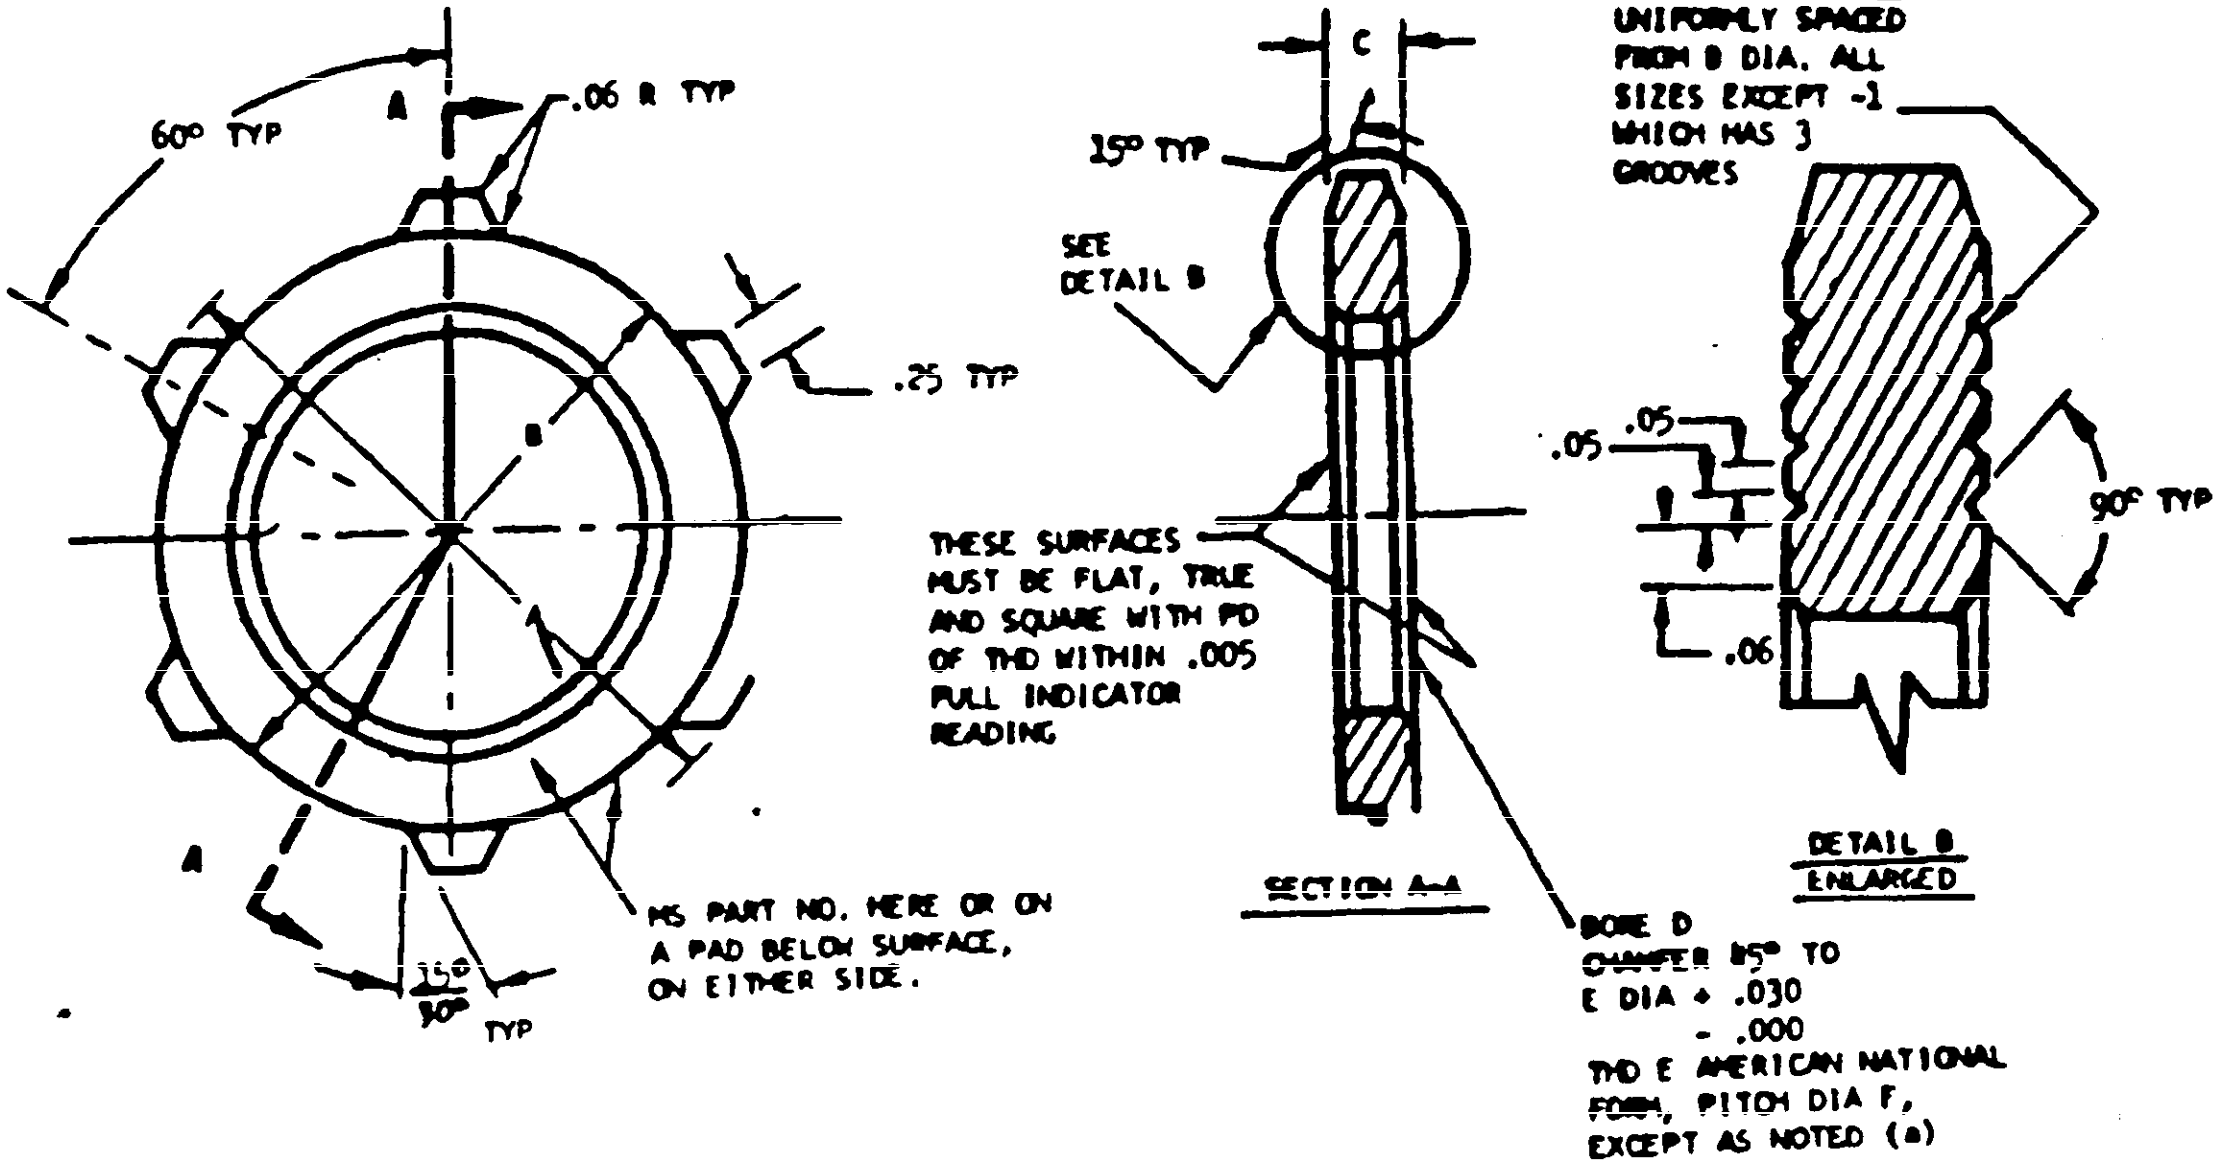

60° TYP
A
.06 R TYP
.25 TYP
B
A
15° 30° TYP
MS PART NO. HERE OR ON A PAD BELOW SURFACE, ON EITHER SIDE.
C
15° TYP
SEE DETAIL B
THESE SURFACES MUST BE FLAT, TRUE AND SQUARE WITH PD OF THD WITHIN .005 FULL INDICATOR READING
SECTION A-A
4 GROOVES UNIFORMLY SPACED FROM B DIA. ALL SIZES EXCEPT -1 WHICH HAS 3 GROOVES
.05
.05
.06
90° TYP
DETAIL B ENLARGED
BORE D
CHAMFER 45° TO E DIA + .030 - .000
THD E AMERICAN NATIONAL FORM, PITCH DIA F, EXCEPT AS NOTED (a)

| MS PART NO. | (b) APPLICABLE TO SHAFT NO. | A DIA | B DIA | C | D DIA | E THREAD DIA. | F PITCH DIA. |
|---|---|---|---|---|---|---|---|
| MS 27422 -1 | -7 1/2 | 2.50 | 2.12 | .31 | | (a) 1-3/8-12 UNF-3B | |
| MS27422 -2 | -10 | 3.00 | 2.62 | .31 | 1.5973 + .0090<br>- .0000 | 1-11/16-12 NS-2 | 1.6334 + .0077<br>- .0000 |
| MS27422 -3 | -20 | 3.38 | 3.00 | .31 | 1.9723 + .0040<br>- .0000 | 2-1/16-12 NS-2 | 2.0084 + .0083<br>- .0000 |
| MS27422 -4 | -30 | 3.62 | 3.25 | .31 | 2.2223 + .0090<br>- .0000 | 2-5/16-12 NS-2 | 2.2584 + .0083<br>- .0000 |
| MS27422 -5 | -40 | 4.12 | 3.75 | .31 | 2.7223 + .0090<br>- .0000 | 2-13/16-12 NS-2 | 2.7584 + .0083<br>- .0000 |
| MS27422 -6 | -50 | 4.81 | 4.44 | .31 | 3.3473 + .0090<br>- .0000 | 3-7/16-12 NS-2 | 3.3834 + .0089<br>- .0000 |
| MS27422 -7 | -60 | 5.56 | 5.19 | .50 | | (a) 4-1/4-8N-3B | |
| MS27422 -8 | -70 | 6.50 | 6.12 | .50 | 4.9897 + .0148<br>- .0000 | 5-1/8-8 NS-2 | 5.0438 + .0140<br>- .0000 |
| MS27422 -9 | -80 | 7.38 | 7.00 | .50 | | (a) 6-8N-3B | |
| | | | | | | | |

(a) THREADS IN ACCORDANCE WITH SPECIFICATION MIL-S-7742

(b) FOR PROPELLER SHAFT SIZE SEE AND 10152

NOTES:

1. MATERIAL: ALUMINUM ALLOY; SPECIFICATION QQ-A-591, AL 13.
   MAGNESIUM ALLOY; SPECIFICATION QQ-M-38
   ZINC-BASE ALLOY; SPECIFICATION QQ-Z-363
   MOLDED PLASTIC, PHENOL-FORMALDEHYDE RESIN; SPECIFICATION L-P-1125
   CELLULOSE ACETATE BUTYRATE; SPECIFICATION L-P-349, MS FLOW

2. FINISH: ALUMINUM ALLOY, ANODIZE; SPECIFICATION MIL-A-8625
   MAGNESIUM ALLOY; SPECIFICATION MIL-M-3171, TYPE III OR IV, AS APPLICABLE

3. REMOVE ALL BURRS AND SHARP EDGES.

4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED
   TOLERANCES: DECIMALS ± .02, ANGLES ± 2°

5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION OF BID.

6. INTERCHANGEABILITY RELATIONSHIP - PARTS MS 27422 -1 THRU -9 ARE UNIVERSALLY, FUNCTIONALLY, AND DIMENSIONALLY INTERCHANGEABLE WITH AN 5023-7 1/2 THRU -80 RESPECTIVELY.

7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

Ⓑ CANCELLED - No superseding standard.

APPROVED 23 FEB 66 REVISED Ⓐ 13 JAN 72 Ⓑ 21 OCT 86

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. AIR FORCE: 69<br>Other Cust NAVY: AS | TITLE<br>NUT-PROPELLER SHAFT THREAD, SHIPPING | MILITARY STANDARD<br>MS 27422 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES:<br>AN 5023 | SHEET 1 OF 1 |

DD FORM 672-1 (Coordinated)

Atch 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:24Z
Check the source to verify that this is the current version before use.