
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - OS; Navy - ; Air Force -

Review activities: Army - AR, MI; Navy - EC, MC, OS; Air Force - 11, 15, 17, 99; DLA-ES

FED. SUP CLASS 5935

APPROVED 14 Nov 1972 — REVISED (A) 7 Sep 1973 (B) 2 Jan 1976 (C) 10 NOVEMBER 1978 (D) 6 FEB 85

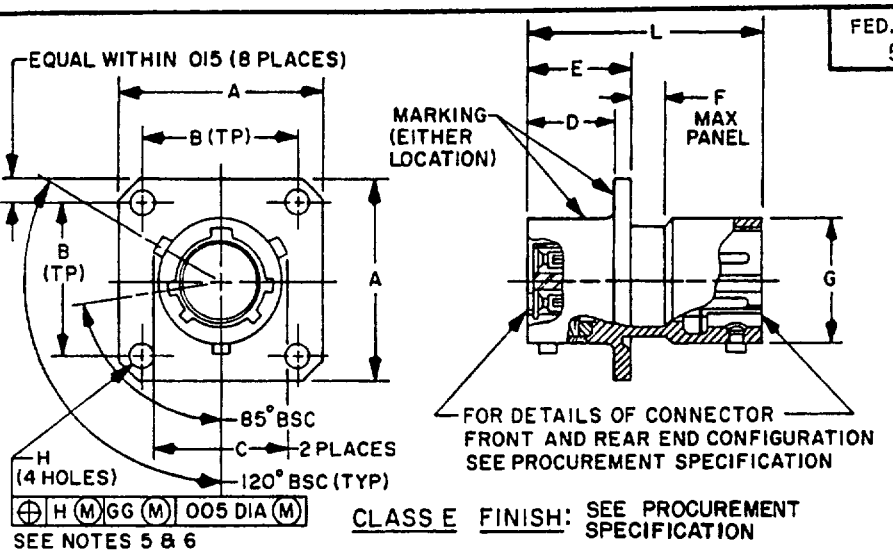

CLASS E FINISH: SEE PROCUREMENT SPECIFICATION

(D)

TABLE I.

Shell size	A ± 020	B (TP)	C + 000 - 016	D + 000 -.005	E +.006 - 001	F MAX 1/	G + 001 - 005	H + 010 -.005	L MAX
9	938	.719	662	↑	↑	↑	.572	↑	↑
11	1.031	.812	810				700		
13	1.125	906	960				850		
15	1.219	.969	1 085	632			975	.128	
17	1.312	1 062	1 210		.717	125	1 100		1.614
19	1.438	1.156	1 317	↓			1.207	↓	
21	1.562	1 250	1 442	602			1.332	.128	
23	1 688	1.375	1.567	602			1 457	147	
25	1.812	1.500	1.692	602	↓	↓	1 582	147	↓

1/ F dimension excludes mounting hardware.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
001	.03	602	15 29	938	23.83	1.207	30 66	1 457	37 01
.005	13	.632	16 05	960	24.83	1.210	30.73	1 500	38.10
.006	.15	.662	16.81	969	24.61	1 219	30 96	1 559	39.60
010	.25	.700	17.78	975	24.76	1.250	31.75	1 562	39.67
.011	28	.717	18 21	1.031	26 19	1.312	33 32	1.567	39.80
016	41	.719	18.26	1.062	26.97	1 317	33 45	1.582	40 18
.125	3 18	.810	20.57	1.085	27 56	1.332	33 83	1.614	41.00
128	3.25	.812	20.62	1 100	27 94	1 375	34 92	1 688	42.88
147	3 73	.850	21 59	1 125	28 58	1 438	36.53	1 692	42 98
572	14.53	.906	23.01	1.156	29.36	1 442	36.63	1.812	46.02

For changes see pages 1 & 2

PA AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, THRU-BULKHEAD MOUNTING, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27662
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:48Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

User activities: Army - OS; Navy - ; Air Force -

Review activities: Army - AR, MI; Navy - EC, MC, OS; Air Force - 11, 15, 17, 99; DLA-ES

FED SUP CLASS
5935


REQUIREMENTS In addition to the requirements of MIL-C-38999, the connector shall meet the following requirements

1. Contact resistance shall be 125 percent of that specified in table V of MIL-C-39029
2. Connectors shall show no leakage in excess of one atmospheric cubic inch of air per hour (4 55 X 10^{-3} cm^3/s) when subjected to a pressure differential of one atmosphere across the connector as specified in MIL-C-27599 for class T

TABLE II Operating voltage

Service ratings	Operating voltage (sea level)	
	AC(rms)	DC
M	400	550
I	600	850
II	900	1250

EXAMPLE OF PART NUMBER

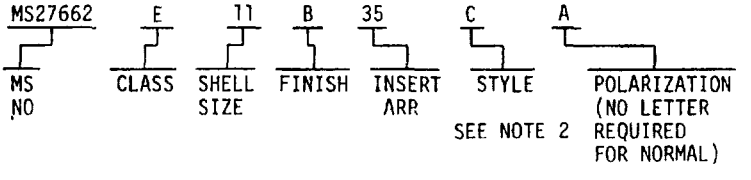

NOTES.
1. Dimensions are in inches.
2. In example of part number, style C indicates feed through contacts.
3. This standard takes precedence over procurement documents referenced herein.
4. Referenced documents shall be of the issue in effect on date of invitation for bid.
5. The gage feature for GG shall be .010 smaller than the MMC size at basic location.
6. For main key and keyway positions, see MIL-C-38999.
(D) 7. Metric equivalents are given for general information only.
8. For insert arrangements see MIL-STD-1560.
9. Operating voltages are listed in table II for guidance.

APPROVED 14 Nov 1972 REVISED (D) For changes see pages 1 & 2

PA AF - 85 Other Cust Army - CR Navy - AS	International interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, THRU-BULKHEAD MOUNTING, BAYONET COUPLING, SERIES I	MILITARY STANDARD MS27662
Procurement Specification MIL-C-38999		SUPERSEDES	PAGE 2 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-3451

Source: https://assist.dla.mil -- Downloaded: 202640-23T16:48Z
Check the source to verify that this is the current version before use.