
lity, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

(A) FED. SUP CLASS. 5935

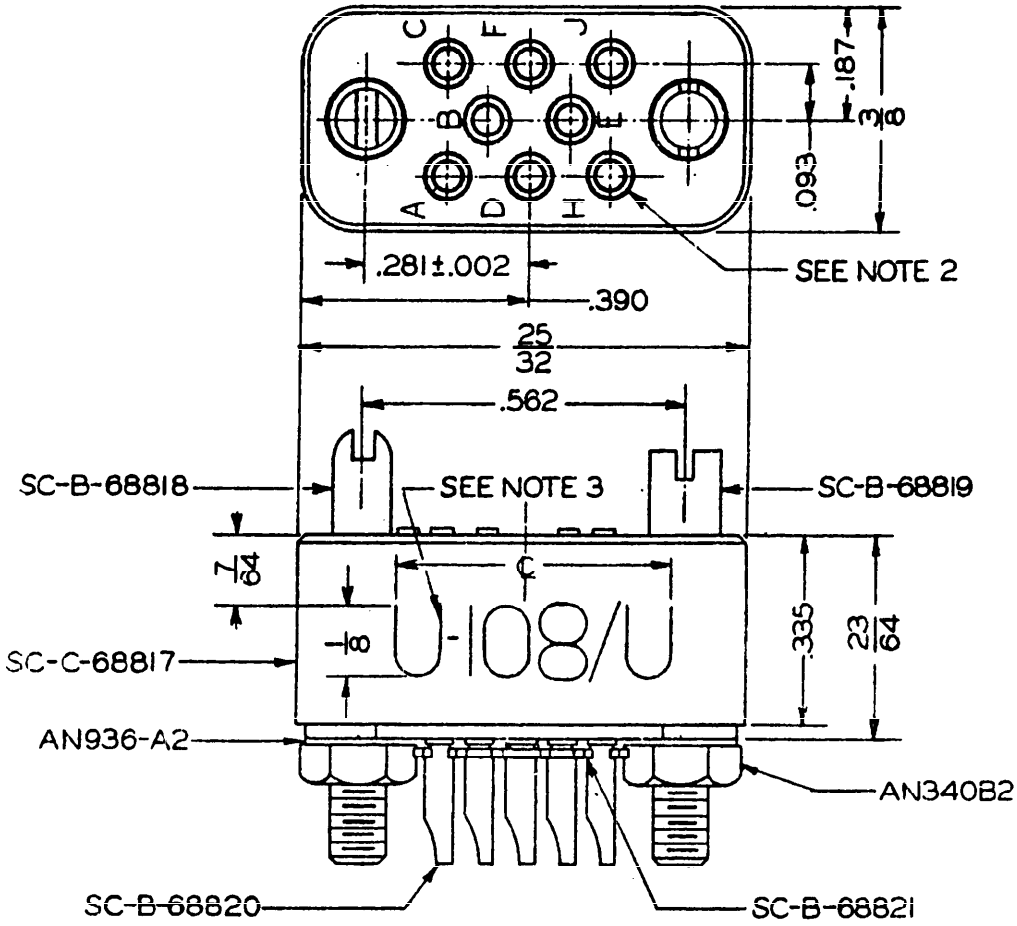

REQD	DESCRIPTION	MATERIAL	SIGNAL CORPS DRAWING NO.	REQD	DESCRIPTION	MATERIAL	SIG C/AN DRAWING NO.
1	HOUSING	PLASTIC	SC-C-68817	8	RING LOCK	BRASS	SC-B-68821
1	PIN GUIDE	BRASS	SC-B-68818	2	LOCKWASHER	STEEL	AN935-A2
1	SLEEVE GUIDE	BRASS	SC-B-68819	2	NUT	BRASS	AN340B2
8	SOCKET CONTACT	BRASS	SC-B-68820				

NOTES:

1. TOLERANCES ON DIMENSIONS, WHERE NOT OTHERWISE SHOWN, SHALL BE HELD TO ±.005 ON DECIMALS, ±1/64 ON FRACTIONS.
2. CONTACT PINS MAY BE OF THE MOLDED-IN TYPE.
3. METAL STAMP OR ETCH CHARACTERS SO AS TO MEET THE APPLICABLE REQUIREMENTS OF U. S. ARMY SPECIFICATION 71-4944.
4. THE INSULATOR SHALL HAVE NO CRACKS OR VISIBLE FLAWS.
5. ALL METAL PARTS SHALL BE FREE FROM CHIPS, BURRS, AND SCRATCHES, IN ACCORDANCE WITH GOOD COMMERCIAL PRACTICE.
6. ALL SCREW THREADS SHALL BE PER NATIONAL BUREAU OF STANDARDS PUBLICATION H-28.
7. THIS MS35137 AND DRAWINGS, SPECIFICATIONS, PUBLICATIONS, AND OTHER REFERENCED SUBSIDIARIES, IF ANY, CONSTITUTE ALL THE NECESSARY DATA RELATING TO THIS STANDARD.

ALL DIMENSIONS IN INCHES

(A)

DASH NO.	FIIN
-1	

APPROVED 12 JUNE 1953 REVISED (A2) 26 MAY 1954

CUSTODIAN	MILITARY STANDARD	MS 35137 (SIG C)
SIGNAL CORPS	RECEPTACLE, CONNECTOR	
PROCUREMENT SPECIFICATION	U-108/U	SHEET

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:10Z
Check the source to verify that this is the current version before use.