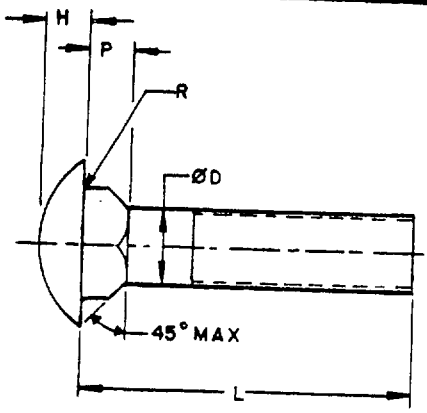
FED. SUP CLASS
5306



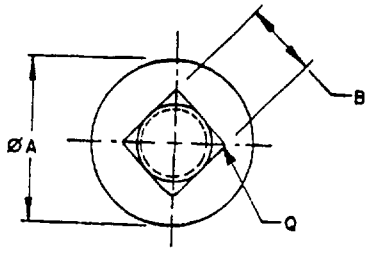


TABLE I. DASH NUMBERS AND DIMENSIONS.

NOMINAL SIZE			.190	.250	.3125	.375	.4375	.500	.625	.750
THREADS PER INCH			24 UNC-2A	20 UNC-2A	18 UNC-2A	16 UNC-2A	14 UNC-2A	13 UNC-2A	11 UNC-2A	10 UNC-2A
ØD BODY		MAX	.199	.260	.324	.388	.452	.515	.642	.768
		MIN	.182	.237	.298	.360	.421	.483	.605	.729
ØA HEAD		MAX	.469	.594	.719	.844	.969	1.094	1.344	1.594
		MIN	.438	.563	.688	.782	.907	1.032	1.219	1.469
B SQUARE WIDTH		MAX	.199	.260	.324	.388	.452	.515	.642	.768
		MIN	.185	.245	.307	.368	.431	.492	.616	.741
H HEAD HEIGHT		MAX	.114	.145	.176	.208	.239	.270	.344	.406
		MIN	.094	.125	.156	.188	.219	.250	.313	.375
P SQUARE DEPTH		MAX	.125	.156	.187	.219	.250	.281	.344	.406
		MIN	.094	.125	.156	.188	.219	.250	.313	.375
Q CORNER RADIUS		MAX	.031	.031	.031	.047	.047	.047	.078	.078
R FILLET RADIUS		MAX	.031	.031	.031	.031	.031	.031	.062	.062
L LENGTH	TOLERANCE SIZE .190 THRU .375	SIZE .4375 AND .500	SIZE .625 AND .750	DASH NO	DASH NO	DASH NO	DASH NO	DASH NO 1/	DASH NO	DASH NO	DASH NO
.750	+.02	+.02	+.02	1	15	40	68				
.875	-.03	-.03	-.01	211							
1.000				2	16	41	69	97	123		
1.250											
1.500				3	17	42	70	98	124		
1.750	+.02	+.04	+.06	4	18	43	71	99	125	152	
2.000	-.04	-.06	-.08	5	19	44	72	100	126	153	
2.250				6	20	45	73	101	127	154	181
2.500				7	21	46	74	102	128		182
				8	22	47	75	103	129	156	183
2.750											
3.000				9	23	48	76	104	130	157	
3.250	+.04	+.06	+.08	10	24	49	77	105	131	158	185
3.500	-.06	-.08	-.10	11	25	50	78	106	132	159	
3.750				12	26	51	79	107	133	160	187
4.000				13	27	52	80	108	134		
				14	28	53	81	109	135	162	189
4.250					202	213	205	207	209		
4.500					29	54	82	110	136	163	190
4.750	+.06	+.08	±.10		203	204	206	208	210		
5.000	-.10	-.10			30	55	83	111	137	164	191
5.500					31	56	84	112	138	165	192
6.000					32	57	85	113	139	166	193
6.500											
7.000					33	58	86	114	140	167	194
7.500					34	59	87	115	141	168	195
8.000					35	60	88	116	142	169	196
8.500					36	61	89	117	143	170	197
							90		144		198
9.000	+.10	+.12	+.14		212	63	91	119	145	172	199
9.500	-.18	-.18	-.18			64	92		146		
10.000						65	93	121	147	174	201
11.000							94		148	175	
11.500						214					
12.000						215	95		149	176	
13.000						216	217				
16.000							218				

1/ DASH NUMBERS 97 THRU 121, 207 AND 208 ARE INACTIVE FOR NEW DESIGN

Ⓓ ENTIRE STANDARD REVISED

APPROVED 30 OCT 56 REVISED Ⓓ 4 NOV 85

USER ACTIVITIES:
ARMY-AT,ME
NAVY-MC,OS,YD

CIVIL AGENCY COORDINATING ACTIVITIES
GSA-FSS
NASA-JFK

REVIEWER ACTIVITIES:
ARMY-AV,EA
AIR FORCE-82
DLA-IS
NSA-NS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AR Other Cust AIR FORCE-99		BOLT, SQUARE NECK, ROUND HEAD (CARRIAGE), STEEL, CADMIUM OR ZINC PLATED, UNC-2A	MS 35751
PROCUREMENT SPECIFICATION ANSI B18.5	SUPERSEDES: BADX SERIES		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED)

5306-0926

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5306

REQUIREMENTS:

1. MATERIAL: CARBON STEEL, IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION OR GRADE A IN ACCORDANCE WITH ASTM A307 OR GRADE 1 IN ACCORDANCE WITH SAE J429. THE MINIMUM ULTIMATE TENSILE STRENGTH SHALL BE 60,000 PSI.

2. PROTECTIVE COATING AND SURFACE TREATMENT: CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3 OR MIL-C-81562, TYPE II, CLASS 3 OR ZINC COATED IN ACCORDANCE WITH ASTM B633 OR MIL-C-81562, TYPE II, CLASS 3.

3. THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2.

4. THREAD LENGTH: MINIMUM FULL FORM THREAD LENGTH SHALL BE TWICE THE NOMINAL SIZE PLUS .25 INCH FOR BOLT LENGTHS OF 6 INCH AND SHORTER, AND TWICE THE NOMINAL SIZE PLUS .50 INCH FOR LONGER LENGTHS. BOLTS TOO SHORT FOR MINIMUM THREAD LENGTH SHALL HAVE FULL FORM THREADS EXTENDING AS CLOSE TO THE NECK AS PRACTICABLE, AND SHALL BE WITHIN 2-1/2 PITCHES FROM THE NECK.

5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS35751-1
- -1 — DASH NUMBER
- MS35751 — BASIC MS NUMBER

MS35751-1 INDICATES - BOLT, SQUARE NECK, ROUND HEAD (CARRAIGE), STEEL, CADMIUM OR ZINC PLATED, UNC-2A; NOMINAL SIZE .190-24 UNC-2A; LENGTH .75.

6. QUALITY ASSURANCE PROVISIONS: QUALITY ASSURANCE PROVISIONS SHALL BE IN ACCORDANCE WITH ANSI B18.18.1M. THREAD ACCEPTABILITY SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21, AND ANSI B18.18.1M, INSPECTION LEVEL B.

7. PACKAGING: PACKAGING SHALL BE IN ACCORDANCE WITH ASTM D3951.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 30 OCT 56 REVISED Ⓓ FOR CHANGES SEE PAGE 1 AND 2

USER ACTIVITIES: ARMY-AT, ME; NAVY-MC, OS, YD

CIVIL AGENCY COORDINATING ACTIVITIES: GSA-FSS; NASA-JFK

REVIEWER ACTIVITIES: ARMY-AV, EA; AIR FORCE-82; DLA-IS; NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Sales limit for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. ARMY-AR Other Cust AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: BOLT, SQUARE NECK, ROUND HEAD (CARRIAGE), STEEL, CADMIUM OR ZINC PLATED, UNC-2A	MILITARY STANDARD MS 35751
PROCUREMENT SPECIFICATION ANSI B18.5	SUPERSEDES: BADX SERIES		PAGE 2 OF 2

DD FORM 672-1 COORDINATED

5306-0926

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.