


FED. SUP CLASS
2350

REVIEW ACTIVITY: ARMY – WC, MU, EL

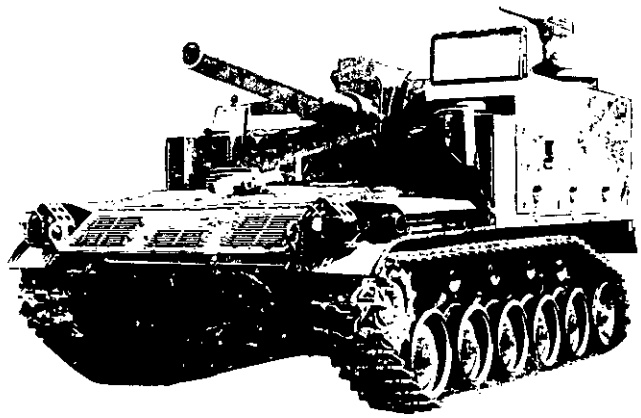

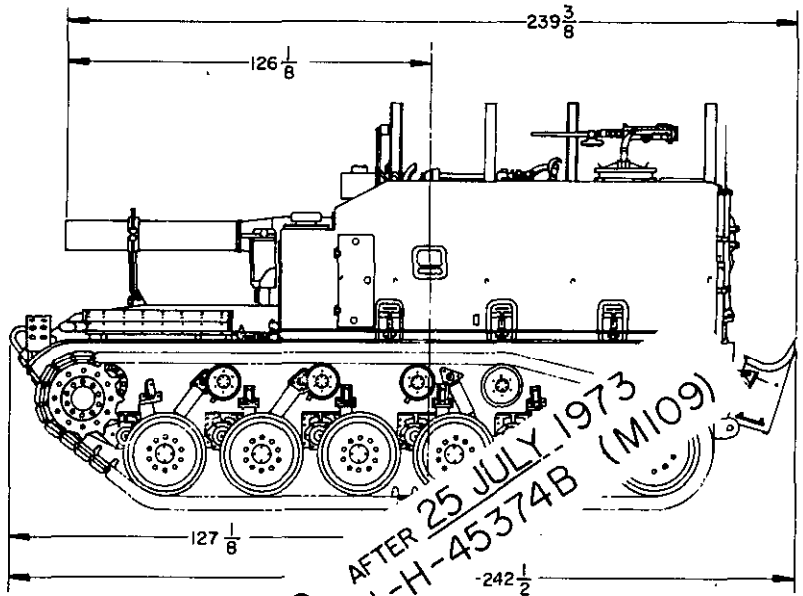

CANCELLED AFTER 25 JULY 1973
SUPERSEDED BY MIL-H-45374B (M109)

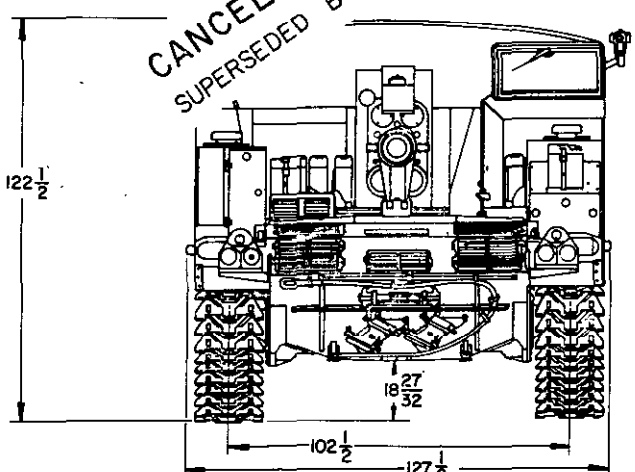

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

MS PART NO	DRAWING NO
MS 51986-1	F 8736129

APPROVED 7 MAY 1964 REVISED (A) 25 JULY 1973

P.A. MO (ATAC)	INTERNATIONAL AGREEMENT	TITLE
Other Cust		HOWITZER, MEDIUM, SELF PROPELLED 155 MM, M44A1
PROCUREMENT SPECIFICATION: MIL-H-45304 (ORD)		SUPERSEDES:

MILITARY STANDARD
MS 51986 (MO)
SHEET 1 OF 2

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2350

VEHICLE CHARACTERISTICS

REVIEW ACTIVITY: ARMY—WC, MU, EL

GENERAL

WEIGHT (COMBAT LOADED) APPROX. 62,500 LBS.
CREW 5
WEIGHT (LESS CREW, STOWAGE AND FUEL) 58,000 LBS.
CENTER OF GRAVITY 47 9/16 IN. ABOVE GROUND
98 1/16 IN. FROM CENTERLINE OF SPROCKET
UNIT GROUND PRESSURE 9.4 LBS/SQ. INCH

ARMOR

VISION AND FIRE CONTROL EQUIPMENT

TELESCOPE, PANORAMIC	TYPE M12A7K	QTY. 1
TELESCOPE, DIRECT FIRE	TYPE M93	QTY. 1
QUADRANT, GUNNERS	TYPE M1A1	QTY. 1
SETTER FUZE	TYPE M26	QTY. 1
SETTER FUZE	TYPE M27	QTY. 1

ARMAMENT, PRIMARY

HOWITZER, 155 MM, M45 MOUNT, M80
RECOIL MECHANISM TYPE: HYDRO-SPRING
TRAVERSE: RIGHT 30° LEFT 30° RATE 10° PER SEC.
POWER TYPE: HYDRAULIC MANUAL TYPE: GEAR & PINION
ELEVATION: +65° DEPRESSION: -5° RATE: 10° PER SEC.
POWER TYPE: HYDRAULIC MANUAL TYPE: GEAR & PINION

ARMAMENT, SECONDARY

GUN, MACHINE, CAL. .50, M2, A.A. (1) RING MOUNT
TRAVERSE, 360° ELEVATION +52° DEPRESSION -21°
GUN, SUB-MACHINE, CAL. .45, M3A1 (1)
CARBINE, CAL. .30, M2 (4)

AMMUNITION

24 RDS. 155 MM
900 RDS. CAL. .50
720 RDS. CAL. .30
180 RDS. CAL. .45
8 GRENADES, HAND

RUNNING GEAR

SUSPENSION TYPE: INDEPENDENT TORSION BAR WITH TRAILING IDLER (28 IN. DIA.)
NO. OF WHEELS: 5 DUALS EACH SIDE, DISK TYPE, WHEEL SIZE 25 1/2 IN.
TIRES: 10 DUALS, TYPE: SOLID RUBBER, 25 1/2 x 4 1/2
TRACK: TYPE T91E3, STEEL, W/DETACH. RUBBER PADS
NO. SHOES/TRACK: 74L, 75R, PITCH, 6 IN. WIDTH 21 IN.

ELECTRICAL SYSTEM

NOMINAL VOLTAGE, 24
GENERATOR, MAIN, 150 AMP., PART NO. 8724633
GENERATOR, AUX., 300 AMP., PART NO. 7402334
BATTERY: (4) TYPE 6TN, 12-V, 100 AMP., MS 35000-4
IGNITION SYSTEM: MAGNETO, MS 51333, COIL, MS 51355-1

POWER PACKAGE

ENGINE

TYPE: 6 CYL. HORIZONTAL OPPOSED, AIR COOLED, FUEL INJECTION, MS 51314-1
DISPLACEMENT, 895 CU. IN., BORE, 5.75 IN STROKE, 5.75 IN.
GOVERNED SPEED, 2800 RPM COMPRESSION RATIO, 5.5:1
FUEL, GASOLINE RATING, 80 OCTANE
BRAKE HORSEPOWER (STANDARD CONDITIONS) 500 @ 2800 RPM
TORQUE (STANDARD CONDITIONS) 945 @ 2000 RPM
MAIN COOLING SYSTEM, AIR, ENGINE DRIVEN INTEGRAL FAN
OIL COOLING SYSTEM, AIR, ENGINE DRIVEN INTEGRAL FAN.

POWER TRAIN

TYPE: GROSS DRIVE TRANSMISSION, PART NO. 7527947
HYDRAULIC CONVERTER, SINGLE STAGE, MULTIPHASE STALL MULTIPLICATION, 4:1
OVERALL USABLE RATIOS: LOW, 14.9, HIGH 3.9 REVERSE 14.9
STEERING CONTROL: HYDRAULIC SERVO, HANDLE BAR STEERING RATE, 6.8 RPM TURNING RADIUS, PIVOTS
BRAKES: MULTIPLE DISK OPERATION: FOOT PEDAL, HYDRO-MECHANICAL
OIL COOLING SYSTEM: AIR, ENGINE DRIVEN INTEGRAL FAN

FINAL REDUCTION

TYPE: SPUR GEAR, RATIO 4.75:1 FT/REV 6
SPROCKET PITCH DIA. 23.422 NO. OF TEETH - 12

COMMUNICATIONS

RADIO SET: AN/PRC, 8.9 OR 10 IN CREW COMPARTMENT
INTERPHONE: MODEL AN/UIC-1, 5 OUTLETS
EXTERNAL INTERPHONE EXT. KIT - MODEL C-980/U

FIRE EXTINGUISHER

FIXED: (2) CO_2 10 # BOTTLES PORTABLE: (1) CO_2, 5# BOTTLE

CAPACITIES

FUEL, TOTAL, 150 GALLONS
CRANKCASE, REFILL, 44 QUARTS
TRANSMISSION, REFILL, 44 QUARTS
FINAL DRIVE, REFILL, 5 QUARTS

PERFORMANCE

GROSS HORSEPOWER TO WEIGHT RATIO, 15.6 HP/TON
MAX. TRACTIVE EFFORT, 53,000 LBS. TE/W 0.83
MAX. SPEED, 40 MPH MAX. GRADE, 60%
MAX. TRENCH, 72 IN. MAX. VERTICAL WALL, 30 IN
MAX. FORDING DEPTH, 42 IN.
CRUISING RANGE, 82 MILES

THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWING NO. 8736129, COPY OF WHICH MAY BE OBTAINED FROM: ARMY TANK AUTOMOTIVE CENTER, DETROIT ARSENAL, WARREN, MICHIGAN ATTN: STANDARDIZATION BRANCH.

APPROVED 7 MAY 1964 REVISED (A) FOR CHANGE SEE SHEET 1

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC-ARMY-STD.98. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED. REFERENCE: STANAG 2822.

P.A. MO (ATAC)	INTERNATIONAL AGREEMENT	TITLE	MILITARY STANDARD
Other Cust		HOWITZER, MEDIUM, SELF PROPELLED 155 MM, M44A1	MS 51986 (MO)
PROCUREMENT SPECIFICATION MIL-H-45304 (ORD)		SUPERSEDES:	SHEET 2

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973 - 713-145/564

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:15Z
Check the source to verify that this is the current version before use.