

FED. SUP CLASS
2350

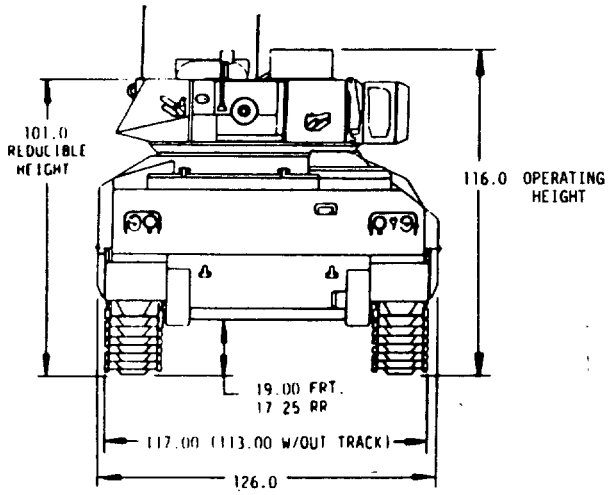

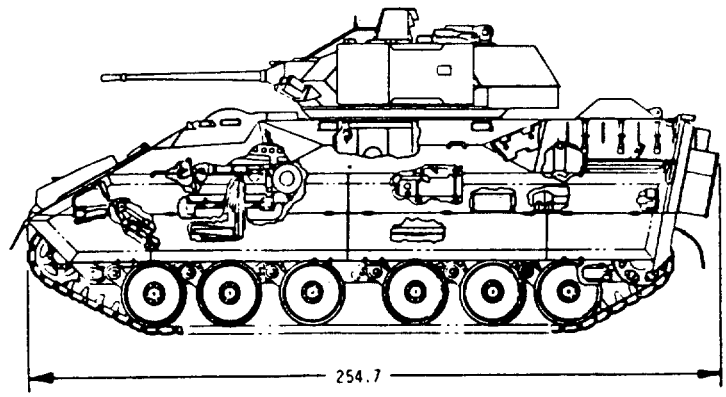

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 20 MAR 1987 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52274	8750135

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		VEHICLE, FIGHTING, CAVALRY M3A1 WITH TOW AND EXTERNALLY POWERED WEAPON	MS52274(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 MAY 71 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 2350-A362

USER ACTIVITIES:

REVIEWER ACTIVITIES

Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23118:242
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army [illegible] Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSCN/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

VEHICLE CHARACTERISTICS

GENERAL:

WEIGHT	
COMBAT	49,200
LESS FUEL, CREW, & STOWAGE	41,421
GROUND PRESSURE COMBAT LOADED	7.5PSI
PERSONNEL CAPACITY	5 MEN
FUEL CAPACITY	175 GAL

ENGINE:

CUMMINGS VTA-903 4 STROKE TURBOCHARGED DIESEL 903 CO IN. V8 500 HP AT 2600 RPM

TRANSMISSION:

GENERAL ELECTRIC HMPT-500
HYDROMECHANICAL AUTOMATIC

PERFORMANCE:

LAND SPEED	
FORWARD	40 TO 45MPH
REVERSE	5 TO 10MPH
CRUISING RANGE	300 MI. MIN
SLOPE	60 %
SIDE SLOPE	40 %
TRENCH CROSSING	100 INCHES
VERTICAL OBSTACLE	36 INCHES
WATER SPEED WITH TRACK	4.5 MPH MIN
FORDING DEPTH	3 TO 4 FEET
TURNING RADIUS	PIVOT TO INFINITE

ARAMENT

TURRET	(2 MAN)
25 MM WEAPON	M-242, AUTOMATICE DUAL FEED, EXTERNAL POWERED

7.62 MM MACHINE GUN
TOW ANTITANK WEAPON DUAL LAUNCHER

AMMUNITION:

TOW MISSILES	2 IN LAUNCHER, 10 STOWED
LAW (M72A2)	3 STOWED
25 MM (M240	300 READY, 1200 STOWED
7.62 MM (M240)	660 READY, 3740 STOWED
7.62 MM (M60)	3200 STOWED
5.56MM	1680 STOWED

RADIO AND COMMUNICATIONS:

AN/VRC-46, AN/GRC 160, AN/VRC-47, AN/PRC-77

BASIC LISTS, DRAWINGS, AND SPECIFICATIONS:

VEHICLE SPECIFICATION	A12350500A
PREPARATION FOR DELIVERY	12328552
SPECIAL EQUIPMENT	
SELF-RECOVERY KIT	
WINDSHIELD KIT	12298236
WINTERIZATION KIT	12293243
CLOSURE KIT	
AIR TRANSPORT KIT	
FOR LIST OF DEPOT AND OR TROOP ISSUED EQUIPMENT SEE	ED8750135 ET8750135
COMMON SUPPORT EQUIPMENT LIST	
TRANSPORTABILITY DATA	
SPECIAL TOOLS LIST	
CONFIGURATION ITEM IDENTIFICATION	XM92002G1
DRIVERS NIGHT VIEWER INTERFACE DRAWING	12308639(REF)
BRAKE INSTALLATION	12334474
STEERING SYSTEM INSTALLATION	12307389
GEAR SELECTOR INSTALLATION	12294729
POWER UNIT INSTALLATION	12944819
FUEL SYSTEM INSTALLATION	12294733
PERSONNEL HEATER INSTALLATION	12294735
AMMUNITION STOWAGE INSTALLATION	12334210
IDENTIFICATION PLATE INSTALLATION	12350386
RAMP LOCK INSTALLATION	12293172
SUSPENSION INSTALLATION	12296919
FUEL CELL COVER INSTALLATION	12293038
DRIVER'S SEAT INSTALLATION	12294658
THROTTLE AND FUEL SHUT OFF INSTALLATION	12307390
BILGE PUMPING SYSTEM COMPONENTS AND INSTALLATION	12294724
ENGINE COMPARTMENT STORAGE INSTALLATION	12297745

APPROVED 20 MAR 1987 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52274	8750135

P. A.	INTERNATIONAL INTEREST	TITLE
ARMY-AT Other Cust		VEHICLE, FIGHTING, CAVALRY M3A1 WITH TOW AND EXTERNALLY POWERED WEAPON
PROCUREMENT SPECIFICATION	SUPERSEDES:	

MILITARY STANDARD
MS52274(AT)
SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:24Z
Check the source to verify that this is the current version before use.