FED SUP CLASS
5340

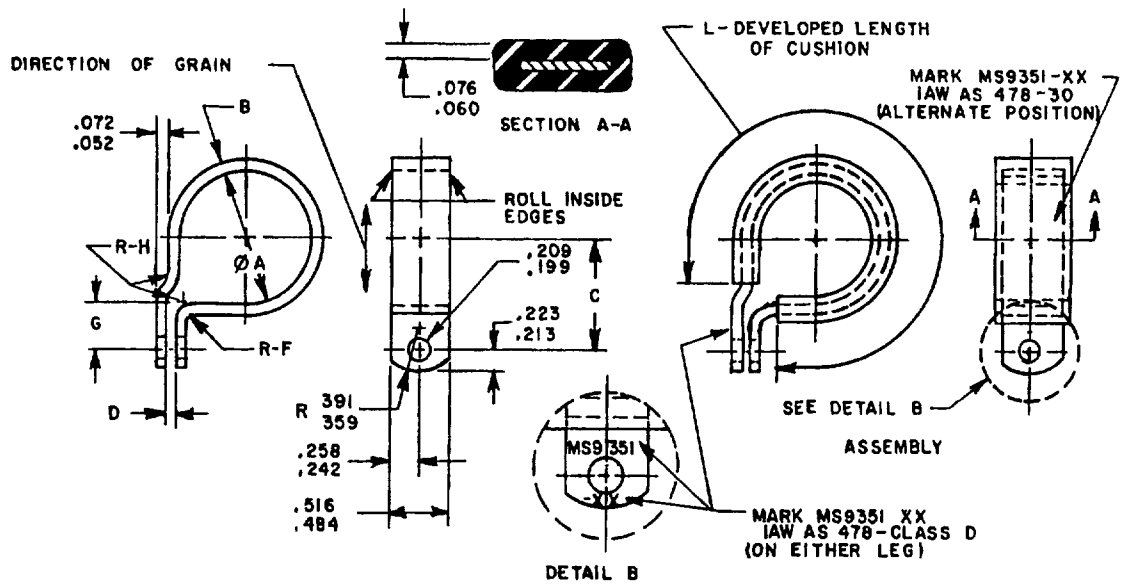


TABLE 1. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	TUBE OUTSIDE DIAMETER NOM	ØA BASIC	B ± 006	C ± 010	D	F RADIUS ± 016	G ± 016	H RADIUS ± 016	L + 040 - 000	APPROX WEIGHT LB/100
-01	125	.250	.031	457	125-.141	.062	.312	.062	679	.56
-02	.188	312	031	498	.125-.141	062	.312	062	.908	70
-03	.250	375	031	529	125-.141	.062	.312	062	1 097	.81
-04	312	.438	031	.560	.125- 141	.062	312	.062	1.306	92
-05	375	.500	031	.592	125- 141	062	.312	.062	1.515	1 03
-06	438	.562	.031	.623	.125-.141	.062	.312	.062	1.724	1.15
-07	.500	625	.031	.654	.125- 141	062	.312	.062	1 930	1.26
-08	562	688	.051	752	125- 141	.109	375	.094	2.092	1 77
-09	.625	750	.051	783	125- 141	109	.375	.094	2 299	1 91
-10	.688	812	.051	814	125-.141	109	.375	.094	2.506	2.05
-11	.750	875	051	.845	.125-.141	109	375	094	2 721	2.20
-12	.812	.938	.051	877	.125-.141	.109	.375	.094	2.929	2.34
-13	.875	1.000	.051	908	.125- 141	.109	.375	094	3.136	2.47
-14	.938	1.062	.051	939	125-.141	.109	.375	.094	3.343	2.61
-15	1 000	1 125	.051	970	.125- 141	109	.375	094	3.555	2.75
-16	1 062	1.188	.051	1.002	.125-.141	.109	.375	.094	3.769	2.90
-17	1 125	1 250	.064	1 062	.156-.172	125	.406	.125	3 914	3.43
-18	1.188	1.312	064	1.093	.156- 172	125	.406	125	4.125	3 58
-19	1.250	1 375	.064	1.125	.156-.172	.125	.406	.125	4 339	3 74
-20	1.312	1 438	.064	1.156	156-.172	.125	.406	.125	4.551	3.90
-21	1.375	1.500	.064	1.188	.156-.172	125	.406	.125	4.754	4.05
-22	1.438	1.562	064	1 219	.156- 172	.125	.406	.125	5.006	4.23
-23	1.500	1.625	064	1 250	156-.172	.125	.406	.125	5.173	4.36
-24	1.562	1.688	064	1.281	.156-.172	.125	.406	.125	5 386	4.52
-25	1.625	1.750	.064	1 312	.156-.188	125	.406	125	5.585	4 67
-26	1.688	1.812	.064	1.344	.156- 188	.125	.406	.125	5.798	4 82
-27	1.750	1 875	064	1.375	.156- 188	.125	.406	.125	6 011	4 98
-28	1.812	1.938	064	1.406	156- 188	.125	.406	.125	6.223	5 14
-29	1.875	2.000	.064	1.438	.156- 188	.125	.406	.125	6 436	5.30
-30	1 938	2.062	.064	1.469	.156-.188	.125	.406	.125	6.643	5.45
-31	2 000	2.125	.064	1.500	.156-.188	.125	.406	.125	6.840	5.60

Ⓑ ENTIRE STANDARD REVISED

APPROVED 14 JAN 65 REVISED Ⓐ 21 FEB 1967 Ⓑ 11 JUN 86

P A NAVY-AS
Other Cust
AIR FORCE-11

INTERNATIONAL INTEREST

TITLE
CLAMP, LOOP, CUSHIONED, JOGGLED, ALUMINUM, .204 HOLE

MILITARY STANDARD
MS9351

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

PAGE 1 OF 2

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1734

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

USER ACTIVITIES.

REVIEWER ACTIVITIES.
DLA-IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS


1. MATERIAL: CLAMP-ALUMINUM IN ACCORDANCE WITH AMS 4041-79
   CUSHION-RUBBER IN ACCORDANCE WITH AMS 3209.

2. CLAMP FORM: CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIAMETER OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN +.001 HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION, CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.

3. EDGES: REMOVE BURRS AND SHARP EDGES

4 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9351-01



MS9351-01 INDICATES - CLAMP, LOOP, CUSHIONED, JOGGLED, ALUMINUM, .204 HOLE, TUBE OUTSIDE DIAMETER NOMINAL .125; BASE DIAMETER .250

NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS

APPROVED 14 JAN 65 REVISED (B) FOR CHANGES SEE PAGE 1 AND 2

USER ACTIVITIES.

REVIEWER ACTIVITIES.
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE CLAMP, LOOP, CUSHIONED, JOGGLED, ALUMINUM, .204 HOLE	MILITARY STANDARD MS9351
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 20261O-23T13:15Z
Check the source to verify that this is the current version before use.