This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other [illegible] activities are required to employ this standard where suitable.

Review activities: [illegible] 85

FED SUP CLASS
5306

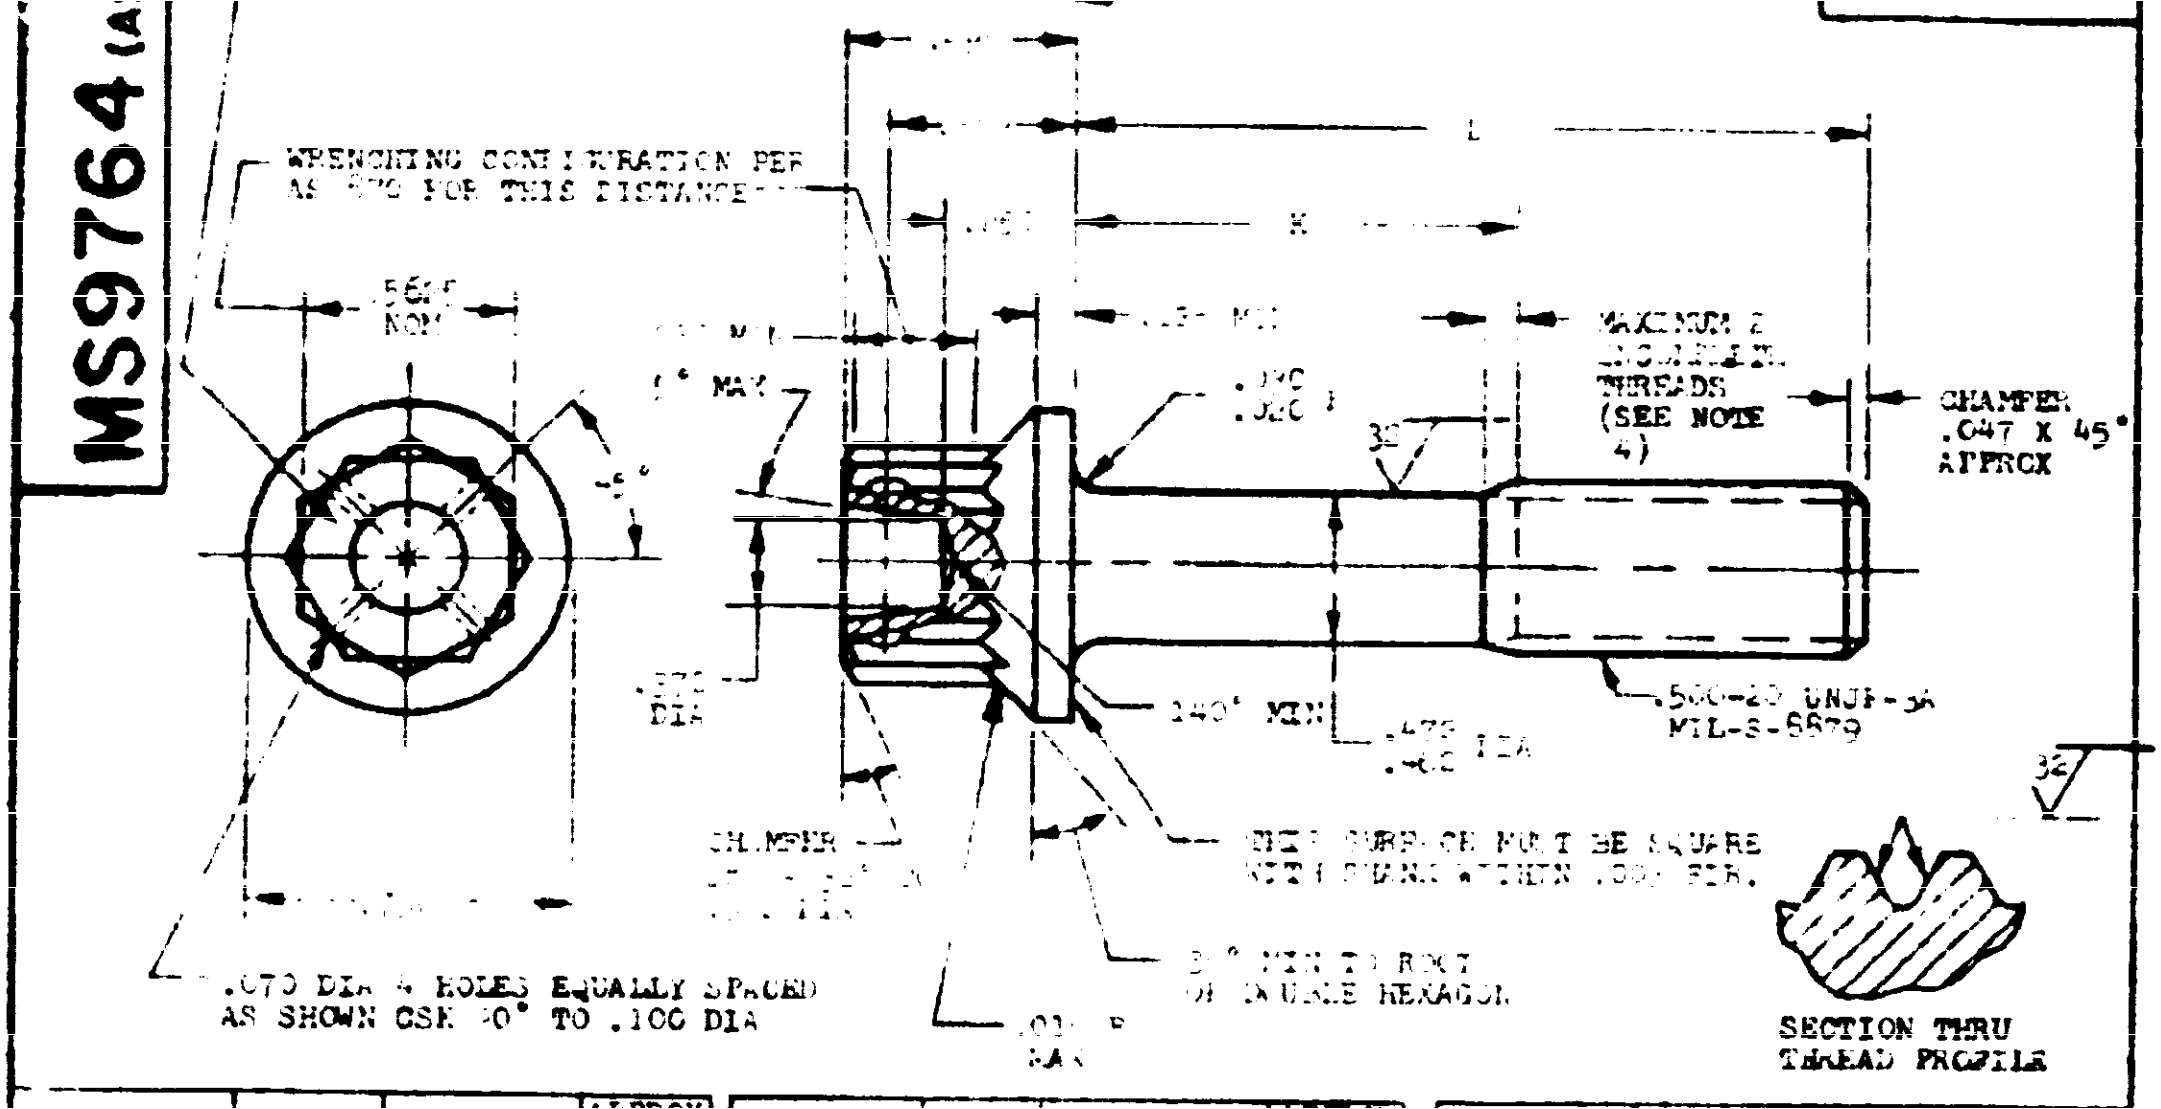
MS9764 (ASG)
MARK PART NO. AND MANUFACTURER'S IDENTIFICATION PER AS 478 CLASS A
32
WRENCHING CONFIGURATION PER AS [illegible] FOR THIS DISTANCE
.5625 NOM
45°
L
K
.453
6° MAX
.130 MIN
.090 .030
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
CHAMFER .047 X 45° APPROX
.372 DIA
140° MIN
.500-20 UNJF-3A MIL-S-8879
.475 DIA .462
CHAMFER
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .002 FIR.
[illegible] MIN TO ROOT OF DOUBLE HEXAGON
.070 DIA 4 HOLES EQUALLY SPACED AS SHOWN CSK 90° TO .100 DIA
.01[illegible] R MAX
SECTION THRU THREAD PROFILE

PART NO.	L	K	APPROX WEIGHT LB/100
MS97[illegible]	[illegible]	.10[illegible]-.12[illegible]	[illegible]
MS97[illegible]	[illegible]	.1[illegible]-.175	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	1.[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	.1[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS9764-11	1.[illegible]	.1[illegible]-.175	[illegible]
MS9764-12	[illegible]	.1[illegible]-.175	[illegible]
MS9764-13	1.375	.10[illegible]-.1[illegible]	6.0[illegible]
MS9764-14	1.4[illegible]	.125-.1[illegible]	6.15
MS97[illegible]	1.[illegible]	.150-.[illegible]	[illegible]
MS97[illegible]	1.[illegible]	[illegible]	[illegible]
MS9764-17	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]

PART NO.	L	K	APPROX WEIGHT LB/100
MS9764-22	2.000	.690-.750	7.71
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	1.1[illegible]	[illegible]
[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS976[illegible]-33	[illegible]	[illegible]	[illegible]
MS976[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]	[illegible]	[illegible]	[illegible]

PART NO.	L	K	APPROX WEIGHT LB/100
MS9764-40	4.250	2.940-3.000	13.79
MS97[illegible]	[illegible]	3.065-3.125	14.13
MS97[illegible]	[illegible]	3.190-3.250	14.47
MS97[illegible]	[illegible]	[illegible]-3.375	14.80
MS97[illegible]	4.750	[illegible]-3.500	15.1[illegible]
MS97[illegible]	[illegible]	[illegible]	1[illegible].47
[illegible]	[illegible]	[illegible]	[illegible]
MS97[illegible]7	[illegible].125	[illegible]	1[illegible].16
MS97[illegible]	[illegible].250	[illegible].000	1[illegible].49
MS97[illegible]	[illegible].375	[illegible].125	16.8[illegible]
MS97[illegible]	[illegible].500	[illegible].190-[illegible].250	17.17
MS97[illegible]	[illegible]	[illegible].375	17.5[illegible]
MS97[illegible]	[illegible].750	[illegible]	17.8[illegible]
MS97[illegible]	[illegible].875	[illegible]	18.1[illegible]
MS97[illegible]	6.000	[illegible].690-[illegible].750	18.52

1. SHANK SHALL BE STRAIGHT WITHIN .00[illegible] PER INCH OF [illegible] LENGTH.
2. THE RUNOUT OF THREAD PD IN RELATION TO THE SHANK [illegible]
3. THE RUNOUT OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON [illegible] SHALL BE WITHIN .002 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: TITANIUM AMS 4967.
6. HARDNESS: ROCKWELL C36 [illegible]2.
7. MANUFACTURING SPECIFICATION: AMS 7[illegible], EXCEPT [illegible]
8. FLUORESCENT PENETRANT INSPECTION PER AMS [illegible].
9. SURFACE TEXTURE: [illegible] UNLESS OTHERWISE SPECIFIED, [illegible] MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES [illegible] UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, [illegible] ANGULAR DIMENSIONS [illegible]
12. [illegible]

AS & AMS ARE [illegible]
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE [illegible] PART STANDARDS DIV.

REVISED

APPROVED [illegible] 69

P.A. [illegible] Other Cust [illegible]	TITLE BOLT, MACHINE [illegible]	MILITARY STANDARD MS9764 (ASG)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET [illegible] OF [illegible]

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:24Z
Check the source to verify that this is the current version before use.