INCH-POUND
MIL-DTL-17988/11E(CG)
20 November 2003


SUPERSEDING
MIL-I-17988/11D(CG)
25 June 1990

DETAIL SPECIFICATION SHEET

INSIGNIA, CAP AND HAT
CHIEF PETTY OFFICER (U.S. COAST GUARD)

This specification sheet is approved for use by the United States Coast Guard, Department of Homeland Security and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-I-17988.

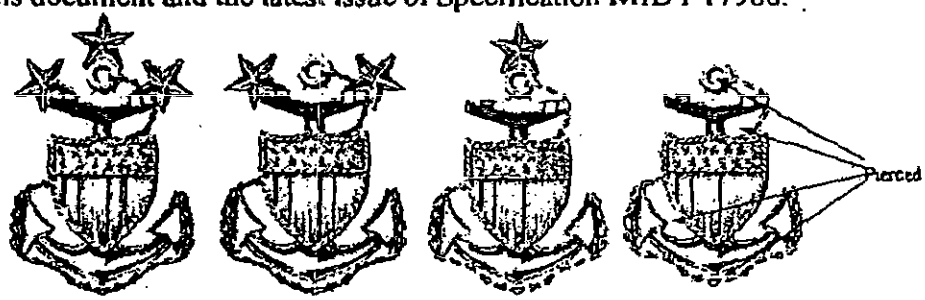

MASTER CPO OF THE CG | MASTER CHIEF PETTY OFFICER | SENIOR CHIEF PETTY OFFICER | CHIEF PETTY OFFICER

Size: Regular and miniature
Material: Brass
Design: Approved sample

Color: Shield and star – Silver
Anchor – Gold

Guide sample: Available for finish and workmanship.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Coast Guard, Uniform Clothing Design and Technical Office, P.O. Box 869, Natick, MA 01760.

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:51Z
Check the source to verify that this is the current version before use.

Dimensions (inches)	Regular (overall)	Miniature (overall)
Anchor and fouling		
Height (overall)	1 - ¾	1 - ¼
Width of anchor stock	5/8	½
Width of flukes and fouling	1 - 1/4	7/8
Tolerance	± 1/32	± 1/32
Shield		
Width	¾	1/2
Height	7/8	9/16
Tolerance	± 1/32	± 1/32
Star, diameter	3/8	3/16
Tolerance	± 1/32	± 1/32

Thickness (at thickest point): 0.085 inch (minimum) for regular and 0.075 inch (minimum) for miniature measured at anchor flukes.

Finish: Anchor – Nickel under-plated, 24 Karat Gold Electroplated, mirror-like polish and lacquered.
Shield – Silver plated, mirror-like polish and lacquered.

Forcer:
Regular: Shield – Full forcer permitted.
Anchor – No forcer permitted.

Placement of attachment:

Regular

One screw post and one registration prong shall be required. One knurled thumbnut of ½ inch diameter shall be required. The screw post and nut shall be properly sized to accommodate each other. The screw post shall be brass material with a gold-like finish.

A screw post shall be fused (soldered or electronic fusion) to the center back of the anchor shanks and fitted with a thumbnut. A registration prong shall be fused (soldered or electronic fusion) to the top back of the anchor shank. The measurement between the centers of the prongs shall be 27/32 (± 1/32) inch.

Miniature

Two prongs and two clutch fasteners are required. The prongs shall be fused (soldered or electronic fusion) to the back of the anchor, one at the top of the anchor shank and one at the bottom of the anchor. The measurement between the centers of the prongs shall be 15/16 (± 1/32) inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:51Z
Check the source to verify that this is the current version before use.

Where used:

Regular - Chief Petty Officer Hat.

Miniature – Chief Petty Officers Garrison Cap

Note:
1. The shield and stars (when applicable) shall be fused (soldered or electronic fusion) to the anchor as shown on the figure.
2. The figure is for information purposed only.
3. Packaging and packing shall be standard commercial practice.

Custodian:
Navy – NU

Preparing Activity:
Navy – NU

Review Activity:
DLA-CT

User Activity:
Navy – CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:51Z
Check the source to verify that this is the current version before use.