INCH-POUND
MIL-DTL-17988/4F
17 February 1998
SUPERSEDING
MIL-I-17988/4E(NU)
25 June 1990

DETAIL SPECIFICATION SHEET

INSIGNIA, CAP AND HAT ENLISTED PERSONNEL WORK CAP

This specification sheet is approved for use by the Defense Supply Center Philadelphia, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-I-17988.

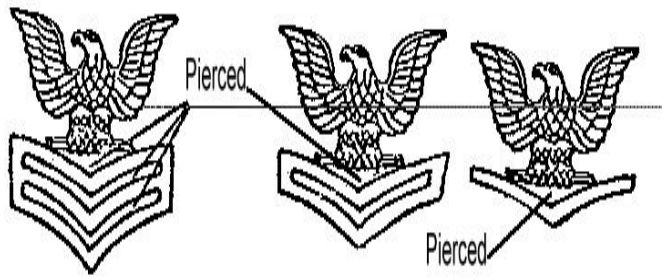

Size: Regulation

Types:
Type I - Insignia with silver finish
Type II - Insignia with black subdued finish

Material: Brass

Design: Government hub

Color: Silver (see note) or Black

Dimensions (inches)	Classification	Regulation (overall)
Eagle (Tolerance)		(± 1/32)
Width (measured at wing tips)	PO 1, 2 and 3	1-1/4
Height (overall)	PO 1st class	1-11/16
	PO 2nd class	1-7/16
	PO 3rd class	1-3/16
Eagle's perch (Tolerance)	PO 1, 2 and 3	5/8 (± 1/32)
Chevrons (Tolerance)		(± 1/32)
Width	PO 1, 2 and 3	3/32
Height	PO 1, 2 and 3	1-3/16
Width between chevrons (Tolerance)	PO 2 and 3	1/16 (± 1/32)

AMSC N/A **8455**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

Thickness: (at thickest point) - 0.064 inch (minimum) measured at chevron.

Finish: Type I - Rhodium Electroplated, mirror-like polish and lacquered.
Type II - The raw brass shall be dipped in a heated solution of brass activator and Ebonal
C. solution and dried. The pieces shall be coated with a soft baking enamel pigmented to produce the correct color, shade, and luster. The insignia shall be covered with a black finish conforming to the Institute of Heraldry Chip No. 26 except the finish shall be flat or FED-STD-595, color 37038.

Forcer: Eagle - Partial forcer permitted.
Perch and Chevrons - No forcer permitted.

Placement of attachment: Two prongs and two clutch fasteners are required. On prong shall be fused (soldered or electronic fusion) to the center of the eagle's breast (back) and the other prong shall be fused (soldered or electronic fusion) at the vertex of the Chevron nearest the perch. The measurement between the center of the prongs shall be 15/16 (± 1/32) inch.

Where used: Enlisted personnel work cap insignia.

Note:
1. When specified, the chevron(s) shall be 24 Karat Gold electroplated, mirror-like polished and lacquered.
2. The figure is for information purposes only.
3. Packaging and packing shall be standard commercial practice.

Custodian:
Navy - NU

Preparing Activity
DLA- CT

Project Number
8455-0903

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.