MIL-I-17988C(NU)
20 November 1979
SUPERSEDING
MIL-I-17988B(SA)
10 June 1973

MILITARY SPECIFICATION

INSIGNIA; CAP AND HAT, GENERAL, SPECIFICATION FOR

This specification is approved for use by the Navy Clothing and Textile Research Facility (NU), and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for insignia (metal and embroidered) in standard and miniature sizes, along with mounts and bands as applicable for caps and hats worn by male and female personnel of the Navy and Coast Guard.

1.2 Classification. The insignia as specified on the applicable Military sheet or mounts and bands when applicable, shall be as specified (see 2.1 and 6.2).

2. APPLICABLE DOCUMENTS

2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing & Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

2.1 Issue of documents - cont'd)

FEDERAL

V-T-276	-	Thread, cotton
UU-P-31	-	Paper, General Specification and Methods for Testing
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-676	-	Boxes, Setup

MILITARY

MIL-B-593	-	Braid, Textile (Flat)
MIL-C-10176	-	Cloth, Gabardine Wool, Polyester and Wool
MIL-H-15505	-	Hat, Service, Woman's
MIL-C-16290	-	Cloth, Melton, Wool (Moth Proofed)
MIL-E-17568	-	Embroidery Materials, Metallic
MIL-B-17757	-	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-82252	-	Cloth, Broadcloth, Wool, and Wool Synthetic (Moth Proofed)

STANDARDS

FEDERAL

FED-STD-151	-	Metals, Test Methods
FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

SPECIFICATION SHEETS

MIL-I-17988/	-	For Applicable Military Specification Sheet (see Supplement 1)

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

* 3.1 Detail requirements. Detail requirements or exceptions applicable to a particular insignia, shall be as specified on the applicable specification sheet. In the event of a conflict between the requirements of this specification and a specification sheet, the specification sheet shall govern.

3.2 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.2). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2.1 Government loaned property. Hubs, when furnished by the Government, shall be used only for making the contractor's working dies. The contractor's stamping and embossing dies shall be tooled and polished to remove dents, scratches, and all other imperfections (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

* 3.2.2 Approved contractor's sample. When hubs are not available, all requirements as specified on the applicable specification sheet and as exhibited by the approved contractor's sample shall apply (see 6.4).

3.3 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.2).

3.4 Materials

3.4.1 Mounts

3.4.1.1 Cloth, background

* 3.4.1.1.1 Cloth, broadcloth or melton. The background cloth to be used for the mounts of Navy male personnel, shall be either of a broadcloth or wool melton material. The broadcloth shall be either 100% wool or wool/synthetic blend conforming to types I or II, class 3, of MIL-C-82252. The wool melton shall conform to type I, class 2, of MIL-C-16290.

3.4.1.1.2 Cloth, wool-synthetic gabardine. The background cloth to be used for the mounts of Coast Guard male personnel, shall be of a wool-synthetic gabardine conforming to type II, class 8, of MIL-C-10176. The color shall be Blue, Shade 3362.

* 3.4.1.1.3 Cloth, polyester/wool tropical or gabardine. The polyester/wool tropical or gabardine to be used for the mounts of Navy and Coast Guard female personnel, shall conform to the requirements specified in MIL-H-15505.

3.4.1.2 Braid, male mounts. The braid used for the band of all male mounts shall be 1 1/2 inches in width, conforming to either Type I, class 3; type II, class 1; type III, class 2, or type IV, class 1, of MIL-B-593. The braid shall be dyed to match Blue Shade 3228, (NAVY) or Blue Shade 3362 (Coast Guard), as applicable, and shall finish 29 inches in length (minimum), exclusive of fraying.

* 3.4.1.3 Band, female mounts. The band used for all female mounts (Navy and Coast Guard), shall conform to the applicable requirements as specified in MIL-H-15505.

3.4.1.4 Stay material. The stay material used in the construction of metal insignia mounts, shall be of a flexible paperboard which has been impregnated with a minimum of 15 percent inert mineral filler. The paperboard shall be made of a cellulosic fiber, and shall finish with a thickness of 0.025 (+ 0.001) inch and weight 110.0 (+ 5 percent) pounds per 1,000 square feet. The color shall be black. Testing shall be performed as specified in 4.3.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

3.4.1.5 Leatherette. The leatherette used to back metal insignia mounts, shall be either of a fabric or paper base conforming to the requirements specified in 3.4.1.5.1 and 3.4.1.5.2.

3.4.1.5.1 Fabric base. The leatherette shall be made of any suitable woven or knitted cotton material, vinyl coated and embossed with a simulated leather effect on one side only. The fabric shall have a finished weight of not less than 14 ounces per square yard, and shall show a minimum of "good" fastness to crocking and water. Testing shall be performed as specified in 4.3.1.

3.4.1.5.2 Paper base. The leatherette shall consist of a polyvinyl chloride film bonded or laminated to a latex impregnated (30-35 percent by weight) cellulose pulpboard sheet with a suitable adhesive. The polyvinyl chloride film shall be black in color, embossed on one side only, with a finished thickness of 0.009 (+ 0.0005) inches. In addition, the polyvinyl chloride film shall show a minimum of "good" fastness to crocking and water. The latex impregnated pulpboard sheet, shall have a finished thickness of 0.030 (+ 0.0015) inches. Testing shall be performed as specified in 4.3.1.

3.4.1.6 Cloth, buckram, cotton. The cotton buckram used in the construction of embroidered mounts, shall be heavily sized and of a construction suitable for the purpose intended. The buckram may be of one or two plies, natural or black in color. When black is applicable, the buckram material shall show a minimum of "good" fastness to water. Testing shall be performed as specified in 4.3.1.

3.4.2 Thread, rayon. The rayon yarn used for accents of embroidered insignia, shall be of a continuous filament, regenerated cellulose type, and of a color and size to match the guide sample. Testing shall be performed as specified in 4.3.1.

3.4.3. Embroidery material, metallic. The metallic embroidery materials shall conform to the requirements of Type I, classes 1, 2, 3, and 6 and Type II, classes 1 through 6, of MIL-E-17568.

3.4.4 Copper base alloys

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the current version before use.

3.4.4.1 Composition. All metal insignia shall be fabricated from any of the copper alloys specified in table I, and shall conform to the applicable composition as indicated when tested as specified in 4.3.1. The copper alloy used shall be roll polished, free from pits; scale (including red oxide); dents; nicks, scratches; segregations, and foreign inclusions that cannot be removed in later processing.

Table I - Chemical composition of copper base alloys (percent)

Alloy	Copper	Nickel	Lead (max.)	Iron (max.)	Manganese (max.)	Zinc	Others (max.)
Yellow brass	64.0 to 68.5	-	0.15	0.05	-	Remainder	0.15
Red brass	84.0 to 86.0	-	0.05	0.05	-	Remainder	0.15
Nickel silver	63.0 to 66.5	16.5 to 19.5	0.10	0.25	0.50	Remainder	-
Nickel silver (pin only)	53.5 to 56 5	16.5 to 19.5	0.05	0.25	-	Remainder	0.50

3.4.5 Gold

3.4.5.1 Gold-filled metal. When gold filled brass is specified, there shall be a sheet of not less than 1/20, 10 Karat gold affixed (front only), to the surface of a commercial copper base alloy (see 4.3.1).

3.4.5.2 Gold-plating. The gold for plating shall be 24 Karat.

3.4.6 Silver.

3.4.6.1 Sterling silver. When specified, sterling silver insignia shall contain not less than 92 5 percent pure silver (see 4.3.1).

3.4.6.2 Silver-filled. When specified, silver-filled insignia shall be 1/20 silver-filled (front only) over a copper-base alloy. The silver shall contain not less than 92.5 percent pure silver (see 4.3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

3.4.6.3 Silver-plating. The silver for plating shall contain not less than 99.5 percent pure silver (see 4.3.1).

3.4.7 Solder. Solder shall be of a hard (silver alloy) compound, having a melting point of not less than 1075½ degrees Fahrenheit (see 4.3.1).

3.4.8 Lacquer. The lacquer to be used in applicable processes, shall be any suitable pale and clear synthetic lacquer. The use of pigmented lacquer shall not be permitted (see 4.3.1).

3.4 Design.

3.4.1 Metal insignia. The design of the metal insignia shall be of the exact replica as the Government-loaned hub when applicable or conform to guide and approved contractor's samples (see 3.2 thru 3.2.2).

3.4.2 Embroidered insignia. The design of the embroidered insignia, shall be in accordance with the guide sample (see 3.2).

3.5 Construction.

3.5.1 Stamping, trimming, and piercing. When applicable, the insignia shall be struck in a manner that shall insure a well defined die-struck edge. Insignia shall be trimmed, and when applicable, pierced to the die-struck outline. All edges shall be clean and smooth, free from burrs; drag; steps; and rough edges. The stamping, trimming, and piercing operations, shall not damage or distort the design or alter the shape of the insignia.

3.5.2 Forcer. When specified on the applicable specification sheet, a forcer may be used to bring up portions of the design of metal insignia.

3.5.3 Attaching devices. Attaching devices for metal insignia shall be as specified in 3.5.3.1, 3.5.3.2, or on the applicable specification sheet. Material requirements shall conform to Table I. Attaching devices shall be located as specified on the applicable specification sheet and approved guide sample.

3.5.3.1 Clutch fastener and prong. The prong and clutch fastener type shall be as shown in figure 1 and as specified herein. The prong shall be made of nickel silver and shall be soldered or electronically fused to the back of the insignia as specified. Clutches may be made from any type brass. When tested as specified in 4.4.1, the clutch shall not be removable by hand except when the clutch wings are depressed. When the size of the insignia is a limiting factor, the clutch fasteners shall be 3/8 (± 1/32) inch in diameter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

3.5.3.2 Screw post, thumb nut, and tooth lock washer The screw post, thumb nut, and tooth lock washer type fastener shall be made of yellow brass, and shall conform to the dimensions as shown in figure 1 or on the applicable specification sheet. The screw post shall be soldered or electronically fused to the back of the insignia as specified.

3.5.4 Soldering or electronic fusion Soldered or fused joints shall be strong, clean, smooth and free of burned or reduced areas Soldered joints shall be free of excess solder and flux. When solder is used, material specified in 3.4.7 shall be used. When tested as specified in 4.4.2 soldered prongs shall not separate from the insignia Fused joints shall not separate when tested as specified in 4.4.3.

3.5.5 Backs of insignia Unless otherwise specified on the applicable specification sheet, the backs of all insignia shall be flat. When a forcer is used to bring up the design, the impression of the forcer on the back of the insignia shall be regular, symmetrical, and leave no sharp corners or edges

3.6 Finish Unless otherwise specified on the applicable specification sheet, the front and edges (surfaces visible from the front) of all insignia shall be finished to match the guide or approved contractor's sample for color and finish (see 3.2 and 3.2.2).

3.6.1 Gold plating Gold specified in 3.4 5.2, shall be used for gold plating. Prior to plating, the insignia shall be cleaned of matter that may affect the gold plating. The plating shall be non-porous and continuous over the entire surface, and there shall be no cut through, peeled, or blistered plating. The back of the insignia shall be bright and clean The base metal shall be either yellow brass or red brass specified in 3.4.4.1 or as specified on the applicable specification sheet The use of white metal as an undercoating for gold shall not be permitted No visible chemical reaction shall appear when tested as specified in 4.4.4. When gold-filled material is specified, the insignia shall be given a flash of gold.

*3.6.2 Silver plating Prior to plating, the insignia shall be clean of all matter that may affect the silver plating. The silver used for silver plating shall be as specified in 3.4 6.3. Brass items shall be hot nickel silver underplated a minimum of 0.00025 inch in thickness Nickel silver items will not require nickel underplating Silver filled items shall not be underplated. The silver plating shall be a minimum of 0.003 inch in thickness, and shall be smooth; fine grained; adherent; and free from visible defects. Items made of silver filled material, shall be tested on their reverse side for compliance with the silver plating thickness requirement. Items made of brass, shall be silver thickness tested on their reverse side (see 4 3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

* 3.6.3 Rhodium plating. When rhodium plating is specified, any copper base alloy may be used which has an underplating of nickel a minimum of 0.00025 inch thick. (see 4.3.1). The nickel plated device shall be burnished before plating. When tested as specified in 4.4.4, no visible chemical reaction shall appear. Silver-filled material shall be nickel plated prior to rhodium plating.

3.6.4 Lacquering. Insignia shall be lacquered as specified on the applicable specification sheet. The lacquer film shall be continuous, level, adherent, and free from dust, lint, and other foreign inclusions. When tested as specified in 4.4.5, there shall be no change in the lacquered face of the insignia except for a slight yellowing of the highlights and not more than two spots, each less than 1/16 inch largest dimension affecting appearance. When tested as specified in 4.4.6, the tissue paper shall not adhere to the lacquered surface.

3.7 Mounts.

3.7.1 Design and dimensions. The design and dimensions of the mounts shall be as shown in Figures 2 and 3.

3.7.2 Stitches, seams, and stitching. Stitches, seams, and stitching types shall conform to FED-STD-751. All thread breaks and ends of stitching shall be backstitched a minimum of 1/4 inch.

3.8 Construction of mounts.

* 3.8.1 Metal insignia mounts. The mount shall consist of three (3) full lengths of material, consisting of the impregnated paperboard stay inserted between the applicable background cloth and leatherette material. The background cloth which covers the entire face and curved edge of the mount, shall be as specified in 3.4.1.1.1 thru 3.4.1.1.3 as applicable. The leatherette which covers the entire back of the mount, shall be as specified in 3.4.1.5. Assemble as specified

a. Cement the impregnated paperboard stay to the applicable background cloth, turning the edge of the cloth over the stay 1/4 (± 1/16) inch on the curved section and cement to the stay forming a finished edge.

b. The straight edges of the mount shall be unfinished (not covered by background cloth or leatherette material).

c. Cement the leatherette material to the impregnated paperboard stay.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

* 3.8.1 Metal insignia mounts (cont'd).

d. Stitch along the curved section of the mount approximately 1/16 inch from the edge and extend the stitching to the bottom of the mount (see Figure 2).

Stitch Type	Stitches per inch
301	12-14

e. All male mounts shall be centered and sewn to the band (see 3.3.1.2), by stitching around the base 1/16 to 1/8 inch from the straight edges and across the back (see Figure 2).

Stitch Type	Stitches per inch
301	12-14

Needle and bobbin thread for stitching shall be cotton, conforming to type IC2, ticket no. 00, 3-ply, of V-T-276. The color of the thread shall be Black AA, cable no. 66043 (Navy) and Blue AT, cable no 66060 (Coast Guard). Fnds of all stitching shall be backstitched not less than 1/4 inch. Perforations shall be made in the mount to correspond with the screw posts of the applicable metal insignia. For the Coast Guard, the perforation shall be 1/8 ± 05 inch in diameter and centered 1 1/8 ± 1/16 inch from the top finished edge and 1 3/16 ± 1/32 inch from the side finished edge. Unless otherwise specified, female metal mounts do not require bands.

* 3.8.2 Embroidered insignia mounts. The mount shall be constructed of three (3) layers of materials, consisting of the cotton buckram inserted between two (2) plies of the background material. The background cloth as applicable, shall be as specified in 3.4.1.1.1 thru 3.4.1.1.3. The cotton buckram shall be as specified in 3.4.1.6. Assemble as follows:

a. Superimpose a ply of the background cloth to the cotton buckram, folding the background cloth over all cotton buckram around the curved edge approximately 1/4 inch and cement.

b. Center the mount on the band and join the components together by the applicable embroidered insignia.

c. Superimpose and cement the other ply of background cloth to the cotton buckram for the mount backing.

d. Stitch the mount approximately 1/16 inch around the curved edge.

Stitch Type	Seam Type	Stitches per inch
301	SSb-1	10-12

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the currentversion before use.

* 3.8.2 Embroidered insignia mounts (cont'd).

Needle and bobbin thread for stitching shall be cotton, conforming to type IC2, ticket no. 00, 3 ply, of V-T-276. The color of the thread shall be Black AA, cable no. 66043 (Navy) and Blue AT, cable no. 66060 (Coast Guard). As an alternate, the edge may be hand stitched using the thread specified above. Embroidered insignia shall be no closer than 3/16 inch to the finished edge of the mount.

3.9 Dimensions and tolerances. Unless otherwise specified, the following tolerances shall apply to dimensions specified herein. When a Government loaned hub is available for use, the hub shall control.

Fractions up to and including 1/2 inch	± 1/64 inch
Fractions more than 1/2 inch	± 1/32 inch
Decimals up to and including 0.125 inch	± 0.005 inch
Decimals more than 0.125 inch	± 0.010 inch

3.10 Marking for identification. The contractor shall stamp his trademark or other identifying mark, legibly and inconspicuously on the back of each metal insignia. In addition, precious metal insignia shall bear the fineness of quality marking.

3.11 Weight. Weight specified on the applicable specification sheet does not include clutch fasteners, thumb-nut or lock washers, but does include prongs or screw posts. Testing shall be as specified in 4.4.7.

3.12 Workmanship. The finished insignia or mounts and bands as applicable, shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification

4.2 First article inspection. When required, the first article submitted in accordance with 3.2, shall be inspected as specified for compliance with design, construction, workmanship, and dimensional requirements

4.3 Inspection Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

* 4.3.1 Component and material inspection In accordance with 4 1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, components and materials listed in table II shall be tested for the characteristics specified and in accordance with the referenced test method, whenever applicable. The unit for expressing the lot size and sample unit shall be as indicated in table II. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be as shown below, and the lot shall be unacceptable if one or more units fail to meet any requirements specified.

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

Table II Component tests

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as: Pass or Fail	Results reported as: Numerically to nearest	Sample unit
Stay material, impregnated paperboard (sheets or sq feet)	Material identification	3.4.1.4	1/	-	-	-	9 sq ft
	Percent filler	3.4.1.4	1/	-	-	-	
	Thickness	3.4.1.4	Method 7173 of UU-P 31	-	-	-	
	Weight	3.4.1.4	Method 110 of UU-P-31	-	-	-	
Leatherette fabric base (yards)	Material identification	3.4.1.5.1	1/	-	-	-	
	Coating identification	3.4.1.5.1	1/	-	-	-	
	Weight	3.4.1.5.1	Method 5041 of FED-STD-191	-	-	-	
	Colorfastness to:						
	Crocking	3.4.1.5.1	Method 5651 of FED-STD-191	-	-	-	1 yd
	Water	3.4.1.5.1	Method 5630 of FED-STD-191	-	-	-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

Table II Component tests (cont'd)

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as Pass or Fail	Results reported as Numerically to nearest	Sample unit
Paperbase (pounds, sheets, or sq ft)	Material identification of specified components	3 4.1 5.2	1/	-	-	-	
	Thickness of polyvinyl chloride film	3.4.1.5.2	Method 173 of UU-P-31	-	-	-	
	Thickness of latex impregnated pulp board	3.4.1.5.2	Method 173 of UU-P-31	-	-	-	9 sq feet
	Colorfastness to (Polyvinyl chloride film) Crocking	3.4.1.5.2	Method 1/ 5651 of FED-STD-191	-	-	-	
	Water	3.4.1.5 2	Method 5630 1/ of FED-STD-191		-	-	
Cloth, buckram	Material identification	3 4.1.6	1/	-	-	-	
	Color	3 4.1.6	1/	-	-	-	
	Colorfastness to Water	3.4.1.6	1/	-	-	-	

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the current version before use.

Table II Component tests

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as: Pass or Fail	Results reported as: Numerically to nearest	Sample unit
Thread, rayon	Material identification	3.4.2	1/	-	-	-	
Copper base alloy (as applicable, lbs)	Chemical composition	3.4.4.1	Method 111 or 112 of FED-STD-151	2 for each element		0.1% each element	4 oz. (composite)
Gold filled material	Karat and weight of lamination	3.4.5.1	1/*	-	-	-	
Gold (for plating)	Karat and base metal	one 3.6.1					
Sterling silver	Fineness	3.4.6.1	1/	-	-	-	
Silver-filled material	Fineness and weight of lamination	3.4.6.2	1/**	-	-	-	
Silver (for plating)	Fineness	3.4.6.3	1/	-	-	-	
	Brass item:						
	Material identification of underplating	3.6.2	1/	-	-	-	
	Thickness of underplating	3.6.2	1/	-	-	-	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

Table II Component tests

Component and lot size expressed in terms of	Characteristic	Requirement paragraph	Test method	Determinations per sample unit	Results reported as Pass or Fail	Results reported as Numerically to nearest	Results reported as Sample unit
Solder	Material identification	3.4.7	1/	-	-	-	
Lacquer	Material identification	3.4.8	1/	-	-	-	
Attaching device	Material identification	3.5.3	1/	-	-	-	
Rhodium (for plating)	Material identification Underplating	3.6.3	1/	-	-	-	

1/ A certificate of compliance is required and will be acceptable for the stated requirement.

* In the event of a dispute, the material shall be tested for gold content in accordance with 4.4.8.

** In the event of a dispute, the material shall be tested for silver content in accordance with 4.4.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing processes to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection had indicated nonconformance.

4.3.3 Examination of the end item. The defects found during the examinations of the end items shall be classified in accordance with 4.3.3.1 and 4.3.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.3.3. The sample unit shall be one finished insignia with/or the applicable mount and band when specified. The lot size shall be expressed in terms of the sample unit.

* 4.3.3.1 Visual examination The finished insignia or mount and band when applicable, shall be examined for defects in design, material, construction, workmanship and marking. Defects designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Table III - Classification of defects

Examine	Defect	Classification Major	* Minor
Mount and band	- Hole, cut, tear, or rip	X	
	- Design and/or configuration of mount not as specified	X	
	- Construction of mount not as specified	X	
	- Any evidence of cement visible on face side of mount	X	
	- Mount not stitched to band as specified	X	
	- Width of band not as specified	X	
	- Length of band exclusive of fraying, not as specified	X	
	- Band material not braided or black in color		X
	- Perforation for screwpost hole in mount omitted		X
	- Color of background cloth for face side of mount not as specified		X
	- Color of leatherette (mount backing) not as specified		X

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects (cont'd)

Examine	Defect	Classification Major	*	Minor
Mount and band (cont'd)	- Tight tension of mount or band attachment, as evident by puckering or distortions	X		
	- Spot, stain, or streak (longest dimension in any direction)			
	1. Up to 1/4 inch, inclusive			X
	2. More than 1/4 inch	X		
	- Stitch type utilized in mount construction, not as specified			X
	- Stitches per inch in mount construction, not as specified			X
	- Open seam			
	1. Up to 1/2 inch, inclusive			X
	2. More than 1/2 inch	X		
	- Thread breaks not repaired or backstitched			X
	- Loose tension of stitch thread on mount or band			X
Insignia (embroidered)	- Not equal to guide sample for detail of design	X		
	- Type not as specified	X		
	- Application of embroidery materials not as specified	X		
	- Accent yarns omitted			X
	- Insignia not positioned on mount and band as specified			X
	- Any evidence of broken embroidery yarn	X		
Insignia (metal) A Front Color or Finish	- Does not compare favorably with approved contractor's sample or approved first article		*	
	- Oxidized finish has not been sufficiently relieved or has been excessively relieved (when required)		*	

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

Table III - Classification of defects (cont'd)

Examine	Defect	Classification Major	*	Minor
Lacquer	- Omitted, not smooth, flaky, blistered, peeling, tacky, or foreign matter embedded			X
Design	- Construction or design details altered, obscured, or not conforming to Government's hub or approved contractor's sample	X		
	- Warped, twisted, or distorted	X		
	- Detail struck over, resulting in a double impression		*	
Quality of Metal	- Surface pitted, porous, or evidence of scales, scratches, nicks, or dents		*	
B Back Plating	- Foreign matter imbedded		*	
	- Not plated when required	X		
	- Plating not smooth, porous, or continuous			X
	- Peeling, flaky, chipped	X		
	- Type not as specified	X		
Lacquer	- Lacquer missing, tacky, not adherent, foreign matter imbedded			X
Fastening device	- Not specified type	X		
	- Any component part missing	X		
	- Not positioned as specified		*	
	- Pin bent affecting use		*	
	- Clutch fasteners do not function properly		*	
	- Not attacked in specified manner	X		
Marking	- Missing, incorrect, illegible, or misspelled			X
	- Fineness marking missing (when applicable)	X		
C. Front, Back and Edges				
Workmanship and Construction	- Surface or edge not clean, not smooth or free from burrs, roughness, drag, step, or tool marks		*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

Table III - Classificatin of defects (Cont'd)

Examine	Defects	Classification Major	* Minor
C. Front, Back and Edges (Cont'd)			
Workmanship and Construction	- Metal marks on exposed surface such as nick, dent, dig, gouge, or scratch		*
	- Edge not die-strick, when applicable	X	
	- Not trimmed to the die-struck edge, when applicable		*
	- Die-struck edge, rim or outline is not well defined, when applicable		
	- Not trimmed to the die-struck edge, when applicable		*
	- Pierced edge not clean and smooth, e.g., any burr, drag, cutter, or file mark, when applicable		
	- Design or shape is damaged, distorted, or altered by piercing operation, when applicable	X	
	- Forcer used when not specified or insignia forced in other than specified location		*
	- Impression of the forcer (when applicable) is not symmetrical with the design on the front		X
	- Metal torn or broken out by use of forcer		X
	- Any component missing, bent, twisted, broken, or malformed		*
	- Solder does not completely unite parts, i.e., any perceptible opening between component parts		*
	- Area burned or reduced in soldering		*
	- Soldered joint not clean or smooth		X
	- Excess solder or excess flux not removed		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional examination. The insignia, mount and band, shall be examined for defects in dimension. Any measurement deviating from specified dimension or tolerances specified in 3 1 or applicable specification sheet, shall be scored a defect.

4.3.3.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and acceptable quality levels (AQL's), expressed in defects per 100 units (DHU) for visual and dimensional examinations, shall be as follows:

	Inspection level	AQL	
		Major	Total
For defects applicable to 4.3.3.1	II	2.5	15.0
For defects applicable to 4.3.3.2	S-3	(one class)	4.0

* 4.3.4 Examination of packaging requirements. An examination shall be made to determine that packaging, packing, and marking complies with the Section 5 requirements of this specification. The sample unit shall be one shipping container fully prepared for delivery, except that it need not be closed. Examination for the closure defects listed below shall be made. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper location, sequence, or method of application. Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as. incomplete closure of container flaps, loose strapping, inadequate stapling, or improper taping. Bulged or distorted container. Open and not continuous heat sealed seams of polyethylene bag or incorrectly fabricated bag
Content	Number of insignia or insignia with mounts and band per intermediate package, more or less than specified 1/ Number of intermediate packages per shipping container, more or less than specified 1/

1/ For the defect, one container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the current version before use.

* 4.4 Testing of the end item. Completely fabricated metal insignia shall be tested for all characteristics specified in table III. All test reports shall contain the individual values utilized in expressing the final results. All results shall apply to the average of the determinations made on the sample unit. The sample unit for testing shall be three (3) finished metal insignia of each type being processed, except for fused prong or joint testing in which the sample unit shall be one (1) and all prongs on that item shall be tested. The inspection level shall be S-2 and the AQL shall be 6.5. The sample size for all testing shall be as shown below. The lot size shall be expressed in units of finished insignia.

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if any sample unit fails to meet any requirement specified. Regardless of the number of prong or joint failures on applicable sample unit, it shall be classified as one defective unit.

Table III - End item tests

Characteristic	Requirement paragraph	Test Method
Test for clutch fastener and prongs	3.5.3.1	4.4 1
Test for soldered prongs or joints	3.5.4	4.4.2
Test for fused prongs or joints	3.5.4	4.4 3
Test for gold plating	3.6.1	4.4.4
Test for nickel underplating thickness	3.6.2	STD Comm'l
Test for silver plating thickness	3.6.2	STD Comm'l
Test for rhodium plating	3 6.3	4.4.4
Test for lacquer 1/		
Liver of sulfur	3.6.4	4.4.5
Tackiness	3.6.4	4.4 6
Weight	3 11	4.4 2

Source: https://assist.dla.mil -- Downloaded: 20260-18T10:50Z
Check the source to verify that this is the current version before use.

4.4.1 Test for clutch type fastening devices. The clutch fastener shall be removed from each prong of the attaching device and replaced 10 times, after which it shall not be possible to remove any clutch fastener from its prong except by depressing the release wings.

4.4.2 Solder joint test. Samples to be tested shall be placed in an oven maintained at 1065°F (± 5°F) for not less than 15 minutes. While at the specified oven temperature, samples shall be lifted by the attaching device and shall be inspected for compliance with 3.5.4.

* 4.4.3 Test for electronically fused joints. Item to be tested shall be anchored on a horizontal surface. The prong shall be grasped at least 1/5 its length above the fused joint and bent thru an angle of 90¼ (45 degrees to each vertical) until separation occurs. The fused joint shall then be examined to determine compliance with 3.5.4. A bending tool in the form of a 45', template may be used for this test provided the prong is gripped at least 1/3 its length above the fused joint.

* 4.4.4 Acid test for gold or rhodium plating. Insignia may be unlacquered or have the lacquer completely removed with an organic solvent. The acid test shall be conducted as follows. Use a test acid consisting of a solution containing 50 percent by volume nitric acid (specific gravity 1.42) and an equal volume of distilled water. At room temperature place a drop of test acid (each drop to be 1/8 inch minimum diameter on three different spots on the face of the insignia. The drops shall remain on the insignia for not less than one minute, a minimum of two of these spots shall withstand this test.

* 4.4.5 Liver of sulfur test for lacquer. (not applicable to gold insignia). The insignia shall be immersed in a 2 percent by weight of CP liver of sulfur (sulfated potash) water solution at a temperature of 100¼ ± 10¼F for a period of 3 minutes. The insignia shall then be removed and rinsed in warm, then cold, then hot water after which it shall be wiped gently with an absorbant cellulose material or whirled to remove residual moisture, allowed to air dry at room temperature (60 to 80¼F) for 1 hour and examined to determine compliance with 3.6.4.

4.4.6 Tackiness test. A piece of tissue paper shall be pressed against the finished lacquered metal device while at room temperature (60¼ to 80¼F) for 15 seconds, with any pressure capable of being exerted by the thumb and two fingers. At the completion of 15 seconds, the finger pressure shall be released to determine compliance with 3.6.4.

4.4.7 Tests for weight. Twelve (12) insignia of each type and size, including prongs or screw post (does not include clutch fasteners, thumb - nut, or lock washers), shall be weighed and the average weight determined. The lot shall be rejected if the average weight is less than the minimum specified.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the currentversion before use.

* 4.4.8 Gold content. Boil 1 gram of alloy (accurately weighed) with 60 ml. 1;1 nitric acid (HNO_3) in a 400 ml. beaker using a small flame or hot plate Continue boiling until all metals except the gold are in the solution Dilute to 200 ml with hot water. Filter through a rapid ashless filter paper, and wash several times with hot water. Take the filter paper with the gold (cutting off any excess filter paper), wrap in a 2 inch by 2 inch piece of silver-free foil, and roll into a ball Place the ball in the hollow of a bone ash cupel, and add lead shot around the ball. Place cupel in a muffle furnace for one hour at 1000¼C Remove from the furnace, and examine hollow for flakes of gold, impurities, and discolored gold bead. If any are noticed, add additional lead shot and return cupel to the muffle furnace for one hour. Otherwise, cool the gold bead and weigh. The gold content shall be calculated as follows

$$\frac{W(AU)}{WS} \times 100 = P24$$

$$\frac{W(AU)}{WS} \times \frac{24}{10} \times 100 = PIO$$

Whereas:

W(AU)	=	weight of Gold
WS	=	weight of Sample
P24	=	percent of 24 Karet gold
PIO	=	percent of 10 Karet gold

* 4.4.9 Silver content. Transfer a 0.5 gram sample, accurately weighed and free of rhodium plating to a 250 ml. beaker. Add 20 ml of 1:4 nitric acid (HNO_3), warm until a solution is complete, and boil to expel brown fumes. Cool, transfer to a 1000 ml. volumetric flask, and dilute to the mark. Pipette a 200 ml. aliquot from the flask into a 400 ml. beaker Heat to boiling, and add HCL (3:100) drop by drop from a pipette until precipitation is complete (1 ml. of HCL solution precipitates about 0.038 grams of silver). When solution has cooled and precipitate has settled, determine whether precipitation is complete by adding a few drops of the HCL (3:100). If solution remains clear, filter on a weighed porcelain gooch crucible Wash the precipitate several times with HNO_3 (1.200) and finally with cold water. Protect the silver chloride from the light, dry in an oven for not less than two hours, cool and weigh. The silver content shall be calculated as follows

$$\frac{W\ (AGCL) \times 752.63 \times 5 \times 100}{WM} = P$$

Whereas:

W(AGCL)	=	weight of silver chloride
WM	=	weight of metal
P	=	Percent of silver

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be Level A or Commercial as specified (see 6.3) or as specified on the applicable specification sheet.

5.1.1 Level A

5.1.1.1 Unit packaging

* 5.1.1.1.1 Metal insignia without mount or bond. A single insignia of one type and style only, shall be mounted on a white sulfite card with its own attaching device. The card shall be 0.011 inch in thickness, and shall finish 2 1/2 inches square. Each mounted insignia shall then be individually packaged into a snug-fitting, clear polyethylene film bag, having a minimum thickness of 0.002 inch. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edge of the bag. The final closure of the bag shall be heat sealed, with the seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting A 1/4 inch diameter hole shall be made at one corner of each polyethylen bag to allow excess air to escape. Each unit package shall be identified as specified in 5.3.1.

* 5.1.1.1.2 Metal insignia with mount and band (See Specification Sheet 17988/5 and 17988/7) When insignia along with the mount and band are furnished as a unit, each insignia with the band neatly wrapped around the mount, shall be inserted into a snug-fitting, clear polyethylene film bag, having a minimum thickness of 0.002 inch. The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed, with the seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of each polyethylene bag to allow excess air to escape.

5.1.1.1.3 Embroidered insignia. When specified, the insignia; mount, and band shall be packaged in accordance with standard industry practice or as specified by the procuring activity.

5.1.1.2 Intermediate packaging

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

* 5.1.1.2.1 Metal insignia without mount or band. Fifty (50) metal insignia, unit packaged as specified in 5.1.1.1.1, shall be inserted into a set up paperboard box conforming to type I, variety 1, class A, style 4, of PPP-B-676 The outside dimensions of the box (cover included), shall be 7 inches in length, 5 5/8 inches in width, and 2 1/2 inches in height. Box closure shall be in accordance with the appendix of the container specification.

* 5.1 1.2.2 Metal insignia with mount and band (see Specification Sheet 17988/5 and 17988/7). Thirty (30) metal insignia with mount and band, unit packaged as specified in 5.1.1 1 2, shall be inserted into a folding paperboard box conforming to variety 1, style III, type G, class 1 or 3, subclass 2, of PPP-B-566 or into a set-up paperboard box conforming to type I, variety 1, class A, style 4, of PPP-B-676. The outside dimensions of the applicable paperboard box (cover included), shall be approximately 11 1/2 inches in length, 5 1/8 inches in width, and 3 1/2 inches in height. Box closure shall be in accordance with the appendix of the applicable container specification.

5.1.2 Commercial. Insignia shall be preserved-packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2) or as specified on the applicable specification sheet.

5.2. Level A

* 5.2.1.1 Metal insignia without mount or band. Twelve (12) intermediate containers as specified in 5.1.1.2.1, consisting of one type only, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather-resistant, grade V2s, size 1, of MIL-B-17757. Toward the end of the contract, or when there are less than the required amount per container of the same type, mixed types may be packed within the same container.

* 5.2.1.2 Metal insignia with mount and band Six (6) intermediate containers as specified in 5 1.1.2.2, consisting of one type only, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to class weather resistant, grade V2s, size 1, of MIL-B-17757

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

5.2.1.2 Metal insignia with mount and band (cont'd). Level A packages shall be packed flat, three in length, one in width, and two in depth within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the type, mixed types may be packed within the same shipping container.

5.2.1.3 Embroidered insignia. Embroidered insignia, packaged as specified in 5.1.1.1.3, shall be packed in accordance with standard industry practice or as specified by the processing activity.

5.2.2 Level B.

* 5.2.2.1 Metal insignia without mount or band. Twelve (12) intermediate containers as specified in 5.1.1.2.1, consisting of one type only, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 1, of MIL-B-17757. Toward the end of the contract, or when there are less than the required amount per container of the same type, mixed types may be packed within the same container.

* 5.2.2.2. Metal insignia with mount and band. Six (6) intermediate containers as specified in 5.1.1.2.2, consisting of one type only, shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 200, size 1, of MIL-B-17757. Level A packages shall be packed flat, three in length, one in width, and two in depth within the shipping container. Toward the end of the contract, or when there are less than the required amount per container of the same type, mixed types may be packed within the same shipping container.

* 5.2.2.3 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping containers shall be grade V3c, W5c, or W6c fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the box specification.

* 5.2.3 Commercial. Insignia, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, intermediate and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

* 5.3.1 Special marking for identification. Insignia, packaged as specified in 5.1.1.1.1, shall have the required information legibly printed or stamped in black directly on the polyethylene bag across the center face or on a white paper label inserted within the bag so as to permit ready identification. The bag or label shall indicate the following information:

ITEM NOMENCLATURE
STOCK NUMBER
QUANTITY
NAME OF CONTRACTOR

As an alternate, the marking may be inscribed on the white sulfite card so long as the printing is not obstructed from view.

* 5.3.2 Labels, mixed types. Each shipping container, packed with mixed types, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED TYPES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and types contained therein.

6. NOTES

6.1 Intended use. The insignia, mounts and bands, covered by this specification and applicable specification sheet, are intended for use on hats or caps worn by male and female personnel of the U.S. Navy and U.S. Coast Guard.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification
b. The number and date of applicable specification sheet and supplement (see 2 and 2.1)
c. Availability of guide sample (see 3.2)
d. When a first article is required (see 3.3)
e. When mount or band is required
f. Selection of applicable levels of packaging and packing (see 5.1 and 5.2)
g. When weather-resistant fiberboard shipping containers are required for level B packing (see 5.2.2.3)

6.3 Government loaned hubs. For access to Government loaned hubs, address the procuring activity or the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 (see 3.2.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

* 6.4 Approved contractor's sample. A contractor submitting a sample for Government approval shall forward the sample to the procuring activity or to the Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760.

* 6.5 This specification shall be used in conjunction with the applicable supplement and specification sheet or other document which lists the specific requirements for the insignia to be procured.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccordacies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.


Custodian:
Navy - NU

User activity:
Navy - CG


Preparing activity
Navy - NU

Project No. 8455-N568

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

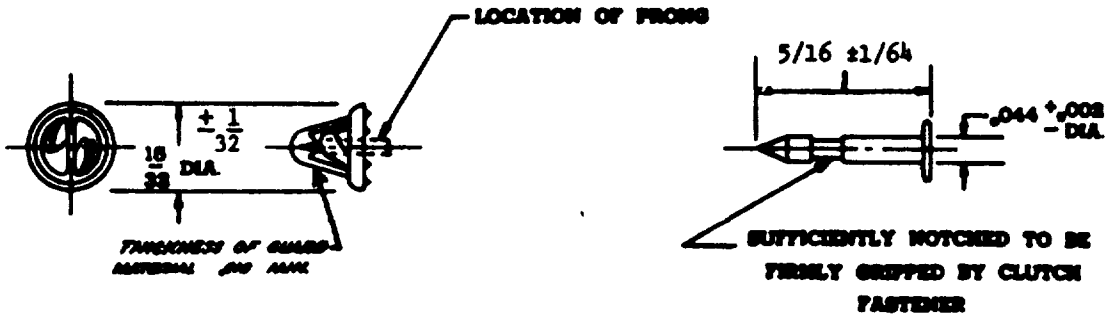


PRONG AND CLUTCH TYPE

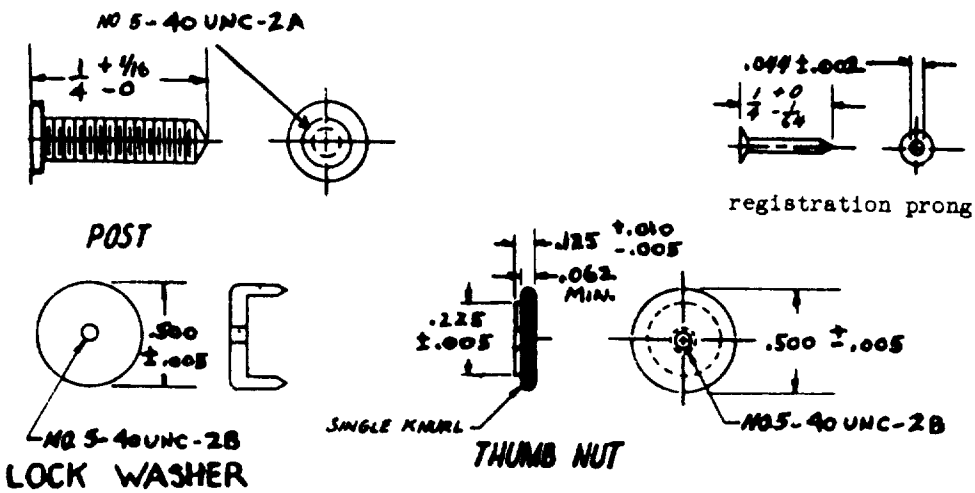


SCREWPOST TYPE
w/ registration prong


FIG. 1 - METAL ATTACHING DEVICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

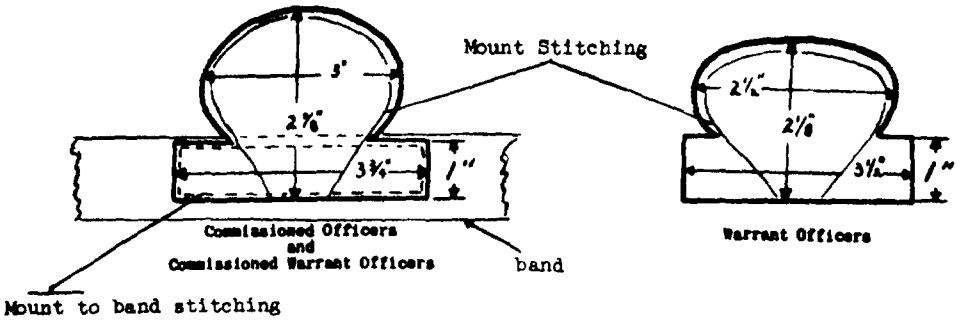




Chief Petty Officers - Navy and C.G
Enlisted men (CG)




Special Bands
(U.S. Navy and Naval Academy Bands)



Naval Academy Midshipmen
Naval Reserve Officers Training Corps Midshipmen
Avia. Off. Cand.
Enlisted Men

Note: Metal mounts (male) shall be stitched to band as shown above.

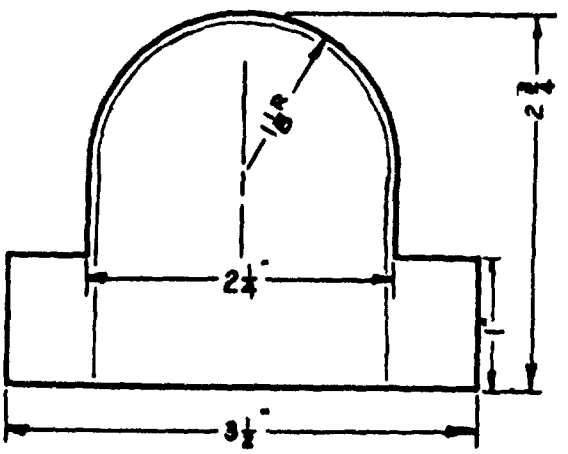

Coast Guard Academy Cadets

MOUNTS FEMALE



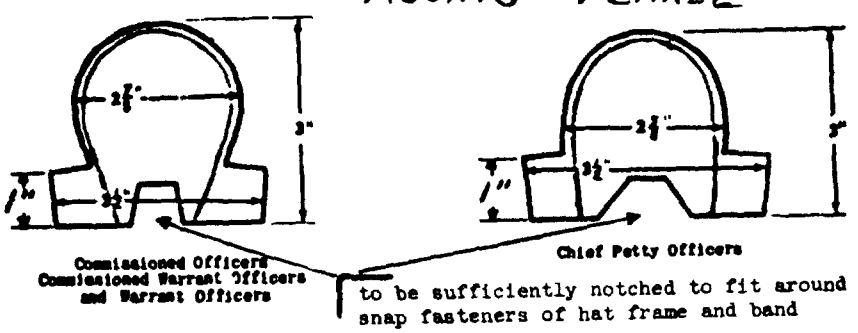


FIG. 2 - MOUNTS, MALE AND FEMALE (NAVY)
(COAST GUARD AS APPLICABLE)

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the currentversion before use.

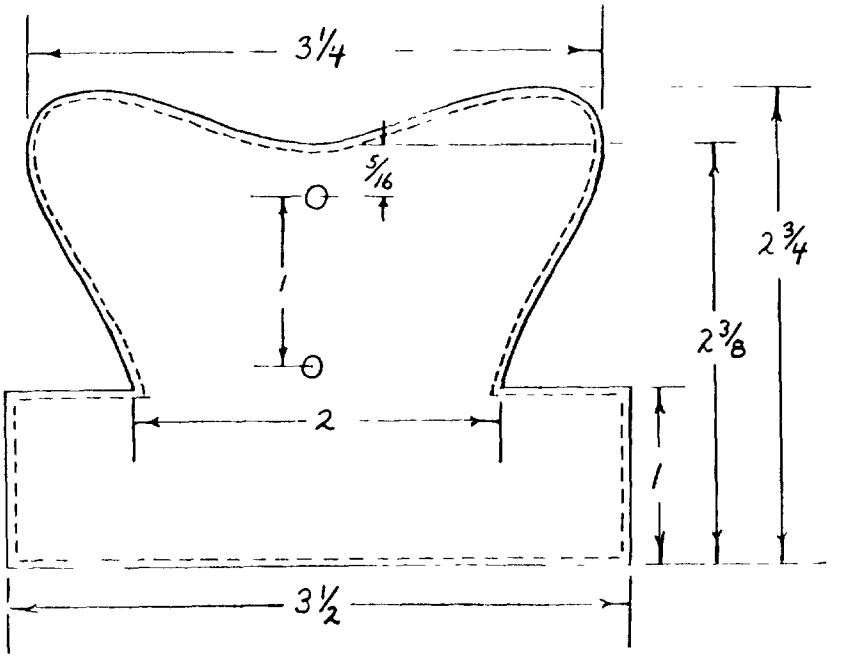

MALE COMMISSIONED OFFICERS AND COMMISSIONED WARRANT OFFICERS

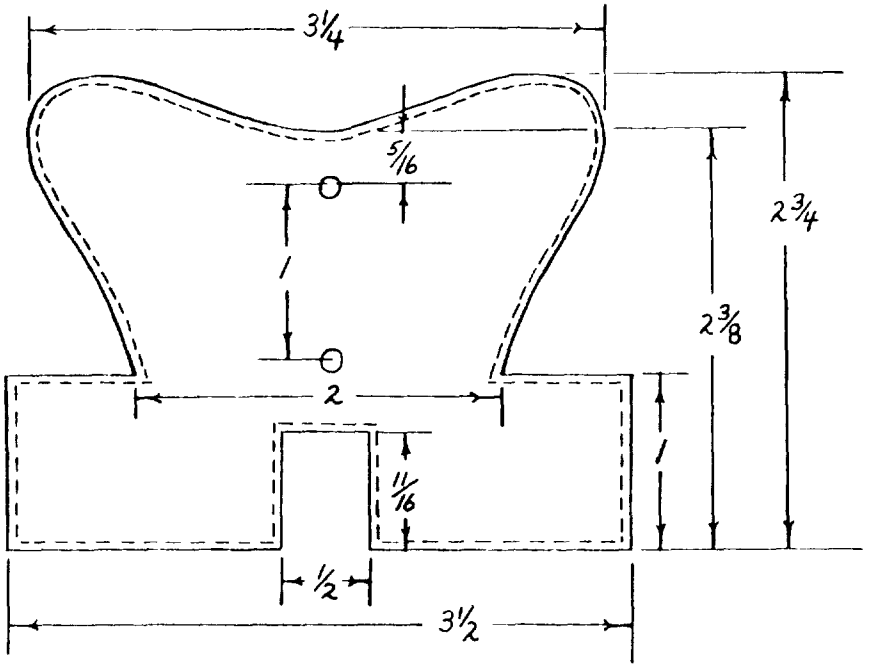

FEMALE COMMISSIONED OFFICERS AND COMMISSIONED WARRANT OFFICERS

FIGURE 3 - MOUNTS, MALE AND FEMALE (COAST GUARD)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-I-17988C(NU) INSIGNIA; CAP AND HAT, GENERAL, SPECIFICATION FOR

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

[ ] VENDOR [ ] USER [ ] MANUFACTURER

1 [ ] HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? [ ] IS ANY PART OF IT TOO RIGID RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102 LF 001 4260

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:50Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD 316

U.S MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:50Z
Check the source to verify that this is the current version before use.