
INCH-POUNDS

MIL-I-17988/8C(NU)
25 June 1990
SUPERSEDING
MIL-I-17988/8B(NU)
8 January 1985

MILITARY SPECIFICATION SHEET
INSIGNIA, CAP AND HAT
U.S. NAVY BAND/NAVAL ACADEMY BAND

This Specification sheet is approved for use by the Navy Clothing and Textile Research Facility, Department of The Navy and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-I-17988.

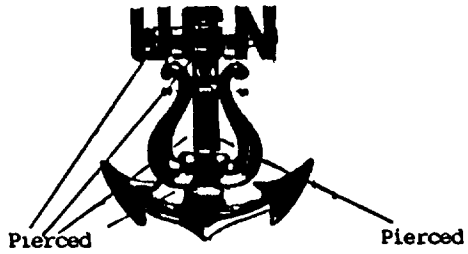

Size:	Regulation
Material:	Brass
Design:	Approved sample
Color:	USN - Silver Lyre and Anchor - Gold

Guide sample: Available for finish and workmanship.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, Ma. 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

Dimensions (inches)	Regulation (overall)
Anchor	
Length (overall)	1-15/16
Width of anchor stock	1-1/8
Width of anchor across flukes	1-11/16
Tolerance	± 1/32
USN	
Length (overall)	1-1/8
Height	7/16
Tolerance	± 1/32
Lyre	
Length (overall)	1-3/16
Width	
at widest point	7/8
at top of lyre	11/16
Tolerance	± 1/32

Thickness: (at thickest point): 0.115 inch (minimum) measured at lyre.

Finish: Lyre and Anchor - 24 Karat Gold Electroplated, mirror-like polish and lacquered.

USN - Rhodium electroplated, mirror-like polish and lacquered.

Forcer: No forcer permitted.

Placement of attachment:

One screw post and one prong shall be required. One knurled thumb nut of 1/2 inch diameter shall be required. One clutch fastener for the prong shall be required. The screw post and nuts shall be properly sized to accommodate each other. The screw post shall be of brass material with a gold-like finish.

A screw post shall be fused (soldered or electronic fusion) to the center back of the anchor shank and fitted with a thumb-nut. A registration prong shall be fused (soldered or electronic fusion) to the top back of the anchor. The measurement between the screw post and the prong shall be 29/32 (± 1/32) inch.

Where used: U.S. Navy band and Naval Academy Band hat.

Note:
1. The lyre shall be centered and fused (soldered or electronic fusion) to the anchor shank. The "USN" shall be centered and fused (soldered or electronic fusion) to the anchor stock.
2. The insignia shall be positioned on the mount so that the upper tips of the flukes are even with the top edge of the band.
3. The figure is for information purposes only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.

4. Packaging and packing shall be standard commercial practice.

Custodian:
Navy - NU

Review Activity
DLA-CT

Preparing Activity
Navy - NU

Project No. 8455-0430

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:50Z
Check the source to verify that this is the current version before use.