MIL-S-18003D(NU)
27 June 1980
SUPERSEDING
MIL-S-18003C(SA)
28 June 1974

MILITARY SPECIFICATION

SANDAL, SUBMARINE

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a leather sandal.

1.2 Classification The sandal covered by this specification shall be of one type and of the following sizes (see 6.2):

Sizes: 6, 7, 8, 9, 10, 11 and 12

2. APPLICABLE DOCUMENTS

2.1 Issues of document The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-285	- Thread, Polyester
V-T-295	- Thread, Nylon
KK-I-570	- Insole, Footwear, Leather, Cattlehide
KK-L-165	- Leather, Cattlehide, Vegetable-Tanned and Chrome Retanned, Impregnated: and Soles
ZZ-H-141	- Heels, Rubber
DDD-L-20	- Label; For Clothing, Equipage and Tentage (General Use)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Navy Clothing & Textile Research Facility, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8430

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-17757 - Boxes, Shipping Fiberboard (Modular Sizes)

STANDARDS

FEDERAL

FED-STD-311 - Leather; Methods of Sampling and Testing
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Traffic Department, 1616 P Street, NW, Washington DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, ILL 60606.)

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3.1 Guide sample Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the samples, in which case this specification shall govern.

3.2 First article When specified (see 6.2), the contractor shall furnish sample unit(s) for First Article inspection and approval (see 4.3).

3.3 Materials

3.3.1 Straps The straps shall be made of chrome-vegetable retanned upper leather of full or corrected grain. The flesh side shall be free of excess or loose fiber. The color shall be brown approximating the color of the guide sample. The ankle strap and buckle strap shall be 7/8 (± 1/16) inch wide. The heel strap shall be 1 7/8 (± 1/16) inches wide at each end and taper to 7/8 (± 1/16) inch at the center. One forepart strap shall be uniformly 1 1/4 (± 1/16) inches wide and the other shall taper from 1 3/4 (± 1/16) inches at one end to 1 1/4 (± 1/16) inches at the other end. The straps shall gauge not less than 5 ounces in thickness when tested as specified in 4.4.

3.3.2 Outersoles The outersoles shall conform to type III, Class 3, style 1, sub-class (a) of KK-L-165, except that the finish may be full grain or corrected grain. The thickness of the leather shall be 9 (± 1/2) irons after being properly fleshed and level. As a alternate, the sole may be rubber, or a combination of rubber and synthetic rubber, non-marking and have a commercial tread design. The color maybe black or brown.

3.3.3 Innnersoles The innersoles shall conform to type I, class 1, tannage (a) or (b) of KK-I-570, except that the thickness shall gauge 5 to 6 irons and that a fungicide will not be required.

3.3.4 Heel pads The heel pads shall be of leather specified in 3.3.1, sheepskin or natural kid or calf, with a minimum of 2 1/2 and a maximum of 3 1/2 ounces in thickness. When leather specified in 3.3.1 is used, the top finish shall be removed by buffing or splitting. The heel pads shall be of sufficient size to cover all clinched heel nails and leave the Goodyear stitching exposed. The heel pads shall conform to the requirements specified herein when tested as specified in 4.3.1.

3.3.5 Heels, rubber The heels shall be black or brown and shall conform to type II, class 3, style 1 or 2 of ZZZ-H-141.

3.3.6 Shank The shank shall be made of 0.0305 to 0.0335 inch (21 gauge) ribbed steel, 5/8 inch wide and of a length proportionate to the sandal size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3.3.7 Buckle, tongue, center-bar The center-bar, tongue buckle shall be a one inch buckle made of nickel plated brass conforming to the requirements specified herein when tested as specified in 4.3.1.

3.3.8 Heel nails The heel nails shall be made of brass, cut or wire type, of a sufficient length to produce a smooth, secure clinch on the insole. The cut type nails shall be commercial number 450, 460 or 1336, with a 20-gauge point. The wire nails shall be commercial type 13 gauge, with a flat clinching point.

3.3.9 Thread

3.3.9.1 For straps The thread used for stitching the straps shall be cotton or nylon. The cotton thread shall conform to V-T-276, type IIIA, ticket No. 8/4 for the needle and type IIIB, ticket No. 8/4 for the bobbin. The needle thread shall be dark brown and the bobbin thread shall be brown or white. Colorfastness requirements shall not apply. The nylon thread shall conform to V-T-295, type I or II, class 1, size E or type III, size E. The needle thread shall be dark brown and the bobbin thread shall be brown or natural. The colorfastness requirements shall not apply.

3.3.9.2 For Goodyear stitching The thread used for the Goodyear stitching on the sole shall be cotton or polyester. The cotton thread shall conform to V-T-276, type IVA or IVB, ticket No. 8/11 for the running thread and type IVA or IVB, ticket No. 8/10 for the shuttle thread. The threads shall be white or natural in color. The polyester thread shall conform to V-T-285, type I, class 1, subclass C, size 10, 3-ply for the running thread and size 10, 3 or 6-ply for the shuttle thread. The color shall be natural.

3.3.10 Cement The cement shall be any suitable cement capable of firmly and permanently bonding the sandal component materials.

3.3.11 Marking Each sandal shall be legibly marked with the inscription indicated below. The marking shall conform to the requirements for type IV, class 9 of DDD-L-20 and shall be centered across the narrow portion of the heel strap and on the flesh side. The letters and numerals shall be a minimum of 3/16 inch high.

Example: USN
Contract No:_____

3.3.12 Size stamping Each sandal shall be legibly stamped with a appropriate size at the center of the outersole, vertically into the shank, using a 3/8 inch high numeral, with the bottom of the numeral approximately 1 inch above the heel. The use of color as a marking medium for the size stamping is prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3.4 Description The sandal design shall be of the open toe, cross strap, and open heel type with ankle strap and buckle closure (see Figure 1).

3.4.1 Figure The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Lasts and patterns The sandals shall be made on the contractor's lasts and patterns which have been approved by the contracting officer.

3.6 Stitches, seams and stitchings All seams and stitching types specified herein shall conform to FED-STD-751.

3.7 Construction The sandals shall be constructed in accordance with the contractor's patterns and construction details indicated herein. The contractor is not required to follow the exact sequence of operations as indicated, provided that the finished sandals are identical with those produced by following the exact sequence as listed. The upper stock of the sandals shall be reasonably mated in pairs for shade and texture of leather.

3.7.1 Forepart straps The two forepart straps described in 3.3.1 shall be prepared by cutting a 2 1/4 (± 1/8) inches vertical slit, parallel to the sides, in the center of the 1 1/4 inches wide strap. The 1 1/4 to 1 3/4 inches tapered width strap shall be drawn through the slit with the wider end at the forward outer edge of the sandal (see Figure 1).

3.7.2 Backpart straps The backpart straps described in 3.3.1 shall be prepared as follows:

3.7.2.1 Marking The narrow portion of the flesh side of the heel strap shall be stamped as specified in 3.3.11 (see Figure 1).

3.7.2.2 Punch holes The ankle strap shall be punched with six, 1/16 inch diameter holes, centered in the strap with the first hole 1 1/2 (± 1/8) inches from the pointed end and the remaining holes equally spaced 3/8 (± 1/16) inch from the first hole.

3.7.2.3 Ankle strap The rounded end of the ankle strap, with grain side out, shall be stitched to the grain side of the heel strap at the inner edge and reinforced by overstitching the starting point by not less than 3/8 inch (see Figure 1). Stitching shall be by 301 stitch type, LSa-1 seam type, with 10 to 12 stitches to the inch, using the thread specified in 3.3.9.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3.7.2.4 Buckle strap The buckle strap shall be slit vertically and fitted over the center bar and tongue of the buckle. Double back the strap, flesh side to flesh side. The rounded end of the doubled buckle strap shall be stitched to the grain side of the heel strap with the stitching 1/16 to 1/8 inch from the edge. Reinforce by overstitching the starting point by not less than 3/8 inch (see Figure 1). Stitching shall be by 301 stitch type, LSa-1 seam type, with 10 to 12 stitches to the inch, using the thread specified in 3.3.9.1.

3.7.3 Straps and innersole assembly The innersole specified in 3.3.3 shall be cut with slits for insertion of the forepart and backpart straps. The slits shall be spaced to provide a proper fit in each finished sandal size. The forepart and backpart straps shall be inserted through the respective slits with the ends of the straps securely fastened on the underside of the innersole by firmly cementing with suitable cement or adhesive. Ends of straps shall be joined to each other, either by means of clinching with a metal staple, or sewing the strap ends securely. Stitching, when used, shall be by 301 stitch type, LSa-1 seam type, with 10 to 12 stitches to the inch, using the thread specified in 3.3.9.1.

3.7.4 Shank fitting The ribbed steel reinforcement shank specified in 3.3.6 shall be cemented and securely fastened to the flesh side of the innersole, prior to the sole laying. The steel shank shall be of a size to be positioned 1/8 to 3/8 inch rearward of the ball line and extend a minimum of 3/8 inch rearward of the heel breast.

3.7.5 Sole laying The outersole and innersole shall be cemented together, flesh side to flesh side. Sufficient pressure shall be applied to obtain a proper bond prior to stitching. The outersole and innersole shall then be stitched together leaving an adequate margin to provide for a finished edge. Stitching shall be by 301 stitch type, SSa-1 seam type, with 6 to 8 stitches to the inch, using the thread specified in 3.3.9.2 that has been hot waxed.

3.7.6 Heel attaching and finishing The heel specified in 3.3.5 shall be cemented firmly to the outersole prior to nailing. The heel shall be attached with 7 nails, with the forward nails located 1/8 (± 1/32) inch inside the insole strap slits and the other 5 nails spaced beyond the strap. Each nail shall be of a length to insure a secure flat clinch on the insole. Care shall be taken that the heeling machine is equipped with proper length drivers to drive the heel nails firmly and evenly against the washers so that the nail heads sink below the rubber surface and are not visible, with the nails clinching on the insole and the clinching covered with a heel pad as specified in 3.3.4. The nails shall not interfere with or damage the straps. The heel and outersole-innersole edges at the heel end of the sandal shall be trimmed and scoured, and the leather portion of the heel shall be stained and finished smooth and bright to match the edge in color.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3.7.7 Edge making and finishing Outersole, and innersole edges, shall be trimmed square all around with proper margins; stained the approximate color of the straps and set smooth and bright on an edge setting machine.

3.7.8 Attaching the heel pad The heel pad specified in 3.3.4 shall be cemented solid to the heel seat. The grain side of the heel pad shall finish on the outside. The pad shall securely cover all clinched nails and shall not cover any of the Goodyear stitching.

3.7.9 Finish Thread ends shall be properly trimmed. Accumulated dirt, wax, cement and other foreign matter shall be cleaned and removed from the surface. Nails or unclinched nails that have been left protruding through the insole and cannot be pulled out shall be cut close to the surface leaving no protruding stumps.

3.8 Workmanship The finished sandals shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to cetermine the validity of the certification.

*4.2 Classification of inspection The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3)
2. Quality Conformance Inspection (see 4.4).

4.3 First article inspection When required, the first article submitted in accordance with 3.2 shall be inspected for compliance with design, construction, workmanship, appearance, and dimensional requirements as specified in 4.4.3.1 and 4.4.3.2.

4.4 Quality conformance inspection Inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

4.4.1 Component and material inspection In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, components and materials listed in Table I and below, shall be tested for the characteristics specified and in accordance with the referenced test methods unless otherwise specified. The unit of product for lot formation and testing shall be as shown below. The lot shall be unacceptable if one or more units fail to meet any requirement specified. All test report shall contain the individual values utilized in expressing the final result.

Component	Lot size expressed as	Sample unit for testing
Leather, strap	side	5, 4x4 inch specimens (one from each of 5 sides)
Leather, heel pad	heel pad	6 heel pads
Steel shank	shank	1 shank
Buckle, center bar, tongue	buckle	3 buckles
Nails	ounces	1 ounce of each type as applicable

The sample size (number of units of product) shall be as shown below:

Lot size	Sample size
800 or less	2
801 to 22,000	3
22,001 and up	5

Table I - Instructions for component testing

Component	Characteristics	Requirement paragraph	Test method
Leather, strap	Material identification	3.3.1	1/
	Color	3.3.1	Visual 2/
	Thickness	3.3.1	1011 of FED-STD-311
Leather, heel pad	Material identification	3.3.4	1/
	Thickness	3.3.4	1011 of FED-STD-311
Steel, shank	Material identification	3.3.6	1/
	Thickness	3.3.6	Micrometer 3/
	Width	3.3.6	Rule
Buckle, center bar	Material identification	3.3.7	1/
Nails, heel	Material identification	3.3.8	1/
	Gauge of point	3.3.8	4/

1/ A certificate of compliance shall be submitted for this requirement.
2/ Results shall be reported as Pass or Fail.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

3/ Results shall be reported to the nearest 0.001 inch.
4/ Nail points shall be gauged with an English standard wire gauge in which 20 gauge is 0.035 (± 0.005) inch, with the points of the nails entering the gauge at least 1/32 inch.

4.4.2 In-process inspection Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are carried out as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection had indicated nonconformance.

4.4.3 Examination of the end item Examination of the end item shall be in accordance with 4.4.3.1 and 4.4.3.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.4.3.3. The sample unit shall be one sandal and the selection shall be by pairs. For the pairing examination, the pair shall be examined together with each defect found per pair scored as a single defect.

4.4.3.1 Visual examination The sandals shall be examined for defects classified in accordance with the list below:

Examine	Defect	Classification Major	Classification Minor
Pairing	Not properly mated, i.e., not right and left of same size or wide variation in color or appearance	X	
Cleanness	Any spot or stain clearly noticeable		X
Color and finish	Not specified color	X	
	Color of straps not uniform		X
	Finish streaky, chipped or flaky		X
	Sole edges or heels not bright or not finished as specified		X
Design type and size	Not as specified	X	
Material (General)	Any component not fabricated of material specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Strap, leather	One or more of the following imperfections: Boney, loose, pipey, or otherwise inferior leather over major portion of strap	X	
	Stretch strap	X	
	Excess or loose fiber on flesh side		X
Construction and Workmanship	Any cut, tear, hole, rip, repair or abrasion	X	
	Any component omitted, misplaced, damaged or otherwise defective	X	
	Any required operation omitted or improperly performed	X	
Seams and stitching for straps	Loose tension resulting in a loosely secured seam	X	
	Tight tension resulting in puckering or cutting of leather	X	
	Not overstitched at least 3/8 inch	X	
	Wrong stitch or seam type	X	
	More or less than the required number of stitches per inch	X	
	Thread ends not trimmed		X
	Needle holes or needle chew		X
	Skipped, run-off or broken stitches	X	
Outsole stitching	Less than five stitches per inch	X	
	Less than six but not less than five stitches per inch or more than eight stitches per inch		X
	One skipped or broken stitch		X
	Two or more skipped or broken stitches	X	
	Stitch locks laying on surface a distance of more than one inch	X	
	Stitch locks laying on surface but not exceeding a distance of one inch		X
Edge making	Edge trimmed into stitching	X	
	Edge not trimmed square or trimming is irregular		X
	Edges not set	X	
	Edges not properly set, e.g., chatter marks, etc.		X
	Checked sole, i.e., separation between outsole and insole	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Heel finishing and attaching	Heel not finished square or not properly trimmed, i.e., is pronouncedly flared or tapered		X
	Any separation of heel from outsole	X	
	Heel not finished smooth		X
	Crooked or wrong size heel		X
	Any heel nail missing		X
	Nails not sunk below rubber		X
	More than two center back nails not clinched on the insole	X	
	More than one of center back nails not clinched on the insole		X
	Any corner breast nail not clinched on insole	X	
	More than one nail other than corner breast or three center back nails not clinched on insole	X	
Slits (forepart strap)	Location of slit on the 1 1/4 inch wide strap not as specified	X	
	Slit, less than 2 1/8 but not less than 2 inches, or more than 2 3/8 but not more than 2 1/2 inches		X
	Slit, less than 2 inches or more than 2 1/2 inches	X	
Punch holes (ankle strap)	Location, spacing or number of holes not as specified		X
Insole	Short by 1/8 inch or more	X	
	Short by 1/16 inch but less than 1/8 inch		X
	Any protruding tack or nail	X	
Marking and size stamping	Omitted, misplaced, incorrect or illegible		X

4.4.3.2 Dimensional examination The sandals shall be examined for dimensional defects. Any measurement deviating from the dimensions and tolerances specified shall be scored as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

4.4.3.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units for visual and dimensional examinations shall be as follows:

	Inspection level	AQL
For defects applicable to 4.4.3.1:		
Major	II	2.5
Major and Minor (Combined)	II	6.5
For defects applicable to 4.4.3.2:		
One Class	S-3	4.0

4.4.4 Examination of packaging requirements An examination shall be made to determine that packaging, packing, and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling; bulging or distortion of container.
Content	Number of sandals per shipping container is more or less than specified.

5. PACKAGING

5.1 Packaging Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A Each pair of sandals shall be placed heel to toe with the uppers together and in such a manner that the length of each pair shall measure approximately 15 inches. Each pair of sandals shall be securely tied with cotton tape, twine or an elastic band.

5.1.2 Level C (commercial packaging) Sandals shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

5.2 Packing Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A Sixteen (16) pairs of sandals, of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to type CF, class weather-resistant, variety SW, grade V3c, size 2A of MIL-B-17757. Each shipping container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of MIL-B-17757. Closure and reinforcement requirements shall be as specified in the appendix of MIL-B-17757. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same shipping container.

5.2.2 Level B Sixteen (16) pairs of sandals, of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety SW, grade 275, size 2A of MIL-B-17757. Each shipping container shall be fitted with a taped liner conforming to type CF, class domestic, variety SW, grade 200 of MIL-B-17757. Closure and reinforcement requirements shall be as specified in the appendix of MIL-B-17757. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same shipping container.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

5.2.3 Level C (Commercial packing) Sandals, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 4 by 5 inches, with the words "MIXED SIZES" plainly printed or stamped thereon and under those words shall be legibly printed or stamped the correct quantity and size contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use The sandal covered by this specification is intended for use by male personnel aboard submarines.

6.2 Ordering data Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Sizes required (see 1.2).
c. First article requirements (see 3.2).
d. Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).


6.3 Samples For access to samples, address the procuring activity issuing the invitation for bids.

Custodian:
Navy - NU


Preparing Activity:
Navy - NU

Project No. 8430-N241.


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

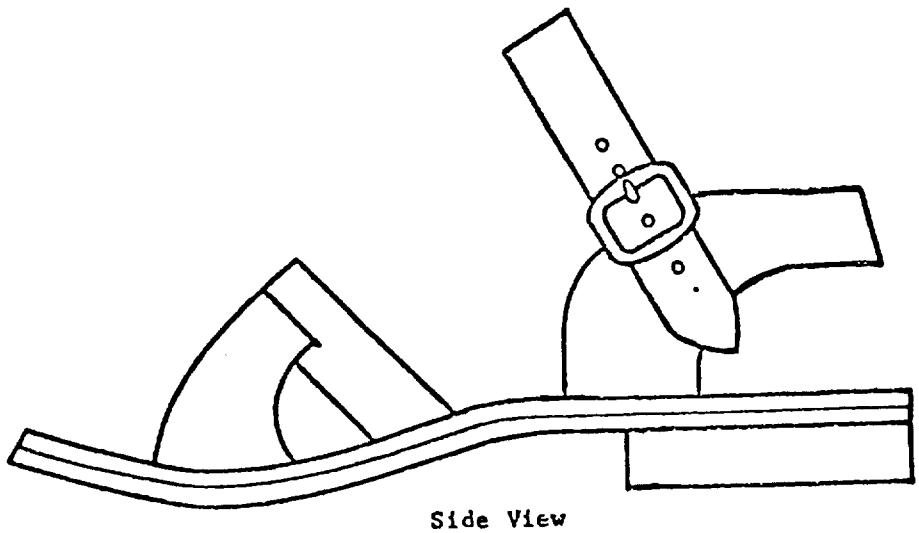


Side View

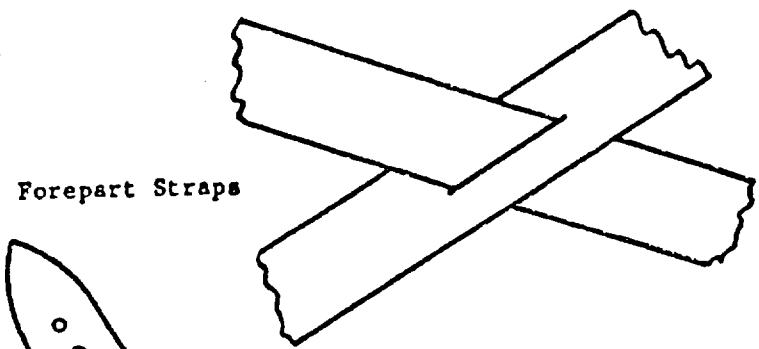

Forepart Straps

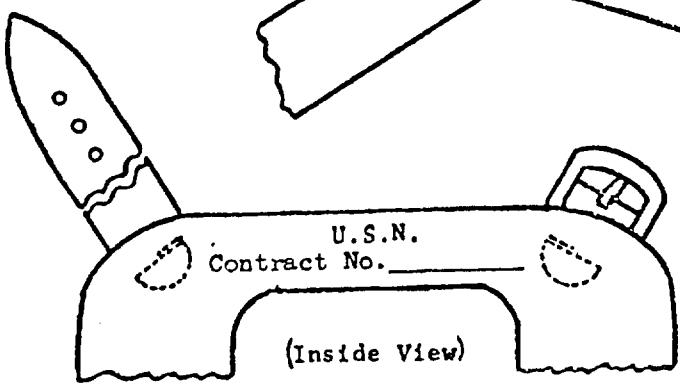

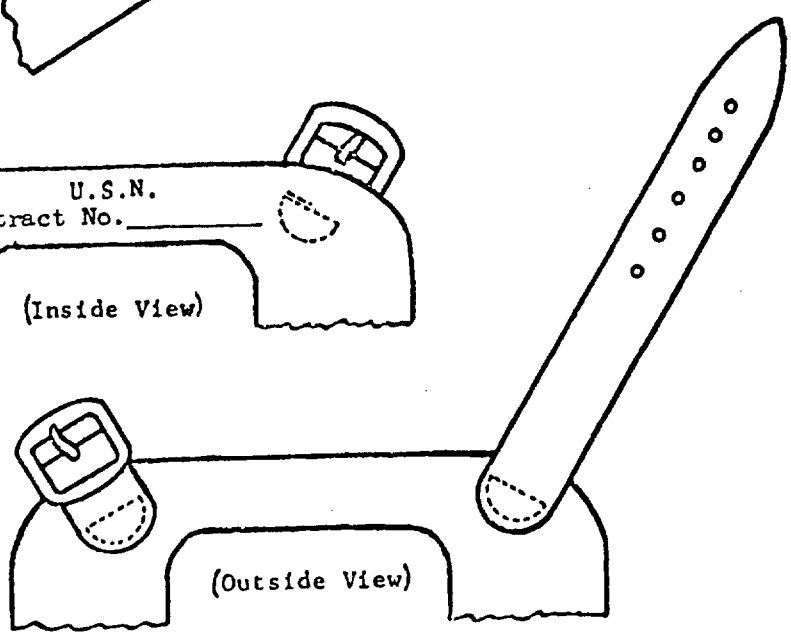

Buckle, Ankle and Heel Straps

Figure 1.--SANDAL, SUBMARINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-18003D(NU) Sandal, Submarine

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.

FOLD

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

U.S. MAIL

OFFICER IN CHARGE
NAVY CLOTHING & TEXTILE RESEARCH FACILITY
21 STRATHMORE ROAD
NATICK, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:52Z
Check the source to verify that this is the current version before use.