
MILITARY SPECIFICATION SHEET

SWITCH, ROTARY, OPEN CONSTRUCTION, 1/2 AMPERE, STYLE SR12

© INACTIVE FOR NEW DESIGN AFTER 10 December 1981.

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the switch described herein shall consist of this specification and the latest issue of Specification MIL-S-3786.

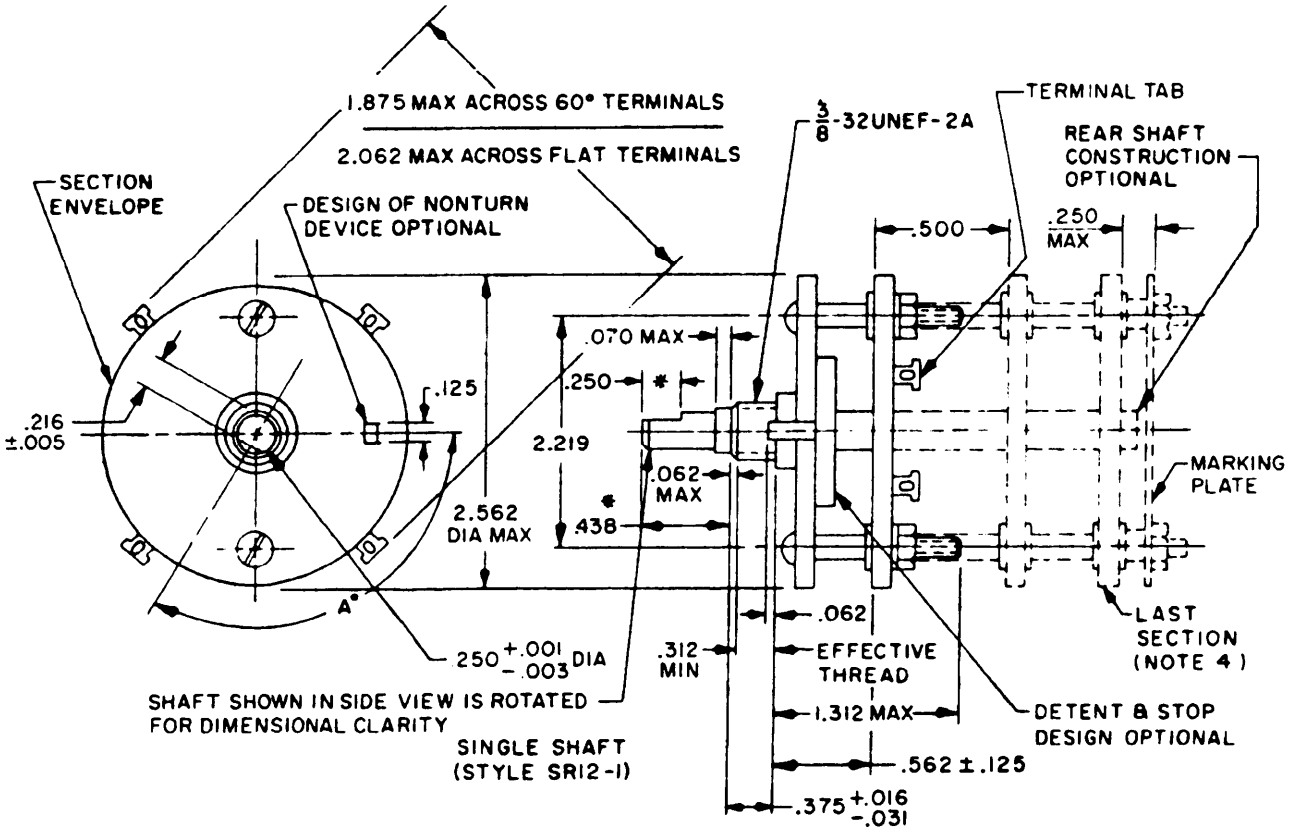

© denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:35Z
Check the source to verify that this is the current version before use.

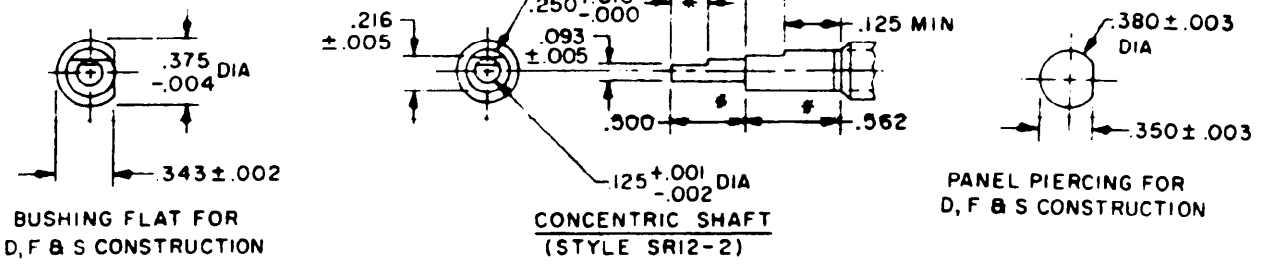

BUSHING FLAT FOR D, F & S CONSTRUCTION

CONCENTRIC SHAFT (STYLE SRI2-2)

PANEL PIERCING FOR D, F & S CONSTRUCTION

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.093	2.36	.438	11.13
.002	.05	.125	3.18	.500	12.70
.003	.08	.216	5.49	.562	14.27
.005	.13	.250	6.35	1.312	33.32
.010	.25	.343	8.71	1.734	44.04
.016	.41	.350	8.89	1.875	47.63
.031	.79	.355	9.02	2.062	52.37
.062	1.57	.375	9.53	2.219	56.36
.070	1.78	.380	9.65	2.562	65.07

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.015 (.38 mm).
4. The number of sections is optional.
5. Nonturn device as shown is not applicable to S construction switches.
6. Shaft-flat angle A° is the angle between a line through the center of the shaft and center of the nonturn device, and another line through the center of the shaft and perpendicular to the shaft flat.
7. Shaft shown in maximum counterclockwise position for switches with stop and with switch in position No. 1 for switches without stop.
*8. For allowable variations, see MIL-S-3786 ordering data.
9. Front plate design optional provided it falls within the maximum O.D. of the section dimension referenced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Angle of throw: 12.85° and 25.7°.

Terminals: The terminal tabs shall be bent at an angle of 75 ±15 degrees from the plane of the section. When flat terminals are required, the dimensions shall be as shown on figure.

Rotational torque: The minimum and maximum values of torque determined for shaft rotation shall be within the limits specified in table I.

Enclosure design: N or S.

TABLE I. Rotational-torque limits.

Temperature	Torque (lb-in)	
	Minimum	Maximum
Room	2	6
Minimum	2	8

Life (rotational): The test loads for the applicable circuit conditions shall be as specified in table II. Each of the loads, specified for the applicable environmental condition, shall be switched by at least one rotor contact of the switch.

TABLE II. Electrical loads.

Environmental condition	Inductive load (2.8 Henries)		Resistive loads	
	Milliamperes	Volts, dc	Milliamperes	Volts
At atmospheric pressure	50	28	500 250 50	28 dc 115 vrms 300 vrms
At reduced barometric pressure	---	---	350 100	28 dc 115 vrms

Dielectric withstanding voltage: The applicable test voltage specified in table III shall be applied between the general switch elements.

TABLE III. Dielectric-test voltages.

Altitude	Test voltage
	(Volts, rms)
At atmospheric pressure	1,000
At reduced barometric pressure	400

Contact resistance: For switches of life-temperature characteristics A, C, and E, the contact resistance at room temperature shall not exceed the following values:

Initial and after vibration and shock - - - - 20 milliohms.
After moisture resistance and salt spray - - - - 30 milliohms.
After initial soak and completion of life test - - - - 40 milliohms.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:35Z
Check the source to verify that this is the currentversion before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC, AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV, SM
Navy - MC, CG
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5930-1181-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-3786/12C

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:35Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:35Z
Check the source to verify that this is the current version before use.