MILITARY SPECIFICATION SHEET
RING, LOCK, SERRATED, METRIC

The complete requirements for procuring the ring described herein shall consist of this document and the latest issue of specification DOD-I-63276.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.


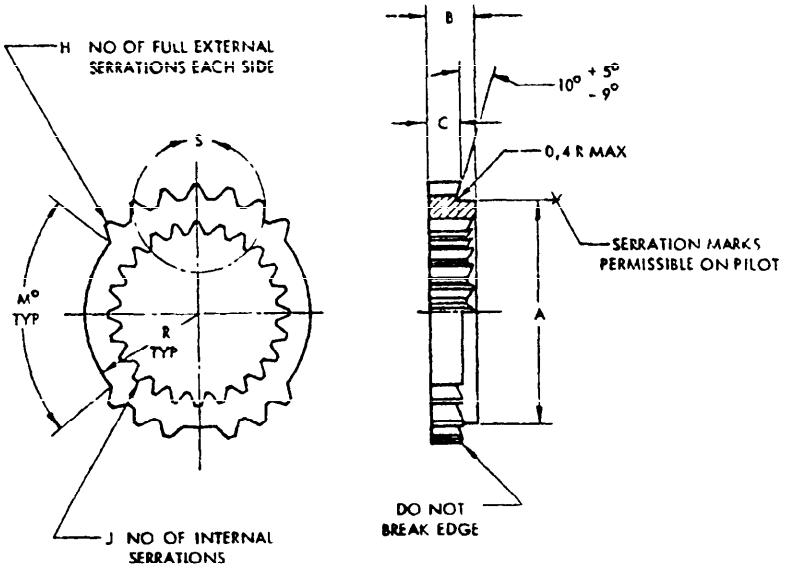


FIGURE 1. Ring, lock, details



VIEW S ENLARGED

NO SPECIFIC ANGULARITY EXISTS BETWEEN INTERNAL AND EXTERNAL SERRATIONS. THE SERRATED SECTORS WILL BE LOCATED DIAMETRICALLY OPPOSITE.

TABLE I. Port dimensions

DASH NUMBERS		A DIA	B	C	D DIA	E DIA	F DIA	G DIA	H	J	K°	L°	M°	R	MASS kg/1000 PCS
CARBON STEEL	A-286 CRES	0 -0,2	0 -0,3	0 -0,3	+0,2 0	MAX	+0,2 0	MIN			+1° -2°	± 2°	APPROX	+0,2 0	(NOTE 9) APPROX
1	1C	7,79	2,15	1,15	9,48	8,66	5,32	6,10	4	13	102°	99°	85°	4,13	0,34
2	2C	9,12	2,35	1,25	10,62	9,78	6,62	7,50	4	17	86°	98°	90°	4,69	0,55
3	3C	11,03	3,35	2,05	12,78	11,91	8,60	9,50	6	17	99°	97°	78°	5,75	1,04
4	4C	13,11	4,05	2,55	14,63	13,79	10,66	11,66	6	21	97°	96°	93°	6,70	1,35
5	5C	14,88	4,65	3,25	16,72	15,72	12,30	13,26	6	24	96°	96°	86°	7,66	2,00
6	6C	18,57	4,65	3,25	20,80	19,71	14,50	15,50	8	26	111°	95°	81°	9,66	4,15
7	7C	20,95	4,65	3,25	22,82	21,79	17,25	18,52	8	28	96°	94°	93°	10,70	3,80

5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:31Z
Check the source to verify that this is the current version before use.

NOTES:

1. MATERIAL: Steel, carbon, composition C1117, in accordance with Federal Standard Number 66.
Steel, corrosion resistant, A-286 per AMS 5734, heat treated and aged.

2. PROTECTIVE COATING: Steel, carbon, shall be cadmium plated in accordance with QQ-P-416, type II, class 3.
Steel, corrosion resistant, shall be passivated in accordance with QQ-P-35.

3. SURFACE ROUGHNESS: Machined surfaces to be 3.2 micrometres in accordance with ISO recommendation R 468, except serrations.

4. HARDNESS: Rings of carbon steel shall be case hardened to RC 36-45 in accordance with procurement specification.
Rings of corrosion resistant steel shall be hardened to Brinell 269 min in accordance with procurement specification.

5. FILLETS: Fillets shall be 0.4 R maximum.

6. EDGES: Edges broken 0.1 - 0.4 unless otherwise specified.

7. DIMENSIONS: Dimensions in millimetres; to be met after plating.

8. PART NUMBERS: The part number consists of the letter D, plus the basic number of the specification sheet, plus the dash number.

Example: D63276/2-2 Lockring, Carbon Steel
D63276/2-2C Lockring, Cres

9. Values for mass have been calculated with a density of 7.95 kg/dm^3.

10. Referenced documents shall be of the issue in effect on date of invitations for bid.

11. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

Custodians:
Army - WC
Navy - OS
Air Force - 99

Reviewer Activities:
Army - AT, AV, MI
DSA - IS

Preparing Activity:
Army - WC

Project No. 5340-2011

User Activities:
Army - EL,GL
Navy - YD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:31Z
Check the source to verify that this is the current version before use.