MIL-C-48411/13A(MU)
1 December 1975
SUPERSEDING
MIL-C-48411/13(MU)
25 April 1974

MILITARY SPECIFICATION

CIRCUIT CARD ASSEMBLY: 11746260 COMPUTER-4

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the detail requirement for one type of circuit card assembly. The requirements of this specification together with the general requirements of specification MIL-C-48411 comprise the complete requirements for Computer-4.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-C-48411	Circuit Card Assemblies, General Specification for

DRAWINGS

11746260	Circuit Card Assembly, Computer-4.

(Copies of specifications, standards, drawings, and publications required by supplier in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Item Definition.- This assembly is the forth of six (6) single ended printed circuit boards consisting of operational amplifiers and dividers necessary to provide mathematical manipulation of the various parameters for the generation of computer flight patterns.

3.1.1 Major component list.- The components of this assembly shall be as specified on the Engineering Parts List (EPL) 11746260.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:25Z
Check the source to verify that this is the current version before use.

3.2 Characteristics.

3.2.1 Performance.- The performance requirements specified herein shall be met on every assembly at standard ambient conditions prior to Government acceptance.

3.2.1.1 Power Supply.- The requirements of 3.2 shall be met with the following power supply voltages.

a. +15 VDC
b. -15 VDC
c. +10 VDC Variable
d. +15 VDC Variable

3.2.1.2 Divider Network.- The divider network shall be capable of analog division of divider inputs or operational amplified outputs of between 10mV and 10 VDC.

3.2.2 Environmental.- The assembly shall meet the environmental requirements of specification MIL-C-48411.

3.2.3 Physical Characteristics.- The physical characteristics shall be as specified on drawing 11746260 and the engineering parts list.

3.3 Design and Construction.

3.3.1 Production Drawings.- This assembly shall be fabricated in accordance with the requirements of specification MIL-C-48411, Drawing 11746260 and associated lists.

3.3.2 Standard of Manufacture.- The standard of manufacture shall be those specified in specification MIL-C-48411.

3.3.3 Workmanship.- The workmanship shall be as specified in specification MIL-C-48411.

3.3.4 Preproduction sample.- Preproduction sampling shall be as specified in specification MIL-C-48411.

4. QUALITY ASSURANCE PROVISIONS

4.1 General.

4.1.1 Responsibility for inspection.- The responsibility for inspection shall be as specified in specification MIL-C-48411.

4.1.2 Special test and examination.- The assembly shall be inspected and tested in accordance with 4.2 of specification MIL-C-48411.

4.2.1 Test equipment.- (See Figure 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:25Z
Check the source to verify that this is the current version before use.

TABLE I

	INPUT (VDC±1MV)					OUTPUT									
						VDC±0.05VDC		VDC±0.10VDC				VDC±0.20VDC			
PINS	23	25	18	39	36	6	16	28	27	30	38	3	21	22	24
	-10.0	0.0	+10.0	+10.0	-10.0	10.00	3.44	10.00	4.54	-3.75	10.00	3.75	10.00	4.65	2.43
	+ 5.0	-5.0	+8.0	+5.0	1.0	6.25	--	+1.85	--	-0.71	-1.00	+0.86	+2.00	--	--
	0.0	1.0	+3.0	+1.0	0.5	3.33	--	-1.37	--	0.51	0.50	1.70	5.00	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:25Z
Check the source to verify that this is the current version before use.

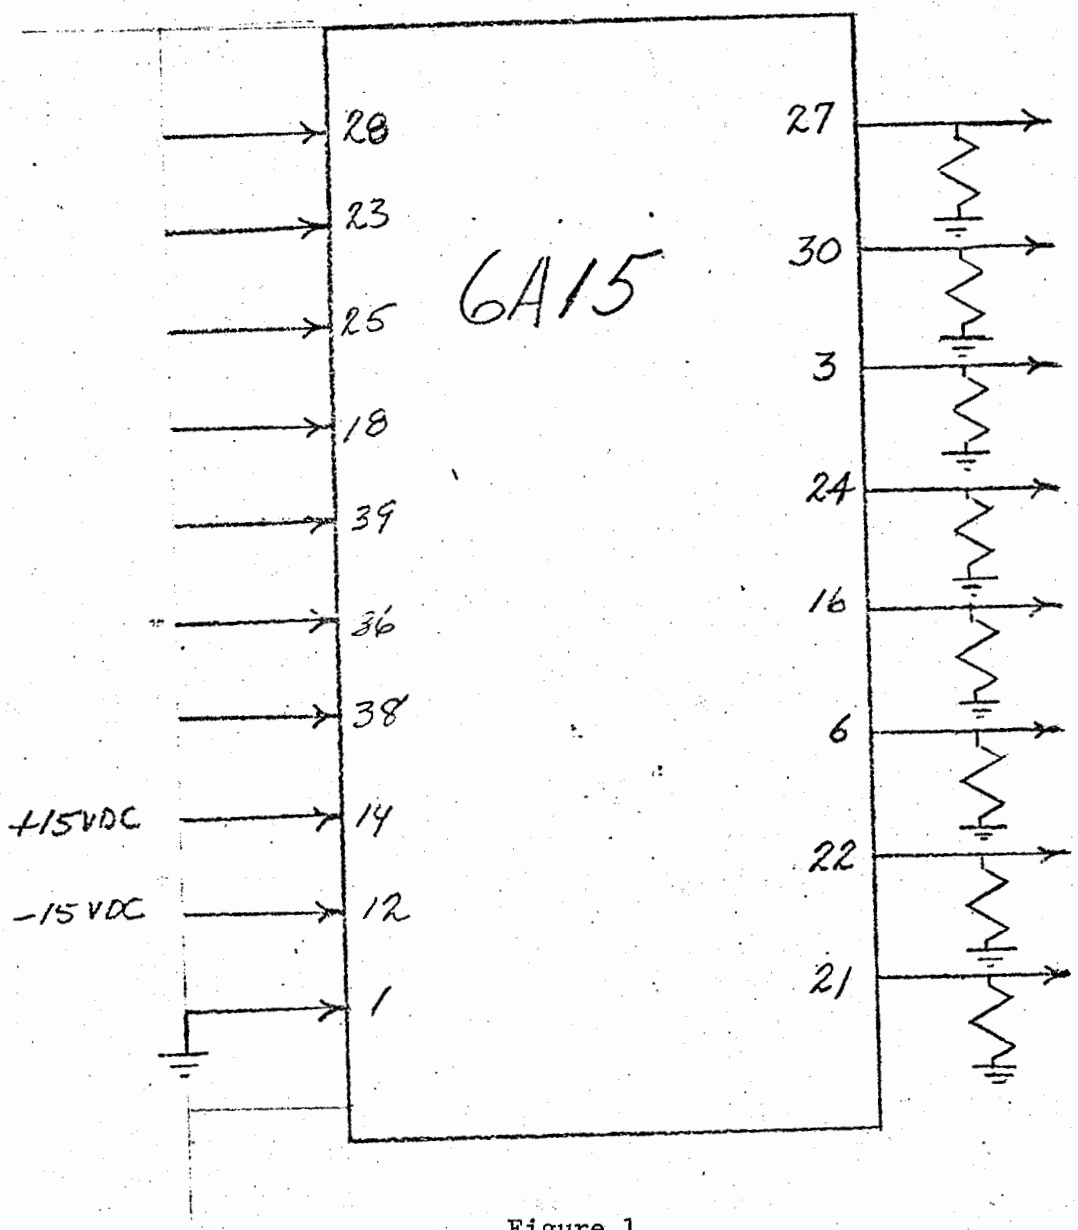


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:25Z
Check the source to verify that this is the current version before use.

4.2.1.1 Power Supply (PS 1 & PS 2).- The power supply shall be 15 ± 0.5 VDC, 100 mA or greater and a ripple of less than 10 mV RMS.

4.2.1.2 Power Supply (PS3).- The power supply shall be 10 ± 0.001 VDC, 100 mA or greater and a ripple of less than 10 mV RMS.

4.2.1.3 Power Supply (PS4).- The power supply shall be 15 ± 0.001 VDC, 100 mA or greater and a ripple of less than 10 mV RMS.

4.2.1.4 Dummy Loads.- The dummy loads shall be 10K ohm ± 0.1%, ½ watt resistors.

4.2.1.5 Digital Voltmeter.- The digital voltmeter shall have a voltage accuracy and resolution of 0.1 percent or better from zero to 100 VDC. Input inpedance of 10 megohms or greater on all voltage scales.

4.2.2 Performance.- Unless otherwise specified, the performance tests specified herein shall be satisfactorily met at standard ambient conditions. Standard ambient conditions for the purpose of these tests shall be defined as:

a. Temperature between 60°F and 90°F.
b. Barometric pressure between 28 and 32 inches of mercury.
c. Relative Humidity (RH) up to 90%.

4.2.2.1 Power Supply.- All the requirements shall be met with the following power supply voltages.

a. +15 ± 0.05 VDC
b. -15 ± 0.05 VDC
c. 0 to 10 ± 0.001 VDC
d. 0 to 15 ± 0.001 VDC

4.2.2.3 Test Set-Up.- The test of the circuit card assembly shall be performed with the inputs and outputs as diagrammed in Figure 1 unless otherwise specified.

4.2.2.4 Divider Network.- When DC voltages are applied to the input pins of the network, the corresponding output shall be as shown in Table I.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging and marking shall be in accordance with the requirements of Packaging Data Sheet (PDS), AMC Form 1029, 11746260.

6. NOTES

6.1 The notes specified in the general specification MIL-C-48411 are applicable to this specification.

Custodian

Army - MU

Preparing Activity:

Army - MU

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:25Z
Check the source to verify that this is the current version before use.

Project No. 1240-A608