MIL-P-60504A(MU)
AMENDMENT 4
31 March 1972
SUPERSEDING
AMENDMENT 3
15 January 1972

MILITARY SPECIFICATION

PRINTED CIRCUIT BOARD ASSEMBLY Q-SWITCH TIMING CIRCUIT: 10541270

This amendment forms a part of Military Specification MIL-P-60504A(MU), dated 18 June 1970.

Paragraph 2.1: Add Military Specification "MIL-P-46843 - Printed Circuit Assemblies, Design and Production of".

Paragraph 3.3: Add "and MIL-P-46843".

Paragraph 3.3.1: Add after MIL-F-13926 "and MIL-P-46843".

Paragraph 3.3.1.6.- Delete first sentence.

Paragraph 3.3.1.11.1 line 3, delete "The R12".

* Paragraph 3.5.3.- Change 350 milliamperes to 550 milliamperes.

* Paragraph 3.5.4.- Change first sentence "The assembly shall supply a regulated 17.5 ± 0.25 VOLTS "TO READ". The assembly shall supply a steady state regulated 18.5 ± 2.5 VOLTS "In the last line change 300 ± 10ma to 330 ± 50 ma.

* Paragraph 3.5.7(b) Change 9.25 ± 0.25V to 10 ± 1V.

Paragraph 4.4.1, Table III, No. 303: Add "MIL-P-46843".

* Paragraph 4.5.3(4) Change 300 milliamperes to 550 milliamperes.

* Paragraph 4.6.2.1 Change "Figure 3-1" to "Figure 2".

* Paragraph 4.6.1.3: In the second sentence delete and substitute the following: "The test shall be performed as specified in Procedure I of MIL-F-13926 except the shock pulse shall comply with the wave form, time duration and peak "G" value specified in 3.4.3."

* Paragraph 4.6.2.5 Change 350 milliamperes to 550 milliamperes.

* Sheet 14 Figure 1; Delete and substitute New Figure 1.

FSC 1240

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

* Sheet 15 Figure 2 and 3; Delete and substitute New Figure 2 and 3.

* The outside margins have been marked to indicate where additions to the previous amendment have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in this notation. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notation and relationship to the last previous adment.

Custodian:


Army - MU

Preparing activity:

Army - MU

Project No. 1240-A351

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

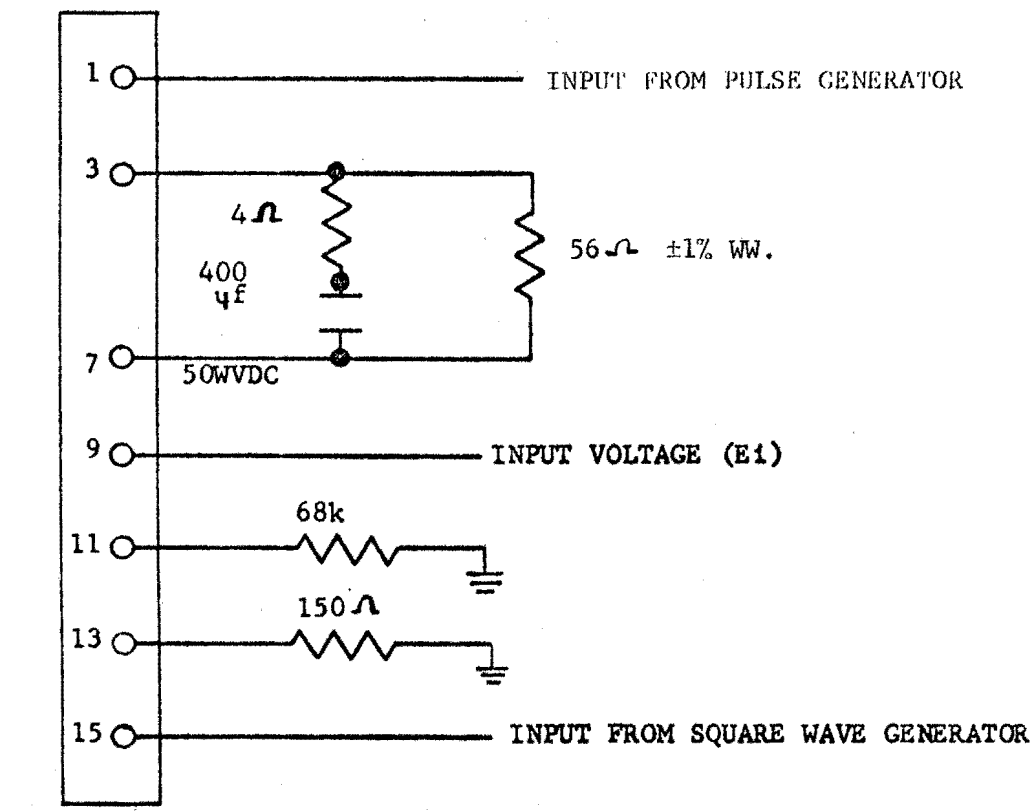

NOTE 1. ALL EVEN NUMBERED PINS ARE SYSTEM GROUND.

2. RESISTORS 1/4 WATT, RESISTANCE TOLERANCE ±5% UNLESS OTHERWISE SPECIFIED.

3. TOLERANCE ON CAPACITORS ±10%.

FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.

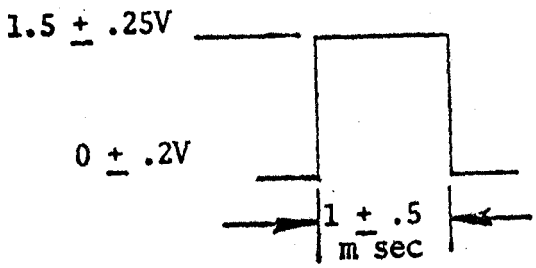


FIGURE 2

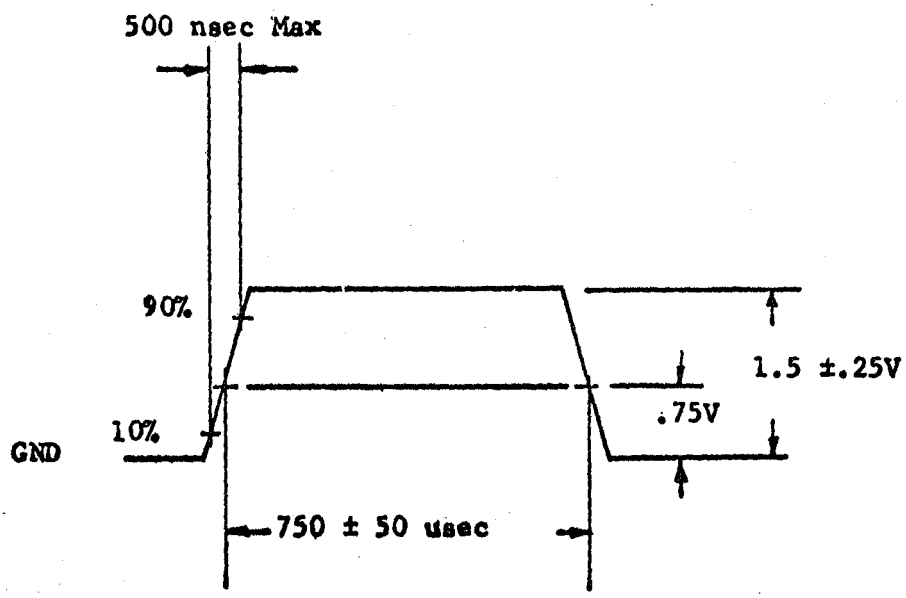


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:39Z
Check the source to verify that this is the current version before use.