MILITARY SPECIFICATION

SPLICES, CONDUCTOR, STYLE LP04

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for style LP04 conductor splices.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-T-55156 — Terminals, Lug; Splices, Conductor; Screw Type, General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with Specification MIL-T-55156, and as specified herein.

3.2 **Design and construction.** Conductor splices shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 *Conductor accommodations.* Conductor accommodations shall be designed for attaching conductors in line contact with their axes parallel.

3.3 **Voltage drop.** The voltage drop shall be as specified on figure 1, as applicable.


3.4 **Tensile strength.** The tensile strength shall be as specified on figure 1, as applicable.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with Specification MIL-T-55156.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

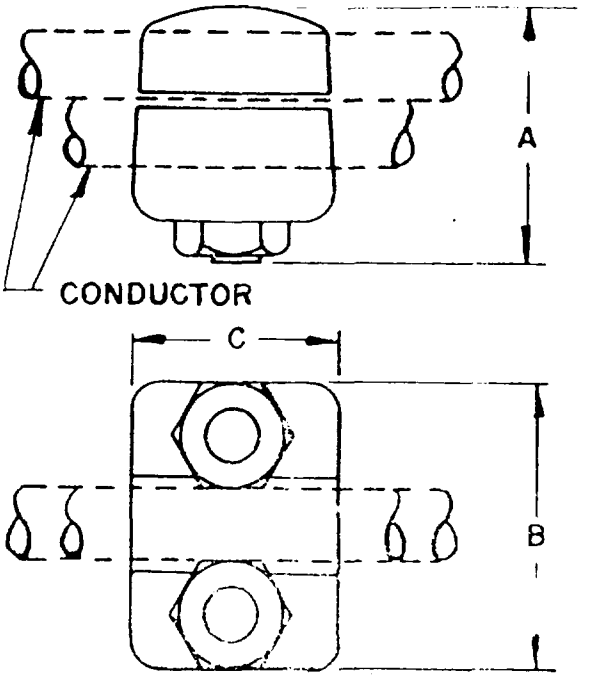

Item No.	Terminal size	Dimensions			Rated current	Voltage drop	Tensile strength
		A (max)	B (max)	C (max)	*Amperes, max*	*Volt, max*	*Pounds, min*
1	14	1/8	5/8	5/8	29	0.021	85
2	12–10	1 1/16	3/4	5/8	60	0.021	115
3	9	1 1/16	3/4	5/8	84	0.021	145
4	8	1 1/16	3/4	3/4	107	0.021	180
5	6	1 5/16	7/8	3/4	129	0.021	220
6	5	1 5/16	7/8	3/4	150	0.021	260
7	4	1 3/8	1	7/8	172	0.021	325
8	3	1 7/8	1 1/8	1/8	196	0.021	400
9	2	1 7/8	1 1/8	1/8	230	0.021	400
10	1	1 7/8	1 1/8	1/8	270	0.021	400
11	0	2 1/16	1 5/8	1 3/8	314	0.021	450
12	00	2 3/16	1 5/8	1 3/8	365	0.021	450
13	000	2 7/16	1 3/4	1 1/2	423	0.020	450
14	0000	2 5/8	2 5/16	1 5/8	495	0.020	500
15	350 MCM	2 5/8	2 5/16	1 5/8	670	0.020	500
16	400 MCM	3 3/8	2 1/2	1 7/8	672	0.020	550
17	500 MCM	3 3/8	2 1/2	1 7/8	780	0.020	550
18	650 MCM	3 3/8	2 7/8	1 7/8	913	0.020	550
19	800 MCM	4 3/8	2 7/8	2 3/8	1,080	0.020	600
20	1,000 MCM	4 3/8	3 3/8	2 5/8	1,254	0.020	600
21	1,600 MCM	4 1/2	3 1/2	2 7/8	1,636	0.020	600

1. All dimensions in inches.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing proceses.

FIGURE 1. *Style LP04 conductor splices.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL–T–55156.

6. NOTES

6.1 The notes specified in Specification MIL–T–55156 are applicable to this specification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—SigC
Navy—Ships
Air Force

Preparing activity:
Army—SigC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.