MIL-T-55164/2E
28 January 1987
SUPERSEDING
MIL-T-55164/2D
15 December 1983

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER,

SCREW TYPE, CLASS 38TB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminal boards described herein shall consist of this document and the latest issue of Specification MIL-T-55164.

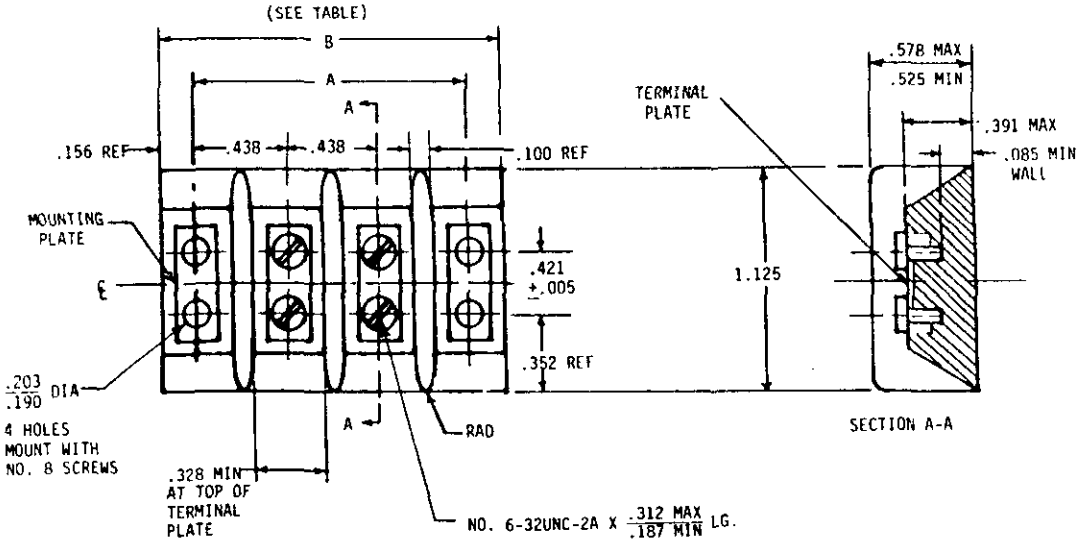


Figure 1 Terminal Board.

INCHES	MM	INCHES	MM
.005	0.13	.328	8.33
.085	2.16	.352	8.94
.100	2.54	.391	9.93
.156	3.96	.421	10.69
.187	4.75	.438	11.13
.190	4.83	.525	13.34
.203	5.16	.578	14.68
.250	6.35	1.125	28.58

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

TABLE I Dimensions.

Terminal Board Type Designation 2/	Dimensions 1/			
	A		B	
	inches	(mm)	inches	(mm)
38TB2_	1.312	(33.32)	1.641	(41.68)
38TB3_	1.750	(44.45)	2.078	(52.78)
38TB4_	2.188	(55.58)	2.516	(63.91)
38TB5_	2.625	(66.68)	2.953	(75.01)
38TB6_	3.062	(77.77)	3.391	(86.13)
38TB7_	3.500	(88.90)	3.828	(97.23)
38TB8_	3.953	(100.41)	4.266	(108.36)
38TB9_	4.391	(111.53)	4.703	(119.46)
38TB10_	4.828	(122.63)	5.141	(130.58)
3/ 38TB11_	5.266	(133.76)	5.594	(142.09)
38TB12_	5.703	(144.86)	6.031	(153.19)
3/ 38TB13_	6.141	(155.98)	6.469	(164.31)
38TB14_	6.578	(167.08)	6.906	(175.41)
3/ 38TB15_	7.016	(178.21)	7.344	(186.54)
38TB16_	7.453	(189.31)	7.781	(197.64)
3/ 38TB17_	7.891	(200.43)	8.219	(208.76)
38TB18_	8.328	(211.53)	8.656	(219.86)
3/ 38TB19_	8.781	(223.04)	9.109	(231.37)
38TB20_	9.219	(234.16)	9.547	(242.49)
3/ 38TB21_	9.656	(245.26)	9.984	(253.59)
3/ 38TB22_	10.094	(256.39)	10.422	(264.72)
3/ 38TB23_	10.531	(267.49)	10.859	(275.82)

1/ Tolerances on terminal boards up to and including 6 inches in length:

for A dimension: +.031, -.016
for B dimension: +.031, -.062

Over 6 inches in length:

for A dimension: +.047, -.031
for B dimension: +.047, -.062

These tolerances are not meant to affect the nominal .438 inch dimension between terminal rows. The nominal .438 inch dimension shall be maintained to permit use of such auxiliary hardware as fanning strips, identification plates, etc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

2/ Add letter B, F or H for temperature range to complete type designation.

3/ Not to be used for new design.

REQUIREMENTS

Terminal Board:

Dimension and Configuration: See Figure 1 and Table I.
Voltage rating (maximum): 600 volts.
Current rating: 20 amps.
Plastic material - Terminal Boards: See Table II.

Table II. Requirements for Plastics.

Terminal Board Class 1/	Maximum Temperature (^{o}C)	Materials	Applicable Specification
B	130	GPT-30F	MIL-M-24519
F	155	GDI-30F SDG-F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher temperature classification may be substituted for a lower temperature classification terminal board.

Dielectric Withstanding Test Voltage: 3,000 volts rms.

Terminal Lugs, Solder Type: TBLD 38, TBLS 38.

Terminal Board Bus (Jumper) Connectors: TBJA 38, TBJE 38, TBJG 38.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Custodian:

Army - ER
Navy - SH
Air Force - 85

Review Activities:

Army - AV, AR, MI
Navy - OS, EC
Air Force - 17, 99

User Activities:

Army - ME, AT
Navy - MC, AS
Air Force -

Preparing Activity:

Army - ER

(Project 5940-0993-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.