MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER,

SCREW TYPE, CLASS 40TB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the terminal boards described herein shall consist of this document and the latest issue of Specification MIL-T-55164.

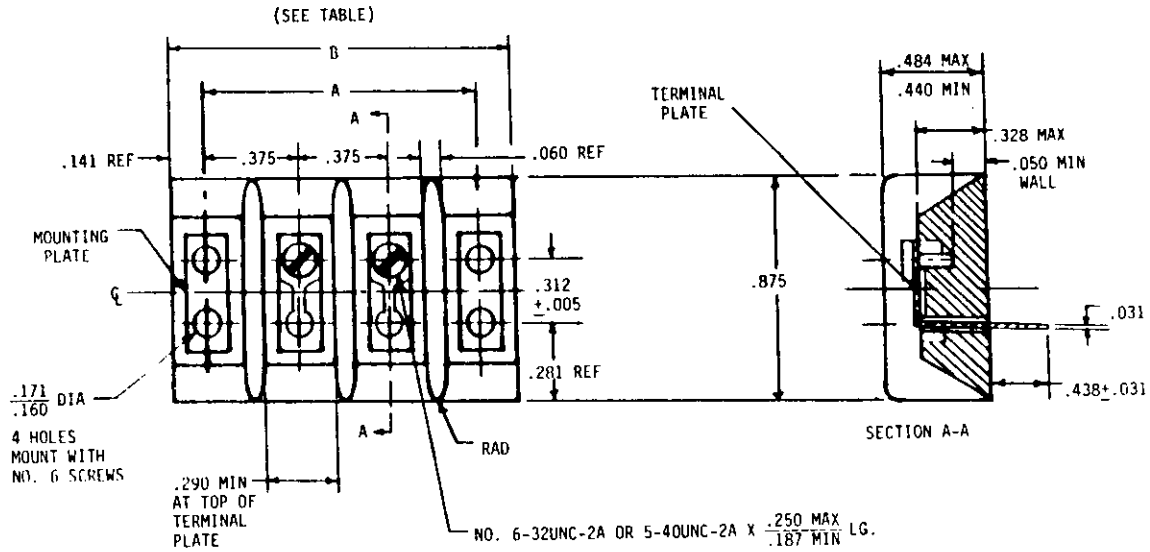


Figure 1 Terminal Board.

INCHES	MM	INCHES	MM
.005	0.13	.250	6.35
.031	0.79	.281	7.14
.050	1.27	.290	7.37
.060	1.52	.312	7.92
.141	3.58	.375	9.53
.160	4.06	.438	11.13
.171	4.34	.440	11.18
.187	4.75	.484	12.29
		.875	22.23

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.
5. An optional feedthru may be made integral with the terminal board.

TABLE I Dimensions.

Terminal Board Type Designation 2/	Dimensions 1/			
	A		B	
	inches	(mm)	inches	(mm)
40TB2_	1.125	(28.22)	1.422	(36.12)
40TB3_	1.500	(38.10)	1.797	(45.64)
40TB4_	1.875	(47.63)	2.172	(55.17)
40TB5_	2.250	(57.15)	2.562	(65.07)
40TB6_	2.625	(66.68)	2.938	(74.63)
40TB7_	3.000	(76.20)	3.312	(84.12)
40TB8_	3.375	(85.73)	3.688	(93.68)
40TB9_	3.766	(95.66)	4.062	(103.17)
40TB10_	4.141	(105.18)	4.438	(112.73)
3/ 40TB11_	4.516	(114.76)	4.812	(122.22)
40TB12_	4.891	(124.23)	5.188	(131.78)
3/ 40TB13_	5.266	(133.76)	5.562	(141.27)
40TB14_	5.641	(143.28)	5.938	(150.83)
40TB15_	6.016	(152.81)	6.312	(160.32)
40TB16_	6.391	(162.33)	6.688	(169.33)
3/ 40TB17_	6.766	(171.86)	7.062	(179.37)
40TB18_	7.141	(181.38)	7.438	(188.93)
3/ 40TB19_	7.516	(190.91)	7.828	(198.83)
40TB20_	7.906	(200.81)	8.203	(208.36)
40TB21_	8.281	(210.34)	8.578	(217.88)
40TB22_	8.656	(219.86)	8.953	(227.41)
40TB23_	9.031	(229.39)	9.328	(236.93)
40TB24_	9.406	(238.91)	9.703	(246.46)
40TB25_	9.781	(248.44)	10.078	(255.98)
3/ 40TB26_	10.156	(257.96)	10.453	(265.51)
40TB27_	10.531	(267.49)	10.828	(275.03)
40TB28_	10.906	(277.01)	11.219	(284.96)
40TB29_	11.281	(286.54)	11.594	(294.49)
40TB30_	11.672	(296.47)	11.969	(304.01)
40TB31_	12.031	(305.59)	12.359	(313.92)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.

1/ Tolerances on terminal boards up to and including 6 inches in length:

for A dimension: +.031, -.016
for B dimension: +.031, -.062

Over 6 inches in length:

for A dimension: +.047, -.031
for B dimension: +.047, -.062

These tolerances are not meant to affect the nominal .375 inch dimension between terminal rows. The nominal .375 inch dimension shall be maintained to permit use of such auxiliary hardware as fanning strips, identification plates, etc.

2/ Add letter B, F or H for temperature range to complete type designation.

3/ Not to be used for new design.

REQUIREMENTS

Terminal Boards:

Dimension and Configuration: See Figure 1 and Table I.
Voltage rating (maximum): 300 volts.
Current rating: 7.5 amps.
Plastic material - Terminal Boards: See Table II.

Table II. Requirements for Plastics.

Terminal Board Class 1/	Maximum Temperature(^{o}C)	Materials	Applicable Specification
B	130	GPT-30F	MIL-M-24519
F	155	GDI-30F SDG-F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher temperature classification may be substituted for a lower temperature classification terminal board.

Dielectric withstanding test voltage: 3,000 volts rms.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.

Custodians:

Army - ER
Navy - SH
Air Force - 85

Review Activities:

Army - AV, AR, MI
Navy - OS, EC
Air Force - 17, 99

User Activities:

Army - ME, AT
Navy - MC, AS
Air Force -

Preparing Activity:

Army - ER

(Project 5940-0993-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.