INCH-POUND
A-A-55432A
15 July 2021
SUPERSEDING
A-A-55432
26 August 1993

# COMMERCIAL ITEM DESCRIPTION

## LIGHT, CHEMILUMINESCENT, 15 IN – 12 HR – B, E, F

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers 12 hour 15 inch chemiluminescent light (commonly known as a light wand) used for a variety of lighting, marking, and identification purposes.

2. CLASSICATION. These chemiluminescent lights shall be of the following color letter as specified and shall be identified in the Part Identification Number (PIN) paragraph (see 7.2).

Color B = Green
Color E = Red
Color F = Yellow

3. SALIENT CHARACTERISTICS

3.1 Design. The chemiluminescent lights shall be elongated having an overall length of 16 inches plus 0.034 minus 0.203 inches. The diameter shall be 0.703 inches plus or minus 0.060 inches and have a flat base on one end. Each end shall also have an extended boss 0.406 inches nominal wide, with a short transverse hole 0.188 inches nominal. Light sticks shall be individually wrapped in airtight foil. Light sticks shall be compatible with the items in Table III.

3.1.1 Fluid Level. The total vertical combined fluid level, when measured from the exterior of the flat base shall be no less than 12.2 inches.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6260

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

3.2 Interior. This chemiluminescent light specified in this CID shall produce a level of light intensity as specified in Table I for a specified length of time (12 hours). In addition, the chromaticity of the emitted light shall meet the requirements in Table II.

Table I. Light Intensity vs Time (Minimum Requirements)

| Color | | 15 Min | 1 HR | 2 HR | 3 HR | 4 HR | 5 HR | 6 HR | 8 HR | 10 HR | 12 HR |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Green | A | 4.251 | 2.889 | 1.224 | 0.614 | 0.363 | 0.270 | 0.198 | 0.120 | 0.095 | 0.078 |
| | B | 45.76 | 31.10 | 13.18 | 6.61 | 3.91 | 2.91 | 2.14 | 1.30 | 1.03 | 0.85 |
| Red | A | 0.552 | 0.519 | 0.474 | 0.367 | 0.300 | 0.277 | 0.230 | 0.157 | 0.104 | 0.077 |
| | B | 5.95 | 5.59 | 5.11 | 3.96 | 3.59 | 2.99 | 2.48 | 1.69 | 1.12 | 0.83 |
| Yellow | A | 2.302 | 1.832 | 1.611 | 1.366 | 1.242 | 1.056 | 0.850 | 0.700 | 0.467 | 0.365 |
| | B | 24.70 | 19.73 | 17.35 | 14.71 | 11.70 | 9.50 | 7.70 | 5.20 | 3.70 | 3.00 |

NOTES:
1. (a) Lumens per square foot
   (b) Lumens per square meter
2. All tests to be conducted at 75± 2°F or 24± 1°C (as applicable)
3. ("A") after intensity reading indicates wand to meter distance equal to zero (0) inches

TABLE II. 1931 CIE Chromaticity Diagram Coordinates

| | | | |
|---|---|---|---|
| Green | X Coordinate | 0.2164 | 0.2830 |
| | Y Coordinate | 0.6536 | 0.6578 |
| Red | X Coordinate | 0.6462 | 0.6681 |
| | Y Coordinate | 0.3336 | 0.3458 |
| Yellow | X Coordinate | 0.4790 | 0.4910 |
| | Y Coordinate | 0.5040 | 0.5139 |

NOTES:
1. 1931 CIE Chromaticity Diagram Coordinates – measured using a colorimeter with a lens measurement area diameter between 0.008 and 0.010 inch. The values in Table II identify the point that represents the shade of color for Green, Red, and Yellow.
2. Coordinate measurements shall meet the following criteria measured 10 minutes after activation at 75±2°F.

3.3 Test Criteria. Illuminance shall meet or exceed the data presented in Table I. Activated by manually flexing the plastic tube, breaking the inner vial and shaking to combine components. Plastic tube shall not leak and vial will not break when subjected to an external pressure equivalent to 30,000 feet at 75°F in a vacuum chamber. Must withstand a free fall, while still in wrapper, from a height of 8.5 feet on a hard surface (concrete) without activated or leakage.

3.3.1 Test Conditions.

a. Meter: Photometer with a range of at least 0.1 to 100,000 foot lamberts and less than ± 5% maximum absolute uncertainty. All meters traceable to NIST.
b. Light stick to radiometer probe distance: 1.50 inches ± 0.02 inches.
c. Temperature stabilization: Wands, while still in sealed foil wrappers, will be placed in a water bath at test temperature for a minimum of one (1) hour before activation.
d. Remove wand from sealed foil wrapper immediately before activation. Light wand shall be handled by cap end during testing.
e. Activation method: Bend; agitate for fifteen (15) seconds.
f. Wands shall be agitated for ten (10) seconds before each reading.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

g. Wands kept under the cover or in darkness; may be exposed to light during movement to and from light meter.
h. All meter readings in darkness.
i. Meter kept at 75°F for all tests.
j. Temperature tolerances: ± 2°F
k. Chemiluminescent lights shall be held in a vertical position with cap end down when light output measurement is made. Light stick holder test fixture shall be made of a non-reflective matte finish black material.

3.4 Individual wrapping. Individual light sticks shall be sealed in light blocking foil wrapping. Foil wrapping shall be made of composite material having an aluminum layer with a thickness of 0.0007 inches. Foil wrapping shall be color coded and contain operating instruction.

3.5 Foil wrapper leakage, Samples will be tested for foil wrapper leakage by an application of 6 psi air pressure inside of the foil wrap while submerged under water. A steady stream of air bubbles coming from any portion of the foil, except where the foil has been penetrated by the air supply shall be classified as an airtight foil failure.

3.6 Light Blocking Test. Activate the light stick while it is still inside the foil wrapper and observe it in a completely darkened room. Foil wrapper shall not transmit light anywhere through it except the seams.

3.7 Foil wrapping mark. Individual foil wrapping shall be marked with the following information unless otherwise specified:

1. NSN
2. Product Description
3. Manufacturer's Lot number
4. Expiration date

3.8 Shelf life. Each chemiluminescent light shall have a minimum of 42 months life remaining at the time of delivery to the Government and shall have been manufactured within 6 months of the date of delivery to the Government.

## 4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

## 5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.


5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.4c).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

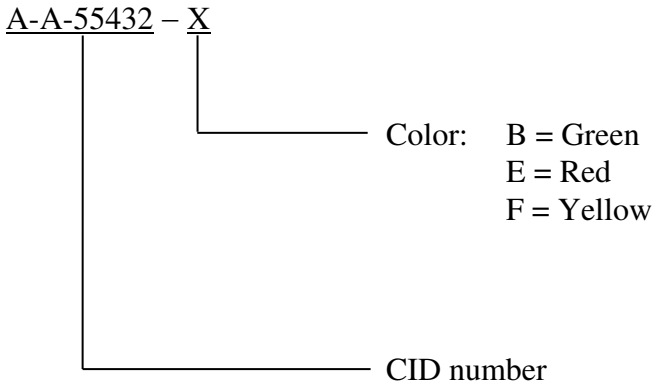


7.2 Sources of documents.

7.2.1 FAR. Electronic copies of the FAR may be obtained from https://www.acquisition.gov/far/.

7.2.2 Government documents. Electronic copies of government documents can be obtained from https://quicksearch.dla.mil/.

7.2.3 Code of Federal Regulations. Electronic copies of the CFR can be obtained from https://ecfr.federalregister.gov/.

7.2.4 ASTM International. Electronic copies of ASTM documents can be obtained from https://www.astm.org/.

7.3 National Stock Numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

6260012470362
6260012650612
6260012650613

7.4 Ordering data. Acquisition documents must specify the following information:
a. CID document number, revision, and CID PIN



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.

b. Classification (see 2)
c. Packaging requirements (see 6.1)
d . SDS shall be provided to contracting officer prior to award (FAR 52.233-3)

7.5 Light Stick Accessories. Light sticks must be compatible with the accessory items listed in Table III.

Table III. Light Stick Accessories

| Name | NSN |
|---|---|
| Handle, Light, Safety | 6260-01-255-3345 |

7.6 Safety Data Sheet. Manufacturer shall provide evidence in the form of a Safety Data Sheet (SDS) (Fed-Std-313) that the components shall not be highly toxic, toxic, corrosive or irritant in terms of the definitions and tests in Code of Federal Regulations, Title 16, Part 1500 (Federal Hazardous Substances Act). Manufacturer shall certify that the chemical components contain no known members of the phthalate family of solvents. None of the components if tested individually will be classified as hazardous as defined by the US Department of Transportation's Hazardous Materials Regulations under 49 CFR 100-179. In particular, none of the individual components will be defined as a flammable liquid under these regulations and determined by ASTM Standard Test Method D56, Flash Point by Tag Closed Cup Tester.

7.7 Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:
Custodian:
Navy - EC
DLA - GS

Reviewers:
Navy - YD

CIVIL AGENCY
COORDINATING ACTIVITY:
GSA - FAS

Preparing activity:
DLA – GS2

(Project 6260-2021-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:46Z
Check the source to verify that this is the current version before use.