[INCH-POUND]
A-A-55457A
April 17, 1995
SUPERSEDING
A-A-55457
November 5, 1993


COMMERCIAL ITEM DESCRIPTION

DISK, FLEXIBLE, TWO-SIDED, DOUBLE-DENSITY, 5.3 TRACKS PER MILLIMETER (TPMM) (135 TRACKS PER INCH (TPI)), 90 MILLIMETERS (MM) (3.5 INCH)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers the general requirements for a two-sided, double-density, 5.3 TPMM (135 TPI), 90 mm (3.5 inches) flexible disk. Flexible disks covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION. This CID uses a classification system which is included in the Part or Identification Number (PIN) as shown in the following example (see 6.1).

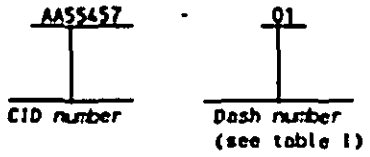

3. SALIENT CHARACTERISTICS

TABLE I. Characteristics

AA55457-	Disk format	Minimum formatted memory
01	Unformatted.	---
02	Preformatted for IBM PC/AT, MS DOS 3.1 and higher.	720 kilobytes (kb)
03	Preformatted for MAC.	

3.1 Recording surfaces. This flexible disk shall have two recording surfaces.

3.2 Number of tracks. There shall be 80 discrete concentric data tracks in the recording area for data interchange on each side of this disk.

3.3 Track density. This flexible disk shall have 5.3 TPMM (135 TPI).

3.4 Disk density. This flexible disk shall be double density with a minimum of 1.0 megabytes (Mb) of unformatted memory.

3.5 Bits per radian (BPR). The BPR for this flexible disk shall be 7,958 BPR.

3.6 Jacket. The jacket's side dimensions shall be 90.0 mm +0.4 mm -0.1 mm (3.54 inches +0.016 inch -0.004 inch) x 94.0 mm ±0.3 mm (3.70 inches ±.012 inch).

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Electronics Supply Center, ATTN: DESC-ELDM, 1507 Wilmington Pike, Dayton, OH 45444-5765, or telephone (513) 296-6189, or facsimile (FAX) (513) 296-8868.

AMSC N/A
FSC 7045
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:47Z
Check the source to verify that this is the current version before use.

3.7 Jacket thickness. The jacket thickness shall be 3.3 mm ±0.2 mm (.13 inch ±.008 inch).

3.8 Operating surface temperature. This flexible disk shall withstand an operating temperature at its surface in the range from 10°C to 60°C (50°F to 140°F) at a relative humidity of 8 percent to 80 percent.

3.9 Design and construction. Flexible disks supplied to this CID shall be as specified herein and shall meet the requirements of ANSI X3.137.

3.10 Used or reconditioned material. A manufacturer shall not furnish any flexible disk which is used or reconditioned or is comprised of used or reconditioned material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4.2 Certificate of compliance. Each contractor desiring to be listed as a suggested source of supply shall submit a DESC certificate of compliance to DESC-ELDM. This certificate shall state that the contractor's product meets all the requirements of ANSI X3.137, and all requirements of this CID. In addition, a certificate of compliance shall accompany all flexible disks supplied to this CID.

4.3 Market acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

6. NOTES

6.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

6.2 Source of documents.

Other Publications

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI X3.137 - One and Two-Sided, Unformatted, 90-mm (3.5 Inch) , 135-tpi (5.3 TPMM), Flexible Disk Cartridge for 7958 BPR Use- General, Physical, and Magnetic Requirements.

(Applications for copies should be addressed to the American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002).

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

6.3 Government users. To acquire information on obtaining these flexible disks from the Government inventory system, contact Defense Electronics Supply Center, ATTN: DESC-EOC, 1507 Wilmington Pike, Dayton, OH 45444-5520, or telephone (513) 296-5625.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the currentversion before use.

6.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Quality assurance provisions.

c. If a bid sample is required.

d. Packaging requirements.

6.5 Suggested sources of supply. Suggested sources of supply are listed below. Additional sources will be added as they become available.

CID dash number AA55457-	Vendor commercial PIN CAGE 0CEN9	Vendor commercial PIN CAGE 0EGZ7	Vendor commercial PIN CAGE 0TWG7	Vendor commercial PIN CAGE 04833	Vendor commercial PIN CAGE 52327	Vendor commercial PIN CAGE 55151	Vendor commercial PIN CAGE 74712
01	15720-09-E000	54249	C14A211X	725-2995-1	051111-12042	555910	476501
02	15729-09-E000	54038	---	---	051111-12882	---	4765011BN
03	15728-09-E000	54041	---	---	051111-40758	---	476501MAC

Vendor CAGE number	Vendor name and address
0CEN9	Syncon Technologies, Incorporated 1000 Syncon Drive Mitchell, SD 57301-4767 (800) 843-9862
0EGZ7	BASF Corporation Information Systems Division 35 Crosby Drive Bedford, MA 01730-1471 (703) 256-7112
0TWG7	Wabash Computer Products, Incorporated 12210 E. 52nd Street Tulsa, OK 74146-6204 (918) 254-9704
04833	Nashua Media, Incorporated DBA Wang Express 57 Daniel Webster Highway Merrimack, NH 03054-4811 (508) 656-8585
52327	Minnesota Mining and MFG Company Data Storage Products Division 3M Center St. Paul, MN 55144-1000 (800) 854-0033
55151	Maxell Corporation of America 22-08 Route 208 Fair Lawn, NJ 07410-2606 (619) 661-6600
74712	Athana, Incorporated 23955 President Avenue Harbor City, CA 90710-1333 (310) 320-4581

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the currentversion before use.

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - KMR

PREPARING ACTIVITY:

DLA-ES

Project 7045-0016

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:47Z
Check the source to verify that this is the currentversion before use.