[INCH-POUND]
A-A-55460D
30 January 2009
SUPERSEDING
A-A-55460C
October 1, 2003

COMMERCIAL ITEM DESCRIPTION

INTERRUPTER, GROUND FAULT, TWO-POLE, THREE-WIRE HOSPITAL GRADE, 15-AMPERE

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the general requirements for a 15-ampere hospital grade ground fault interrupter. Ground fault interrupters covered by this CID are intended for commercial/industrial applications.

2. CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system that is included in the PIN as shown in the following example (see 7.1).

AA55460	-	S	B	I
CID number		Termination style (see table I) (S) for screw terminals. (W) for wire leads.	Color code (B) Brown (I) Ivory (R) Red (G) Gray (W) White	Indicator light (I) for indicator light. Blank for no indicator light.

3. SALIENT CHARACTERISTICS.

3.1 Interface and physical dimensions. Ground fault interrupters supplied to this CID shall be as specified herein and shall meet the requirements of UL 943 for class A ground fault interrupters and the hospital grade requirements as called out in UL 498 (see figure 1).

3.2. Ampere rating. The ampere rating shall be 15 amperes maximum.

3.3 Voltage rating. The voltage rating shall be 125 V ac maximum.

3.4 Frequency rating. The frequency rating shall be 60 Hz.

3.5 Trip threshold. This ground fault interrupter shall trip when a fault current to ground is 4-6 mA minimum.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DSCC-VAT, P.O. Box 3990, Columbus, OH 43218-3990, or email to mailto:CircuitProtect@dscc.dla.mil. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at http://assist.daps.dla.mil.

AMSC N/A FSC 5925

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

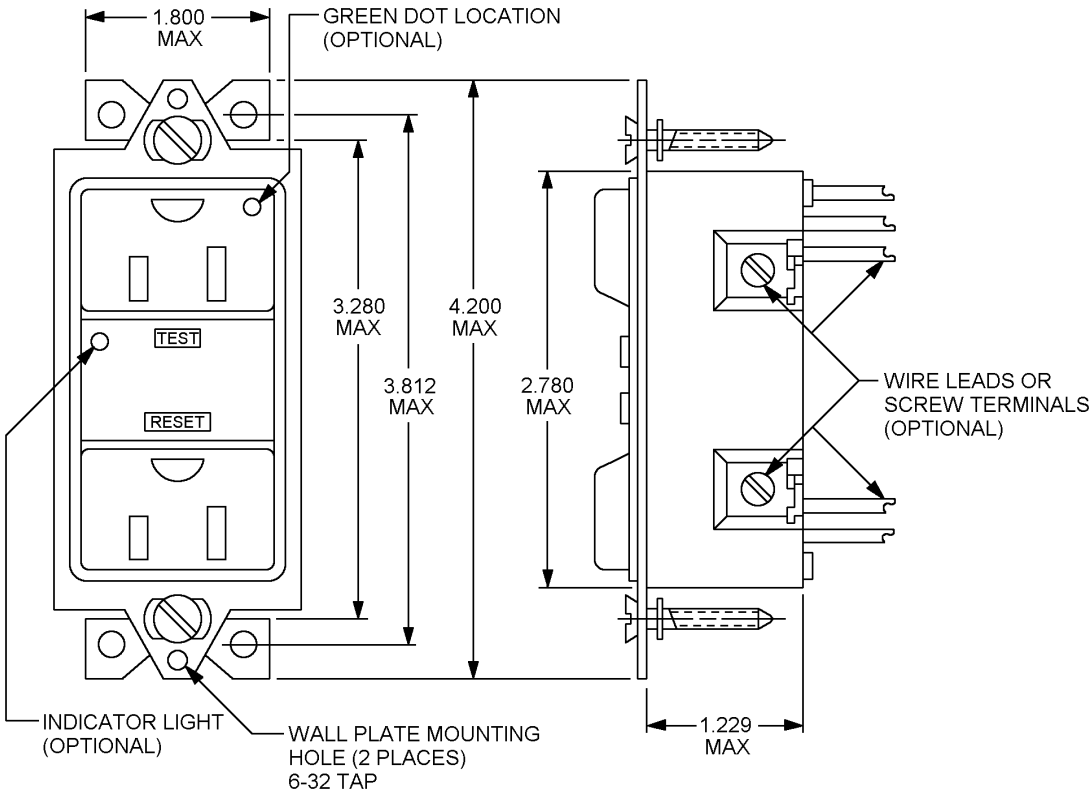

Inches	mm
1.229	31.22
1.800	45.72
2.780	70.61
3.280	83.33
3.812	96.82
4.200	106.68

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.005 inch (0.13 mm).
3. Location of test and/or reset buttons optional and the indicator light is optional.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

3.6 Dimensions. Dimensions shall conform to NEMA standard WD 6 (reference NEMA configuration 5-15R) (see figure 1).

3.7 Termination style. The termination style shall be either screw terminals or wire leads.

3.8 Wire size. The maximum wire size the screw terminal connectors shall accept is number 10 American Wire Gauge (AWG). The minimum wire size of the wire shall be number 14 AWG.

3.9 Wire lead length. The free length of the wire leads shall be 4 inches (101.6 millimeters) minimum. The free length of the ground lead shall be 6 inches (152.4 millimeters) minimum.

3.10 Indicator light. If a yellow indicator light is provided, when lighted it shall indicate the “tripped” condition of the circuit interrupter; when unlighted it shall indicate power availability to the receptacle.

3.11 Marking. Ground fault interrupters or their unit package supplied to this CID shall be marked with the manufacturer’s (MFR’s) standard commercial PIN and the ground fault interrupters shall bear the appropriate UL listing mark. (NOTE: The part number marked on the unit pack shall be the CID PIN.)

3.12 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.13 Workmanship. Ground fault interrupters shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptance. The following market acceptance criteria are necessary to document the quality of the product to be provided under this CID:

a. The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

b. The company must have sold 1,000 units meeting this CID in the commercial marketplace over the past 2 years.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 PIN. The PIN should be used for Government purposes to buy commercial products to this CID. See section 2 for PIN format example.

7.2 Environmentally preferable material. Environmentally preferable materials should be used to the maximum extent possible to meet the requirements of this specification. As of the dating of this document, the U.S. Environmentally Protection Agency (EPA) is focusing efforts on reducing 31 priority chemicals. The list of chemicals is available on their website at http://www.epa.gov/osw/hazard/wastemin/priority.htm. Use of these materials on the list should be minimized or eliminated unless needed to meet the requirements specified herein (see Section 3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

7.3 Commercial and Government Entity (CAGE) code. For ordering purposes, inventory control, and submission of these protectors to DSCC under the Military Parts Control Advisory Group (MPCAG) evaluation program, CAGE code 58536 should be used.

7.4 Source of documents.

FEDERAL REGULATIONS

FAR - Federal Acquisition Regulations (FAR).

(Copies of this document is available online at http://www.acquisition.gov/comp/far/index.html from the U.S. Government Printing Office, 732 North Capital Street, NW, Washington D.C. 20401-0001.)

Other Publications

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA WD 6 - Wiring Devices - Dimensional Requirements.

(Copies of this document are available online at http://www.nema.org/ or from the National Electrical Manufacturers Association, 1300 North 17TH Street, Suite 1752, Rosslyn, VA 22209-3801.)

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 943 - Ground-Fault Circuit-Interrupters, Standard for Safety.

(Copies of this document are available online at http://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

7.5 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and CID PIN.

b. Product conformance provisions.

c. Packaging requirements.

7.6 Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
04009	Cooper Industries, Incorporated Cooper Wiring Devices 203 Cooper Circle Peachtree City, GA 30269-3075 Phone number: (770) 632-2227 Facsimile number: (770) 632-2268 E-mail: mailto:custserv@cooperwiringdevices.com Uniform Resource Locator (URL): www.cooperwiringdevices.com/

7.7 Part number (P/N) supersession data. These CID PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

TABLE II. P/N supersession data.

CID dash number AA55460-	MFR's CAGE	MFR's P/N 1/
SB	04009	N/A
SI	04009	N/A
SR	04009	N/A
SG	04009	N/A
SW	04009	N/A
SBI	04009	VGFH15B
SII	04009	VGFH15V
SRI	04009	VGFH15RD
SGI	04009	VGFH15GY
SWI	04009	VGFH15W
WB	04009	N/A
WI	04009	N/A
WR	04009	N/A
WG	04009	N/A
WW	04009	N/A

1/ The manufacturer's P/N shall not be used for procurement to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID PIN shown. For actual part marking requirements see 3.10.

7.8 Government users. To acquire information on obtaining these protectors from the Government inventory system, contact Defense Supply Center, Columbus, ATTN: DSCC-FMX, Post Office Box 3990, Columbus, OH 43218-3990, or telephone (614) 692-3677.

7.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

Preparing activity:

DLA-CC

Project 5925-2008-004

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.