COMMERCIAL ITEM DESCRIPTION

CONNECTORS ELECTRICAL PLUGS TIP DUAL
(BANANA PLUG)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies

The complete requirements for acquiring the connectors described herein shall consist of this document and CID A-A 55469

1 SCOPE This CID covers the general requirements for test point plugs and banana plugs for use in electrical and electronic equipment The test point connectors covered by this CID are primarily for use in airborne ground support and shipboard electrical and electronic equipment for test purposes only They are not intended for use as an integral part of the equipment for which the overall system operation is dependent Connectors covered by this CID are intended for commercial/industrial applications and shall not be used in military systems needing stringent environmental and electrical requirements

2 CLASSIFICATION This CID uses a classification system which is included in the Part Identification Number (PIN) as shown in the following example (see 7 1) The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor

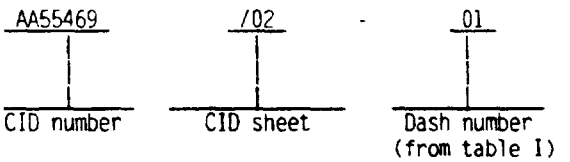


TABLE I Design and identification data

Dash number AA55469/02	Color	Current rating (amperes maximum)	Contact resistance (milliohms maximum)
01 and 03	Black	15	10
02 and 04	Red	15	10

3 SALIENT CHARACTERISTICS

3 1 CID sheet The electrical connectors shall be in accordance with the requirements specified herein in addition to the salient characteristics of A-A-55469

3 2 Design, construction, and dimensions Design construction and dimensions shall be as specified on figure 1 and table I


3 3 Contact current rating Contact current rating shall be as specified in table I

3 4 Contact resistance Contact resistance shall be as specified in table I

Beneficial comments recommendations additions deletions clarifications etc and any data which may improve this document should be sent to Defense Electronics Supply Center ATTN DESC ELDI 1507 Wilmington pike Dayton OH 45444 5765 or telephone (513) 296-5391 or facsimile (FAX) (513) 296 8868

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

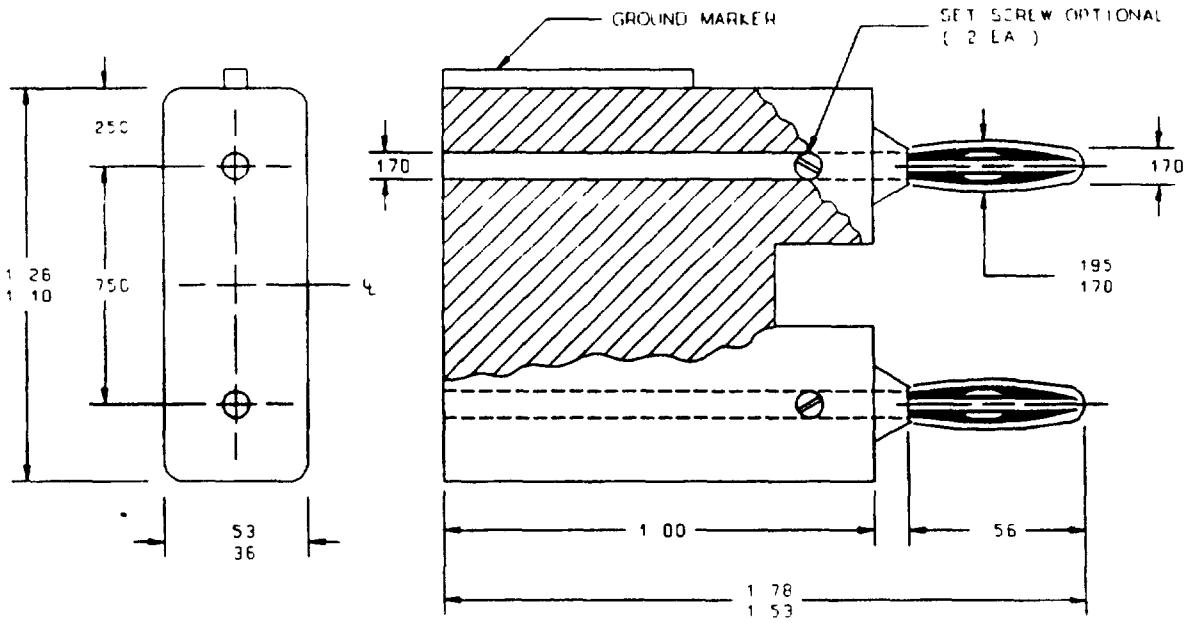

AA55469/02-01 and AA55469/02-02

Figure 1 Configuration and dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

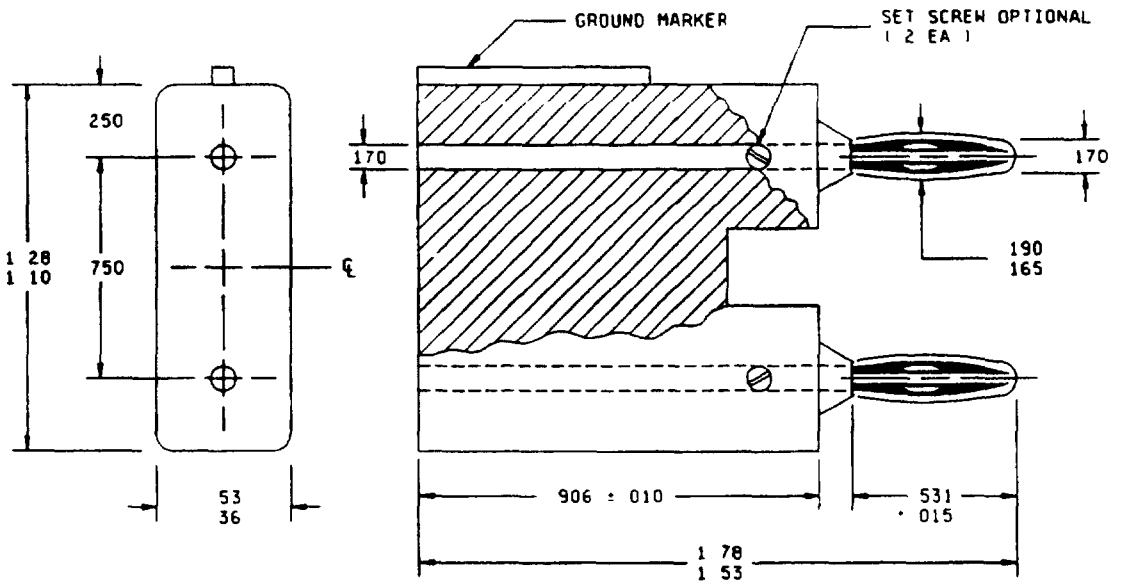

AA55469/02-03 and AA55469/02-04

Inches	mm	Inches	mm
010	0 25	56	14 2
015	0 38	750	19 05
165	4 19	906	23 01
170	4 32	1 00	25 41
190	4 83	1 10	27 9
195	4 95	1 28	32 5
36	9 1	1 53	38 9
53	13 5	1 78	45 2
531	13 49		

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for information only
3. Unless otherwise specified tolerances are ± 010 (0 25 mm) for three-place decimals and ± 03 (0 8 mm) for two-place decimals
4. When set screw is used the head shall be below the surface of the insulating material

Figure 1 Configuration and dimensions Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

3 5 Dielectric withstanding voltage (at sea level) Dielectric withstanding voltage (at sea level) shall be 3 000 V rms at 60 Hz or 5 000 V dc

3 6 Operating voltage Operating voltage is 300 volts rms 60 hertz at sea level

3 7 Marking Test point connectors supplied to this CID shall be marked with the manufacturer s standard commercial PIN

4 REGULATORY REQUIREMENTS This section is not applicable to this CID

5 QUALITY ASSURANCE PROVISIONS Shall be as specified in CID A-A-55469

5 1 Certificate of compliance Each contractor desiring to be listed as a suggested source of supply shall submit a DESC certificate of compliance to DESC-ELDI This certificate shall state that the contractor s product meets all the requirements of this CID In addition a certificate of compliance shall accompany all test point connectors supplied to this CID

6 PACKAGING

6 1 Preservation, packing, and marking Preservation packing and marking shall be as specified in the contract or order

7 NOTES

7 1 Part Identification number (PIN) The PIN procedure is for government purposes and does not constitute a requirement for the contractor See 2 for PIN format example

7 2 Source of document

Commercial Item description

A-A-55469 - Connectors Electrical Plugs

(Copies of commercial item descriptions are available from the Defense Printing Service Detachment Office Building 4D (Customer Service) 700 Robbins Avenue Philadelphia PA 19111-5094)

7 3 Government users To acquire information on obtaining these test point connectors from the Government inventory system contact Defense Electronics Supply Center ATTN DESC-EON 1507 Wilmington Pike Dayton OH 45444-5522 or telephone (513) 296-8436

7 4 Ordering data Ordering data shall be as specified in A-A-55469

7 5 Supersession data This CID supersedes MIL-C-28901/2

7 6 Suggested sources of supply Suggested sources of supply are listed below Additional sources will be added as they become available The vendors listed have submitted a certificate of compliance to DESC-ELDI and meet the market acceptability requirements of this CID

Dash number (see table I) AA55469/02-	Vendor commercial PIN CAGE 91967	Vendor commercial PIN CAGE 74970	Applicable NSN
01	210 103	--	5935-00-931-0380
02	210-102	---	5935-00-140-3354
03	- -	108 0203-001	5935 00-007-8602
04		108-0202-001	5935-00 567-0521

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Vendor CAGE number	Vendor name and address
74970	E F Johnson 299 Johnson Ave Waseca MN 56093
91967	NT-T Smith 632 Arch Street Meadville PA 16335 814-724-6440

CIVIL AGENCY COORDINATING ACTIVITY

GSA - 7FXE

PREPARING ACTIVITY

DLA-ES

(Project 5935 D528)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.