INCH-POUND

A-A-55469/3C
01 October 2015
SUPERSEDING
A-A-55469/3B
1 August 2003

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, PLUGS, TIP, DUAL (BANANA PLUG)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

The complete requirements for acquiring the connectors described herein shall consist of this document and the issue in effect of CID A-A-55469

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This CID uses a classification system which is included in the PIN as shown in the following example.

AA55469	/03	-	01
CID number	CID sheet		Dash number (see table I)

TABLE I. Design and identification data.

Dash number AA55469/03	Color	Current rating (amperes, maximum)	Contact resistance (milliohms, maximum)
01 and 03	Black	15	10
02 and 04	Red	15	10

SALIENT CHARACTERISTICS.

Design, construction, and dimensions. Design, construction, and dimensions shall be as specified on figure 1 and table I.

Contact current rating. Contact current rating shall be as specified in table I.


Contact resistance. Contact resistance shall be as specified in table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Defense Supply Center, Columbus, ATTN: DLA Land & Maritime-VA**I**, Post Office Box 3990, Columbus OH 43216-5000 or by email: RFConnectors@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

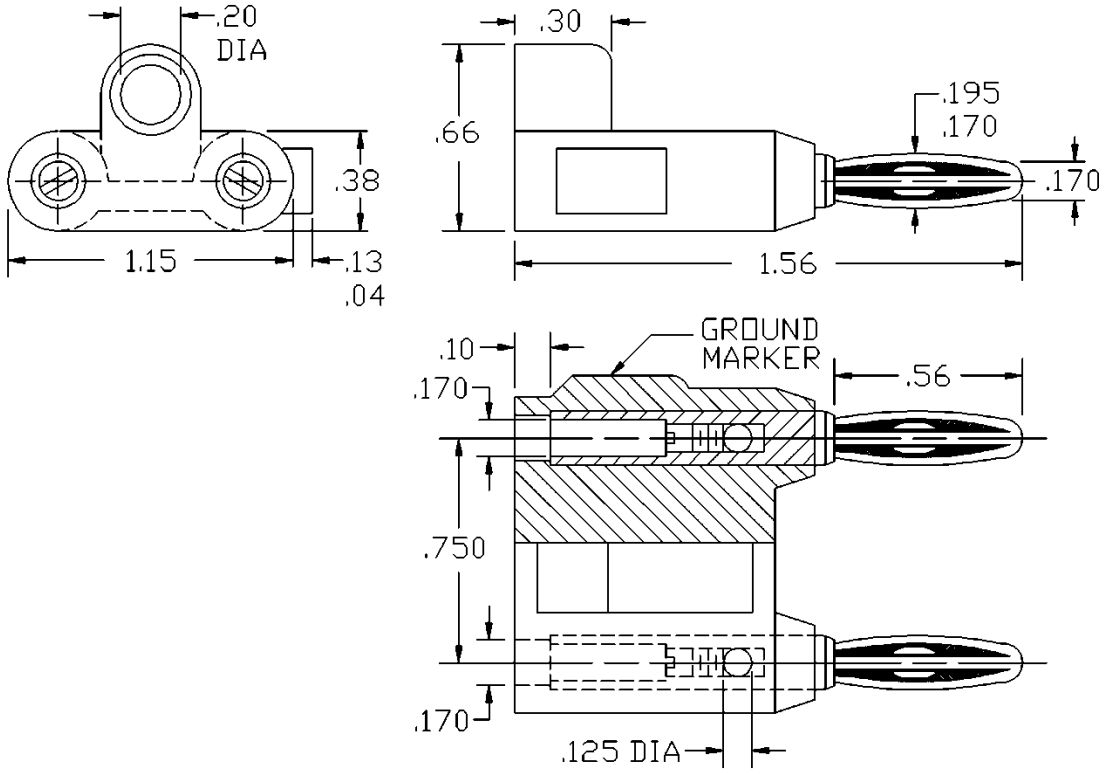


AA55469/03-01 and AA55469/03-02

Inches	mm
.04	1.02
.10	2.54
.125	3.18
.13	3.30
.170	4.32
.195	4.95
.20	5.08
.30	7.62
.38	9.65
.56	14.22
.66	16.76
.750	19.05
1.15	29.21
1.56	39.62

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

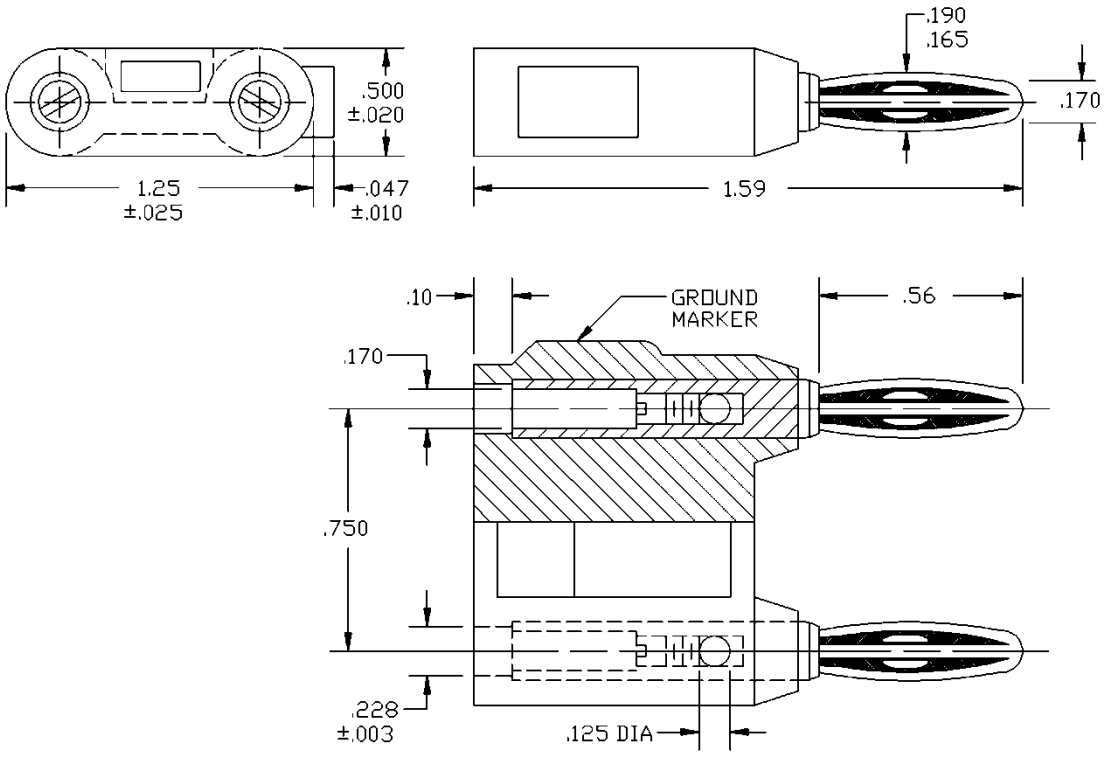

A-A55469/03-03 and A-A-55469/03-04

Inches	mm	Inches	mm
.003	0.08	.170	4.32
.010	0.25	.190	4.38
.020	0.50	.228	5.79
.025	0.64	.500	12.7
.047	1.19	.56	14.22
.10	2.54	.750	19.05
.125	3.18	1.25	31.75
.165	4.19	1.59	40.39

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Unless otherwise specified, tolerances are ± .010 (0.25 mm) for three-place decimals and ± .03 (0.08 mm) for two-place decimals.
3. When set screw is used, the head shall be below the surface of the insulating material.

FIGURE 1. Configuration and dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage (at sea level). Dielectric withstanding voltage (at sea level) shall be 3,000 V rms at 60 Hz or 5,000 V dc.

Operating voltage. Operating voltage is 300 volts rms, 60 hertz at sea level.

Marking. Connectors supplied to this CID shall be marked with the manufacturer's standard commercial part number.

NOTES.

Part or Identifying Number (PIN). The PIN should be used for Government purposes to buy commercial products to this CID. See classification information for PIN format example.

Supersession data. This CID supersedes MIL-C-28901/3.

Suggested sources of supply. Suggested sources of supply are listed below. Additional sources will be added as they become available. The vendors listed have submitted a certificate of compliance to DLA Land & Maritime -VAI and meet the requirements of this CID.

Dash number (see table I) AA55469/03-	Vendor commercial PIN CAGE 91967	Vendor commercial PIN CAGE 74970	Applicable NSN
01	1675-103	---	5935-00-964-4921
02	1675-102	---	5935-00-350-1790
03	---	108-0253-001	5935-00-833-2785
04	---	108-0252-001	5935-01-266-0849

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be used to restrict procurement to only the manufacturers shown.)

Vendor CAGE number	Vendor name and address
74970	E.F. Johnson 299 Johnson Avenue Waseca, MN 56093
91967	Abbatron 632 Arch Street Meadville, PA 16335

Revision notations. The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
AF- 85
DLA – CC

Preparing activity:

DLA – CC

(Project 5935-2015-186)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:47Z
Check the source to verify that this is the current version before use.