FED. SUP CLASS
2590

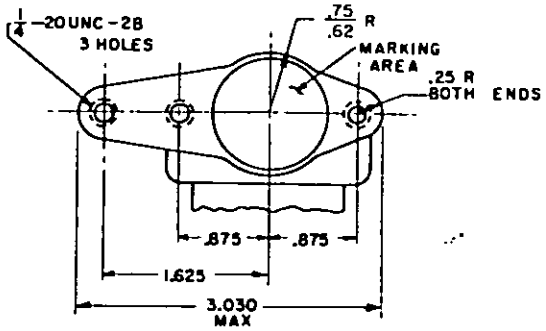

TYPICAL VEHICULAR LIGHT WIRING CHART			
TERMINAL	PIN	A	BO LOW
TERMINAL	PIN	B	BO HI
TERMINAL	PIN	C	BO FEED
TERMINAL	PIN	E	SERVICE LOW
TERMINAL	PIN	F	SERVICE HI
TERMINAL	PIN	G	SERVICE FEED
TERMINAL	PIN	D	HI BEAM INDICATOR
TERMINAL	PIN	H	HI BEAM INDICATOR

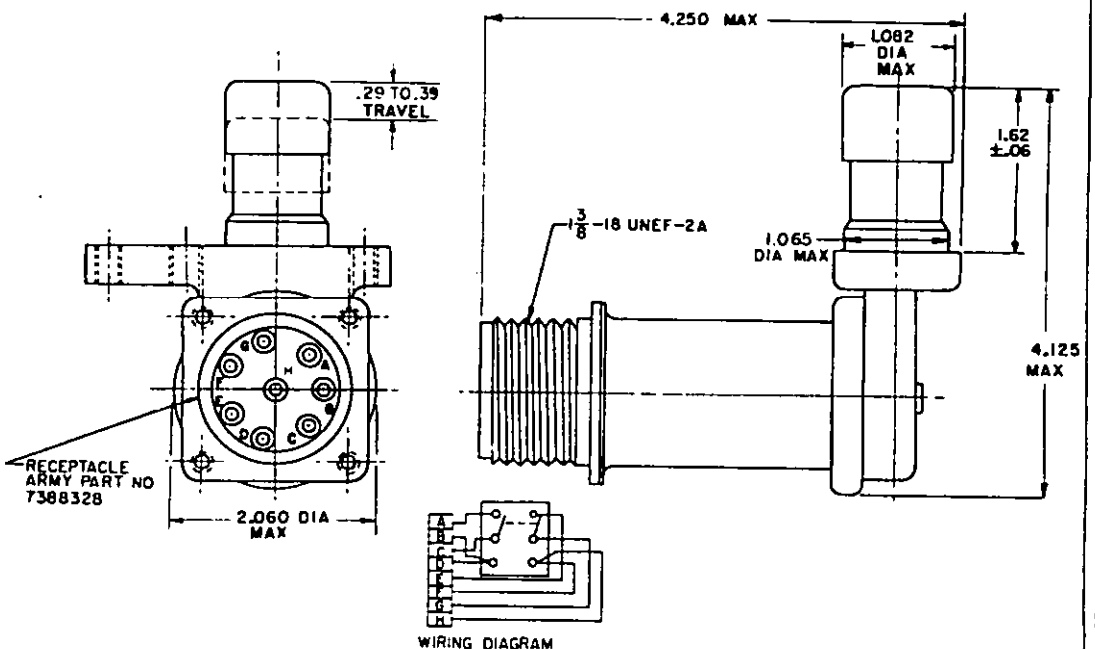

NOTES:

1. TYPE III (MULTI-POLE, DOUBLE THROW, NO OFF), CLASS B (FAST MAKE AND BREAK), GRADE 1, (ENCLOSED, WATERTIGHT) OF PROCUREMENT SPECIFICATION.
2. 15 AMP RESISTIVE LOAD, 10 AMP INDUCTIVE LOAD, 8 AMP LAMP LOAD.
3. PRESSURE REQUIRED TO OPERATE THE SWITCH SHALL BE 35 POUNDS MAXIMUM.
4. SWITCH SHALL WITHSTAND A MINIMUM PRESSURE OF 100 POUNDS WITHOUT DAMAGE.
5. SWITCH SHALL NOT EXCEED A MAXIMUM WEIGHT OF 14 OUNCES.
6. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .015.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
10. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(A) ENTIRE STANDARD REVISED

MS PART NO	FORMER ARMY PART NO
MS 53001-1	7354063

P.A.
ARMY-AT
Other Cust

TITLE
SWITCH, BEAM SELECTING, HEADLIGHT— DPDT, NO OFF, 28 VOLT DC

MILITARY STANDARD
MS53001

PROCUREMENT SPECIFICATION
MIL-S-13625 (AT)

SUPERSEDES:

SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

USER ACTIVITIES: ARMY-ME; NAVY-MC, YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 15 DECEMBER 1961 REVISED (A) 31 DECEMBER 1968

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:19Z
Check the source to verify that this is the current version before use.