FED. SUP CLASS
2540

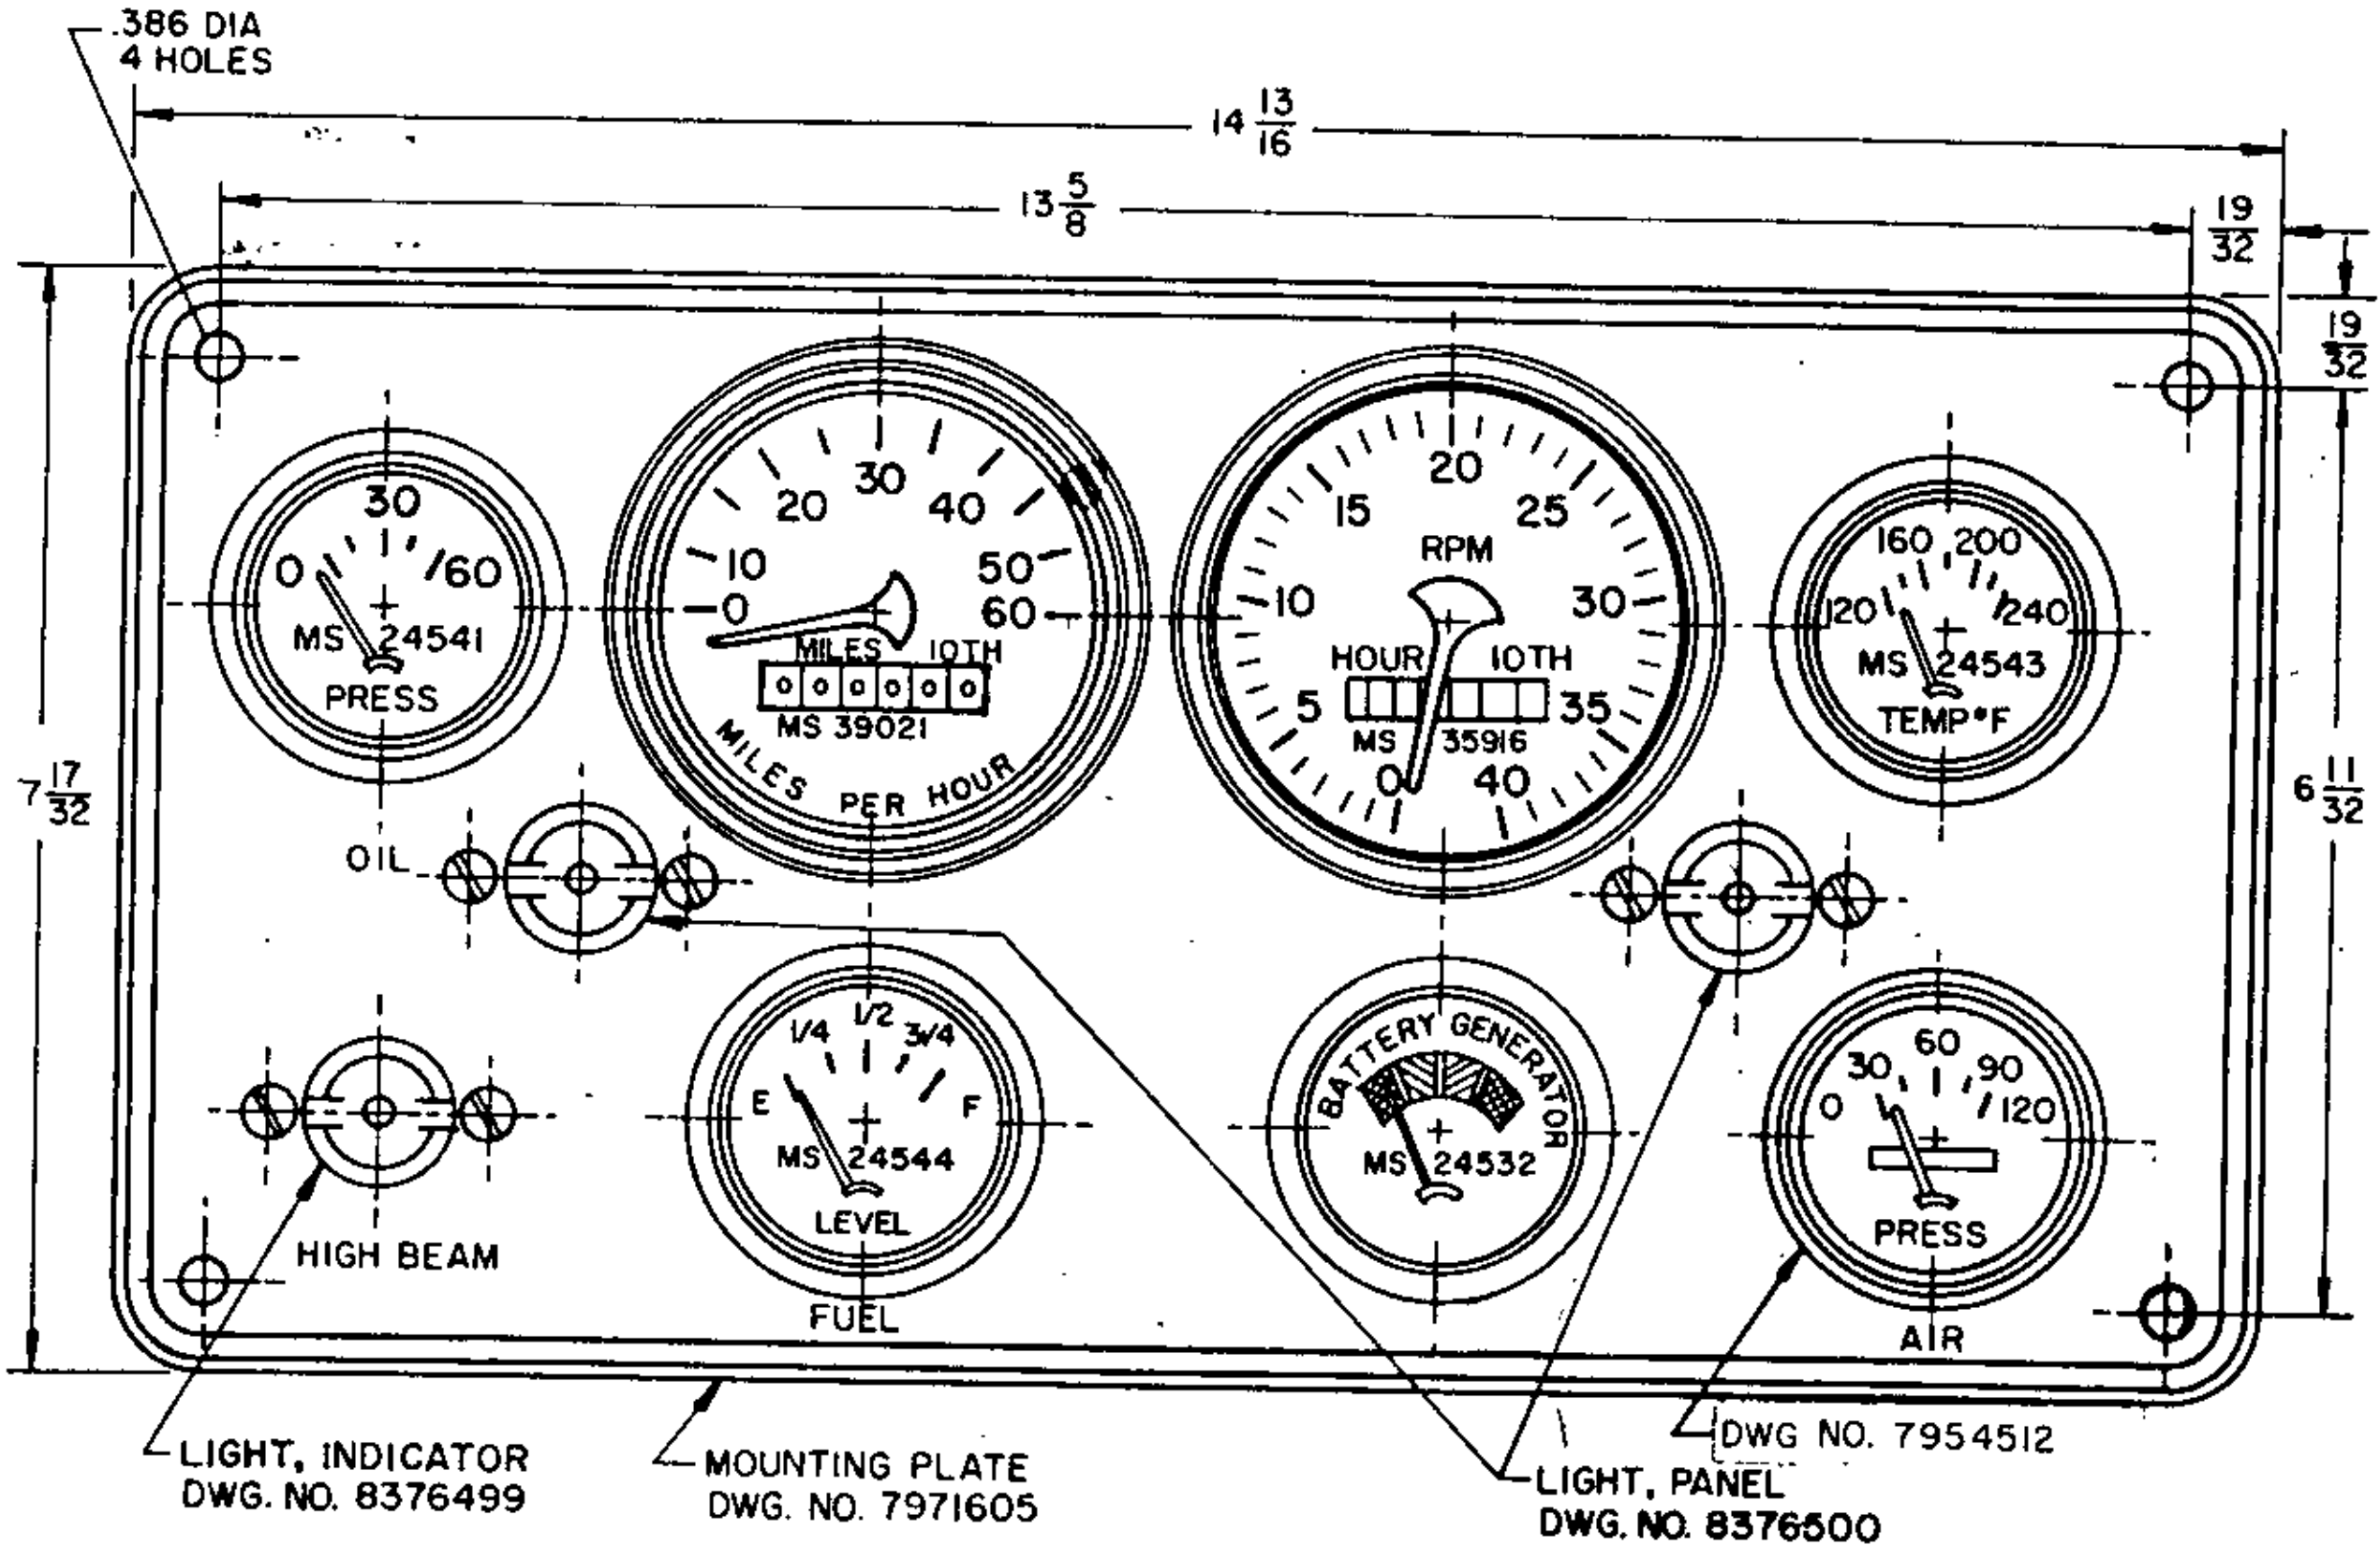
.386 DIA
4 HOLES
14 13/16
13 5/8
19/32
19/32
7 17/32
6 11/32
0 30 60
MS 24541
PRESS
OIL
0 10 20 30 40 50 60
MILES 10TH
MS 39021
MILES PER HOUR
0 5 10 15 20 25 30 35 40
RPM
HOUR 10TH
MS 35916
120 160 200 240
MS 24543
TEMP°F
HIGH BEAM
E 1/4 1/2 3/4 F
MS 24544
LEVEL
FUEL
BATTERY GENERATOR
MS 24532
0 30 60 90 120
PRESS
AIR
LIGHT, INDICATOR
DWG. NO. 8376499
MOUNTING PLATE
DWG. NO. 7971605
LIGHT, PANEL
DWG. NO. 8376500
DWG NO. 7954512

MS PART NO.	INDICATOR DIAL TYPE
MS 53003-1	CANCELLED
MS53003-2	NONLUMIN

Ⓓ CANCELLED AFTER 27 JUNE 1980.
NO SUPERSEDING STANDARD.

NOTES:

1. FOR USE ON ALL VEH [illegible] ONS OR MORE TO AND INCLUDING TEN (10) TONS CAPACITY.
2. FOR DESIGN F [illegible] IS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS [illegible]
3. REFER [illegible] INGS M [illegible] E OBTAINED FROM THE U.S.ARMY TANK-AUTOMOTIVE COMMAND, WAR [illegible] GAN 48090.

APPROVED 16 DECEMBER 1961 REVISED Ⓐ 10 JUNE 1965 Ⓑ 12 MARCH 1968 Ⓒ 15 AUGUST 1969 Ⓓ 27 JUNE 1980

This military standard is approved by the U. S. Army Tank-Automotive Command, Department of the Army, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. ARMY-AT Other Cust	TITLE INSTRUMENT CLUSTER: AUTOMOTIVE, TACTICAL WHEELED VEHICLE, 5 TO 10 TONS CAPACITY (WITH AIR)	MILITARY STANDARD MS53003(AT)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coo[illegible] [illegible] editions of this form are obsolete.)

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:19Z
Check the source to verify that this is the current version before use.