FED. SUP CLASS
2530

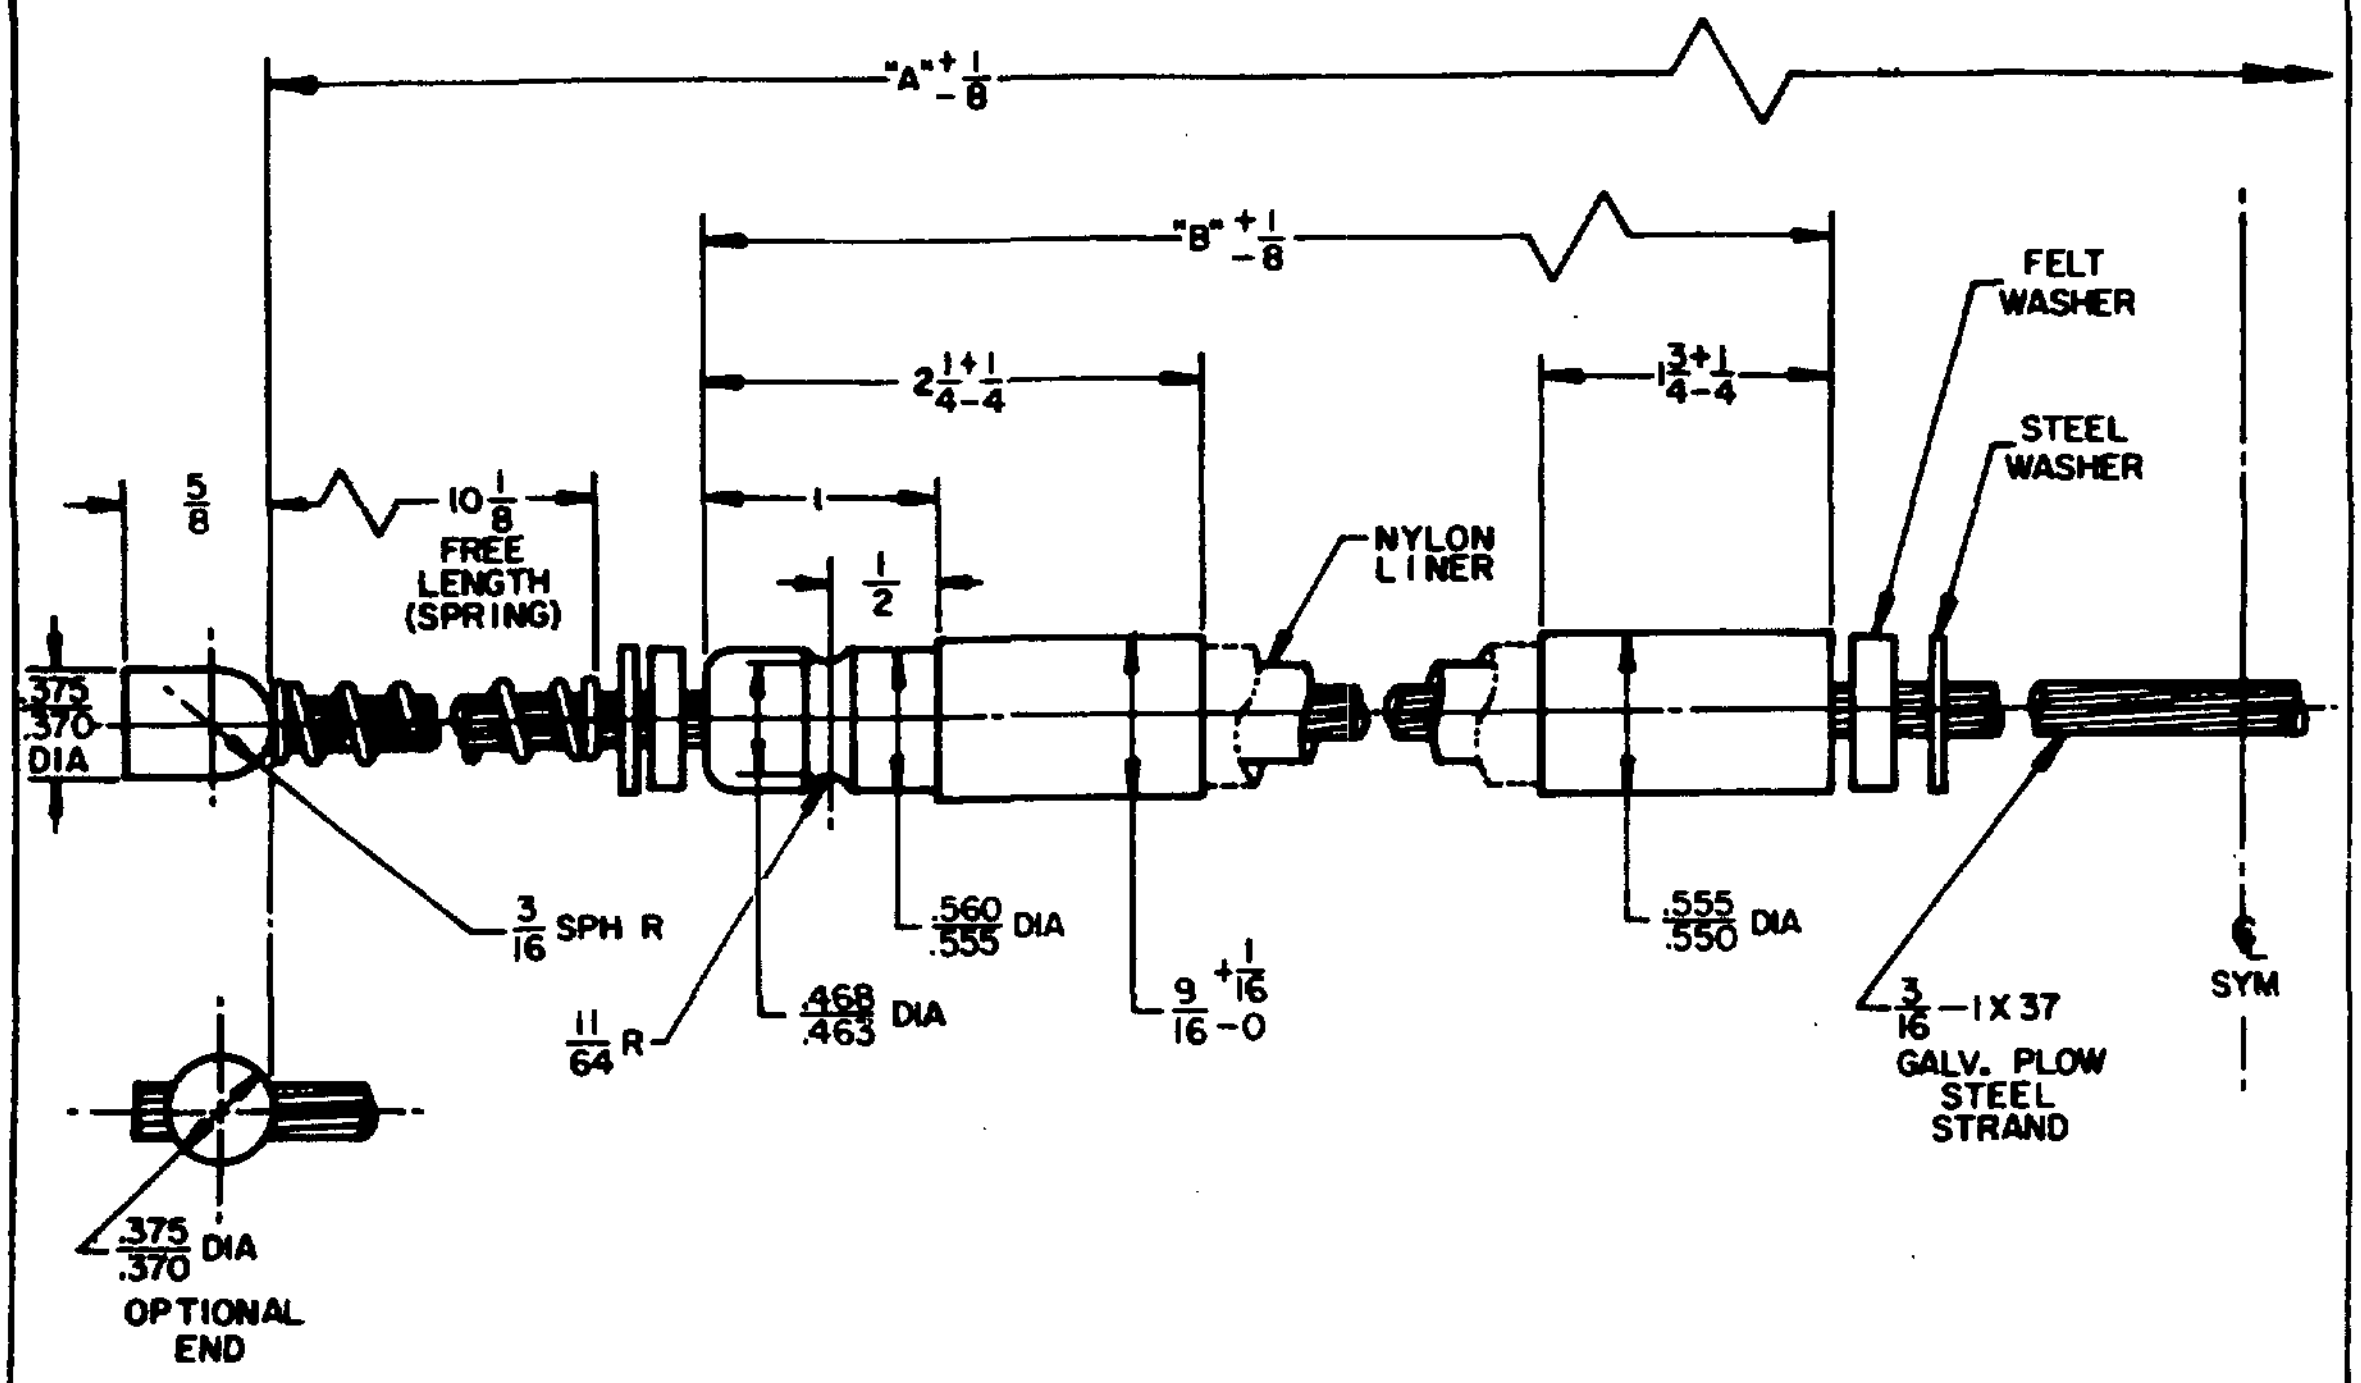

MS PART NO	FORMER PART NO	"A" DIM	"B" DIM
MS 53058 −1	8688306	98−1/4	23
MS 53058 −2	8686818	109−1/2	26−7/8
MS 53058 −3	8688306	162−1/4	55

NOTES:

1. THE CABLE ASSEMBLY SHALL BE CAPABLE OF WITHSTANDING A LOAD OF 2000 LBS. SUSTAINED FOR A PERIOD OF TWO HOURS WITH A MAXIMUM PERMISSIBLE SLIPPAGE OF EACH END FITTING WITH RESPECT TO THE CABLE OF FIFTEEN THOUSANDTHS (.015) OF AN INCH.
2. EACH CABLE ASSEMBLY TO BE PRE-STRETCHED UNDER A LOAD OF 1000 LBS.
3. CONDUIT SHALL BE PACKED AT ASSEMBLY WITH GREASE PER SPECIFICATION MIL-G-3278.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE, ± 1/32 ON FRACTIONS, ± .010 ON DECIMALS.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURERS IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

APPROVED 9 AUG 1963 REVISED Ⓐ 16 DEC 1964

Ⓐ ENTIRE STANDARD REVISED

This standard has been approved by the Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P.A. MO (ATAC)
Other Cust

TITLE
CABLE AND CONDUIT ASSEMBLY,
PARKING BRAKE—LOOP TYPE,
BUTTON END FITTING

MILITARY STANDARD
MS 53058 (MO)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:20Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE