[INCH-POUND]
A-A-224C
June 1, 1993
(TO SUPERSEDE)
A-A-224B
March 23, 1987

# COMMERCIAL ITEM DESCRIPTION

## HINGE, TEE

The General Services Admisitration has authorized the use of this commercial item description.

## 1. SCOPE AND CLASSIFICATION

1.1 Scope. This commercial item description covers commercial and industrial quality surface mounted tee hinges with nonremovable hinge pins.

1.2 Classification. The tee hinges shall be of the following types, grades, and sizes.

Type I, Grade 2, Light Tee Hinges

Size 1 - 3 inch (76 mm)
Size 2 - 4 inch (102 mm)
Size 3 - 6 inch (152 mm)

Type II, Grade 1, Heavy Tee Hinges

Size 4 - 4 inch (102 mm)
Size 5 - 6 inch (152 mm)
Size 6 - 8 inch (203 mm)

**Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102.**

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

## 2. APPLICABLE DOCUMENTS

2.1 The documents referenced in this commercial item description shall be the issues in effect on the date of the invitation for bids or request for proposals unless otherwise specified. These documents form a part of this commercial item description to the extent specified. In the event of a conflict between this commercial item description and a document referenced herein, this commercial item description shall take precedence.

Federal Standard:

FED-STD-376 - Preferred Metric Units For General Use By The Federal Government.

Copies of Federal standards are available from the General Services Administration Business Service Centers in Boston, MA; New York, NY; Philadelphia, PA; Washington, DC; Atlanta, GA; Chicago, IL; Kansas City, MO; Fort Worth, TX; Denver, CO; San Francisco, CA; Los Angeles, CA; and Seattle, WA.

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

Copies of military standards may be obtained from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

ASTM Standards:

A153 - Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
E29 - Standard Practice For Using Significant Digits In Test Data To Determine Conformance With Specifications.

Application for copies of ASTM standards should be addressed to ASTM, 1916 Race Street, Philadelphia, PA 19103.

ANSI/BHMA Standards:

A156.18 - American National Standards for materials and finishes.
A156.20 - American National Standards for strap and tee hinges and hasps.

Application for copies of ANSI/BHMA standards should be addressed to Builders Hardware Manufacturers Association, Inc. 60 East 42nd St., New York, New York 10165.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

## 3. SALIENT CHARACTERISTICS

3.1 Design. The construction of the hinges covered by this commercial item description shall be in accordance with ANSI/BHMA A156.20. The hinges shall be tee type with nonremovable pins. Hinges supplied in accordance with this commercial item description shall be in accordance with ANSI/BHMA A156.20 identifying numbers A82222 and A82221 in the sizes shown. Grade 1 and 2 shall be in accordance with ANSI/BHMA A156.20 Grade 1 and 2. Hinges listed are the most often procured by the Government; other materials, grades, sizes, and finishes may be specified in the procurement document. Hinges shall be of the types, grades, and sizes shown.

3.2 Size. Hinges shall be supplied in the size specified. Size shall be determined by the overall length of the hinge closed. Length closed may be measured as overall closed length or from the center of the hinge pin to the opposite end.

3.3 Finish. Unless otherwise specified, the surface of the hinge shall be electroplated zinc coated in accordance with finish code 603 of ANSI/BHMA A156.18. The finish shall be tested in accordance with ANSI/BHMA A156.20 or A156.18, as applicable. When specified, the hinges shall be hot dipped galvanized in accordance with ASTM A153.

3.4 Pins. The brass hinge pin shall be spun, riveted, or otherwise made fast (nonremovable).

3.5 Hardware. All fasteners required for attachment, as specified in ANSI/BHMA A156.20, shall be included with the hinges. Hardware furnished shall be of suitable size and shall be compatible with the finish of the hinge.

3.6 Workmanship. The hinges furnished shall be free from sharp edges, cracks, burrs and imperfections which may impair durability or serviceability.

3.7 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 (as amended) to the maximum extent practicable.

3.8 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of FED-STD-376, and all other requirements of this commercial item description are met.

3.9 Measurement system. The values stated in inch-pound units are to be regarded as the standard. The metric values stated in parentheses are for information purposes only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

3.10 Commercial item. The use of the term "commercial item description" in this document does not imply that any item or items offered are not required to conform with all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling. The levels of inspection and acceptable quality levels (AQL's) shall be in accordance with MIL-STD-105.

4.3 Lot formation. All hinges of the same type, grade, finish and size from the same manufacturer offered for delivery at one time shall be considered a lot for purposes of inspection.

4.4 Sampling for visual and dimensional examination. A random sample of hinges shall be selected from each lot in accordance with inspection level S-3, AQL 2.5 expressed in terms of percent defective. The sample unit shall be one hinge.

4.5 Visual and dimensional examination. The sample hinges shall be visually and dimensionally examined to verify compliance with this description. Tolerance limits specified are absolute limits as defined in ASTM E29.

4.6 Testing for permanent set and finish. Three sample hinges shall be randomly selected from each production lot and tested for conformance with the permanent set and finish requirements specified in ANSI/BHMA A156.20. Failure of any hinge to conform with specified requirements shall constitute rejection of the lot.

4.7 Certification of performance test requirements. A certificate of conformance may be furnished in lieu of actual testing on a lot by lot basis providing that:

(1) The product was manufactured domestically (United States).
(2) Objective evidence that the product offered has been tested to establish conformance with specified performance requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

(3) Tests specified in the industry standards referenced herein have been performed by a test facility acceptable to the Government.
(4) The product being offered is the same type, grade and material, and has been manufactured using the same material, processes and manufacturing techniques as the product tested.

In the event that conditions 2 thru 4 specified above are not met, testing shall be performed to establish conformance. If the contractor's source for product varies or if the product is of foreign manufacture, then testing must be performed on each inspection lot. Finish testing shall be performed on a lot by lot basis regardless of source of manufacture or above conditions.

4.8 Examination for preparation for delivery. A random sample of unit, intermediate and shipping containers (as applicable) shall be selected from each lot and examined for conformance with the preservation, packaging, packing, labeling and marking required in the contract or order. Samples shall be selected in accordance with Inspection level S-2, AQL 6.5 expressed in terms of defects per hundred units. The sample unit shall be one shipping container.

## 5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or order.

## 6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents (if applicable).

a. Title, number and date of this commercial item description.
b. Type, grade, size and finish.
c. The packaging, packing, and marking desired.


6.2 Part Numbering. Hinges conforming with this commercial item description shall be identified by a part number configuration consisting of identification of a portion of the specification number, type, grade and size. An example of the part number configuration is shown below. This part numbering system is intended for identification and cross-indexing of the item within the Federal cataloging system. Part numbers are not required to be placed on the product or container.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

Part Numbering System for Commercial Item Description A-A-224:

(Example: AA224, Type II, Size 1)

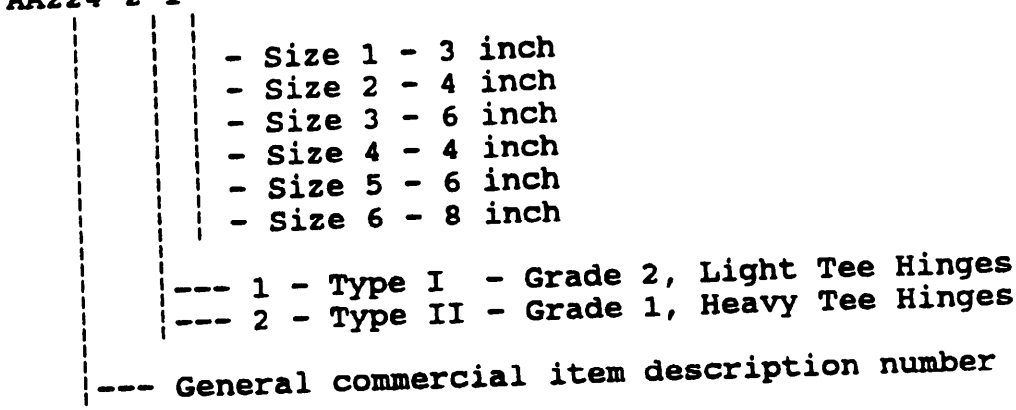


MILITARY INTERESTS:

Assignee Activity:

DLA - IS

Review Activity:

DLA - IS

CIVIL AGENCY COORDINATING ACTIVITIES:

VA - VOC
NASA - JFK

PREPARING ACTIVITY:

GSA - FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.