The documentation and process conversion measures necessary to comply with this document shall be completed by 30 April 2023.

INCH-POUND

MIL-PRF-19500/551H
w/AMENDMENT 1
30 December 2022
SUPERSEDING
MIL-PRF-19500/551H
4 December 2017

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, TRANSIENT VOLTAGE SUPPRESSOR
TYPES 1N6461 THROUGH 1N6468, 1N6461US THROUGH 1N6468US, AND
1N6461URS THROUGH 1N6468URS,
QUALITY LEVELS JAN, JANTX, AND JANTXV

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for 500-watt peak pulse, power, silicon, transient voltage suppressor diodes. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. The device packages for the encapsulated device type are as follows: Axial leaded in accordance with figure 1, square end-cap (US) surface mount version in accordance with figure 2, and round and square end-cap (URS) surface mount version in accordance with figure 3.

1.3 Maximum ratings. Maximum ratings are as shown in columns 4, 6, and 7 of the electrical characteristics table herein and as follows:

a. P_R = 2.5 W (T_A = room ambient as defined in the general requirements of 4.5 of MIL-STD-750). Derate at 16.7 mW/°C for leaded devices and 50 mW/°C for surface mount devices (see figure 4).

b. P_{PR} = 500 W (see figure 5) at t_P = 1 ms.

c. I_{FSM} = 80 A(pk) at t_P = 8.33 ms (T_A = +25°C).

d. -55°C ≤ T_{OP} ≤ +175°C; -55°C ≤ T_{STG} ≤ +175°C (ambient).

1.4 Primary electrical characteristics. Primary electrical characteristic columns 2 and 4 of the electrical characteristics table herein.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, ATTN: VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil .

AMSC N/A
FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

1.5 Part or Identifying Number (PIN). The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example and 6.5 for a list of available PINs.

1.5.1 JAN certification mark and quality level for encapsulated devices. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", and "JANTXV".

1.5.2 Device type. The designation system for the device types of semiconductors covered by this specification sheet are as follows.

1.5.2.1 First number and first letter symbols. The semiconductors of this specification sheet use the first number and letter symbols "1N".

1.5.2.2 Second number symbols. The second number symbols for the semiconductor covered by this specification sheet are as follows: "6461", "6462","6463", "6464","6465", "6466", "6467", and "6468".

1.5.3 Suffix symbols. The following suffix symbols are incorporated in the PIN for this specification sheet:

	A blank suffix symbol indicates a through-hole mount axial leaded package (see figure 1).
US	Indicates a surface mount package with square end-caps (see figure 2).
URS	Indicates a surface mount package with one round end-cap and one square end-cap (see figure 3).

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QML-19500.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.


DEPARTMENT OF DEFENSE STANDARDS


MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil).

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

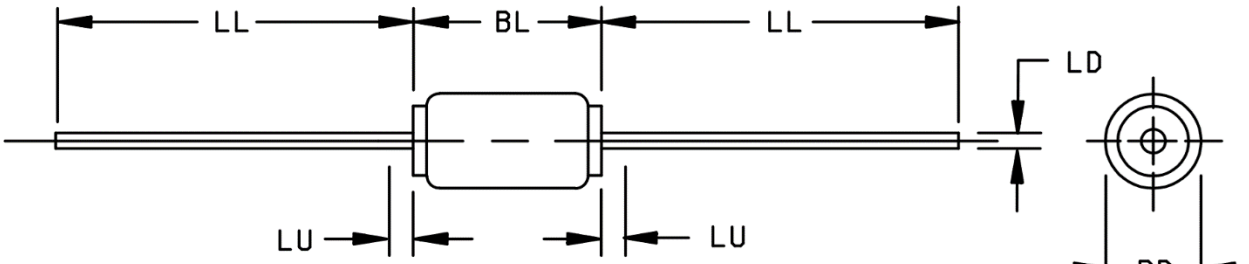




SCHEMATIC SYMBOL

Symbol	Dimension				Notes
	Inch	Inch	mm	mm	
	Min	Max	Min	Max	
BD	.115	.145	2.92	3.68	3, 4
BL	.150	.300	3.81	7.62	4
LD	.037	.042	0.94	1.07	4
LL	.900	1.300	22.86	33.02	
LU		.050		1.27	4

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Dimension BD shall be measured at the largest diameter.
4. Dimension BL includes dimension LU region in which the diameter may vary from BD maximum to LD minimum.
5. Package contour optional within dimensions BD and BL. Heat slugs, if any, shall be included within this cylinder length but shall not be subject to minimum limit of dimension BD.

FIGURE 1. Physical dimensions of axial leaded package (for non-surface mount devices only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

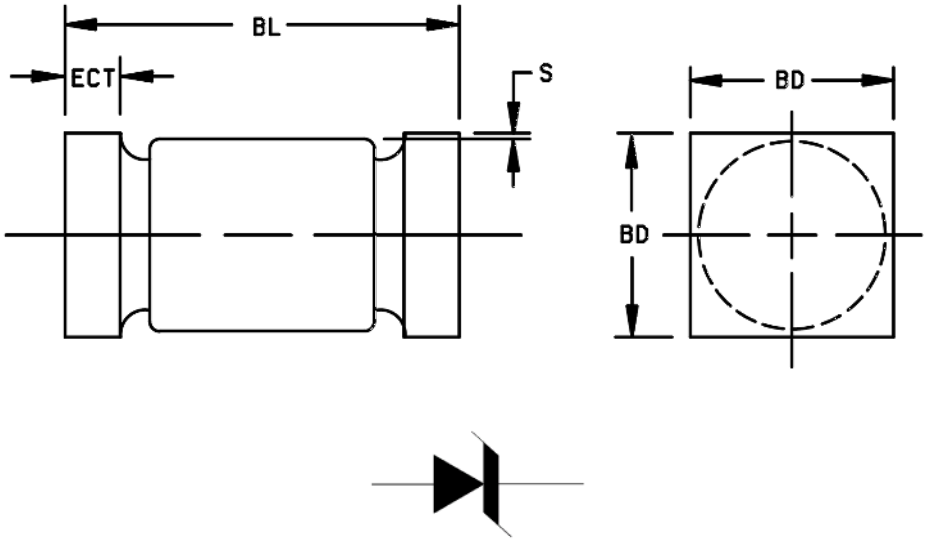


SCHEMATIC SYMBOL

Symbol	Dimensions			
	Inches	Inches	mm	mm
	Min	Max	Min	Max
BD	.137	.148	3.48	3.76
BL	.200	.225	5.08	5.72
ECT	.019	.028	0.48	0.71
S	.003		0.08	

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.

FIGURE 2. Physical dimensions for square end-cap (US) surface mount package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

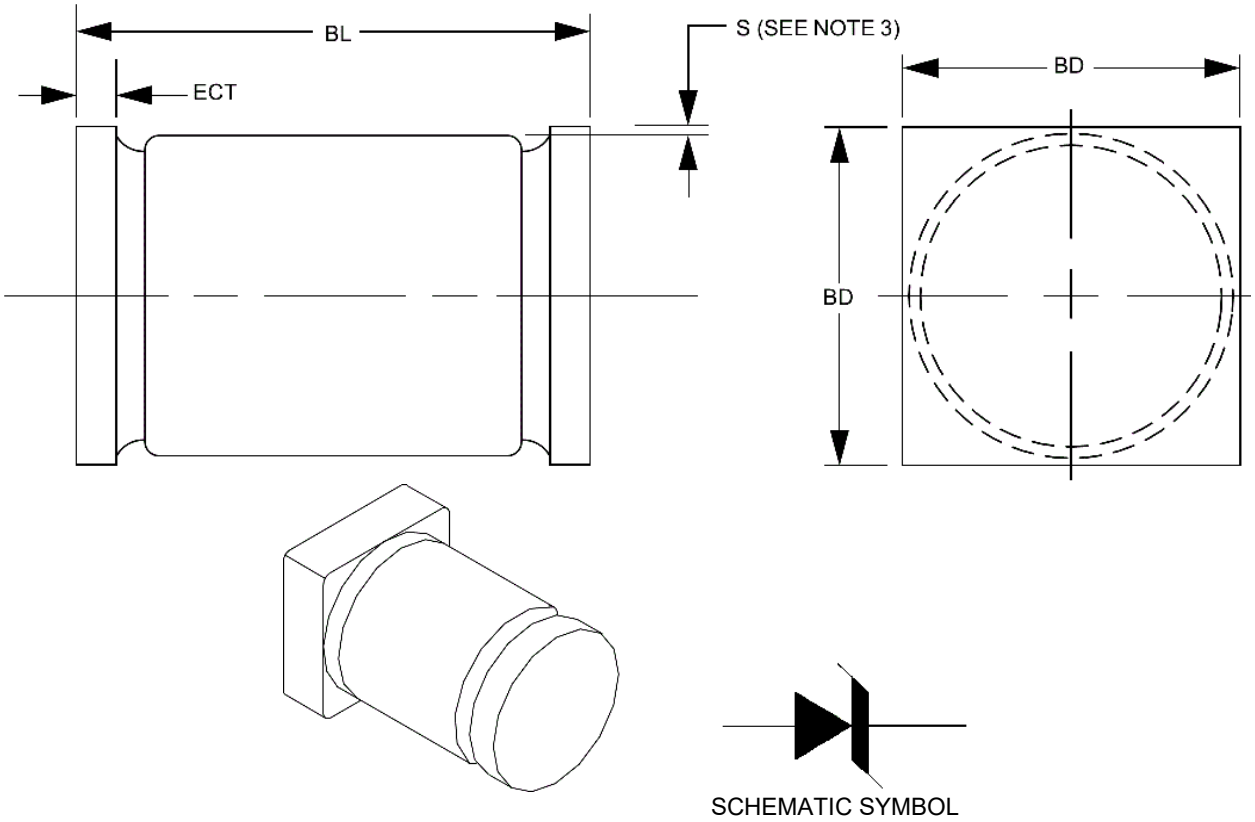

	Dimensions			
Symbol	Inches	Inches	mm	mm
	Min	Max	Min	Max
BD	.137	.148	3.48	3.76
BL	.200	.225	5.08	5.72
ECT	.019	.028	0.48	0.71
S	.003		0.08	

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. One end-cap shall be square and the other end-cap shall be round.
3. Minimum clearance of glass body to mounting surface on all orientations.
4. Dimensions are pre-solder dip.
5. The cathode shall be connected to the round endcap.

FIGURE 3. Physical dimensions of round and square end-cap surface mount (URS) package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturers list before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

I_P	Maximum peak pulse current at a specified condition.
I_{PP}	Peak pulse current at a specified condition.
$I_{(BR)}$	Reverse breakdown current at a specified condition.
PPP	Repetitive peak pulse power.
T_{EC}	End-cap temperature.
V_C	Clamping voltage. The maximum peak voltage appearing across the device when subjected to the peak pulse current I_{PP}.

3.4 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figures 1, 2, and 3 herein.

3.4.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4.2 Construction. These devices shall be constructed to comply with the requirements of a category I metallurgical bond of MIL-PRF-19500, and herein. The surface mount devices (US and URS version devices) shall be structurally identical to the axial leaded device except for lead terminations. The surface mount URS version device shall be considered structurally identical to the US version except for end-cap shape, where one end-cap shall be square and the other end-cap shall be round. For URS version devices only, the cathode shall be connected to the round end-cap.

3.5 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5.1 Marking of US and URS versions. For US versions only, all marking except for polarity may be omitted from the device. For URS versions only, all marking may be omitted from the device. All marking which is omitted from the body of the devices shall appear on the label of the initial container.

3.5.2 Polarity. The polarity of all types except URS shall be indicated with a contrasting color band to denote the cathode end. Alternately, for US version surface mount devices, a minimum of three evenly spaced contrasting color dots around the periphery of the cathode end may be used. No color coding shall be acceptable. At the option of the manufacturer, US and URS devices may include laser marking on an end-cap, to include PIN and lot date code for all levels. The prefixes JAN, JANTX, or JANTXV may be abbreviated as J, JX, or JV respectively. (For example: The PIN may be reduced to JV6461).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 1.3 and table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4 and tables I, II, and III).

4.1.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500, and as specified herein. Lot accumulation period shall be 3 months in lieu of 6 weeks.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not require the performance of table III tests, the tests specified in table III herein that were not performed in the prior revision shall be performed on the first inspection lot of this revision to maintain qualification.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurement for JANTX and JANTXV levels
9	Not applicable
11	Not applicable
12	See 4.3.1
13	Not applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

4.3.1 Burn-in (HTRB) and steady-state operation life conditions. These tests shall be conducted with the devices subjected to test conditions in the following order of events and conditions:

a. Pulse in accordance with 4.5.2b herein. Pulse 20 times for screening and group B operation life test and 100 times for group C at T_A = room ambient as defined in the general requirements of MIL-STD-750.

b. Read and record I_D and $V_{(BR)}$ at T_A = room ambient as defined in the general requirements of MIL-STD-750. Remove defective devices, and record the number of failures.

c. Apply the working peak reverse voltage (V_{RWM}) (column 4 of table II herein) at T_A = +125°C as follows:

(1) For 96 hours (JANTX and JANTXV) for the screening test.

(2) For 340 hours (JANTX and JANTXV) for group B, steady-state operation life test.

(3) For 1,000 hours for group C, steady-state operation life test.

d. Read and record I_D and $V_{(BR)}$ at T_A = room ambient as defined in the general requirements of MIL-STD-750. Devices with ΔI_D > 50 percent (100 percent for steady-state operation life) of initial value, or 20 percent of column 5 of table II, whichever is greater, or $\Delta V_{(BR)}$ = ±2 percent (±5 percent for steady-state operation life) of initial value shall be considered defective. Remove defective devices and record the number of failures.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and herein.

Subgroup	Method	Conditions
B3	1026	T_A = +125°C, (see 4.3.1).
B5	4081	$R_{\theta JL}$ ≤ 60°C/W at L = .375 inches (9.53 mm), non-surface mount devices; $R_{\theta JEC}$ ≤ 20°C/W at L = 0 inches for surface mount devices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and as follows.

Subgroup	Method	Conditions
C2	2036	Axial leaded devices only: Test condition A; weight = 12 pounds (5.44 Kg); t = 15 seconds minimum. Test condition E (Lead fatigue not applicable to US diodes).
C2	2038	US surface mount devices only: Tab pull: Test condition B, weight = 12 pounds (5.44 Kg); t = 15 seconds. Suitable fixtures may be used to pull the end-caps in a manner, which does not aid construction. (See figure 6 herein).
C5	4081	$R_{\theta JL}$ ≤ 60°C/W at L = .375 inches (9.53 mm), non-surface mount devices; $R_{\theta JEC}$ ≤ 20°C/W at L = 0 inches for surface mount devices.
C6	1026	T_A = +125°C, (see 4.3.1). Leaded samples from the same lot may be used in lieu of surface mount devices.
C7	4071	$I_{(BR)}$ = column 3 of table II, $\alpha V_{(BR)}$, T_1 = +25°C ±3°C; T_2 = +125°C ±3°C; maximum limits = column 8 of table II. Sample size: 22 devices, c = 0.
C8		See 4.5.2.a, ten pulses, sample size: 22 devices, c = 0.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-IX of MIL-PRF-19500, and table III herein. Electrical measurements (end-points) shall be in accordance with table I, subgroup 2 herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Maximum peak pulse current (I_{PP}). The peak pulse currents specified in column 7 of table II shall be applied in the reverse direction while simultaneously maintaining a reverse bias voltage of not less than the applicable voltage specified in column 4 of table II. The clamping voltage (V_C) shall be as specified in 4.5.3. The pulse current shall be applied with a current versus time waveform as follows (one pulse per minute maximum):

a. Pulse current shall reach 100 percent of I_{PP} at t ≤ 8 µs and decay to 50 percent at t ≥ 20 µs for t_P = 20 µs (see figure 7).

b. Pulse current shall reach 100 percent of I_{PP} at t ≤ 10 µs and decay to 50 percent at t ≥ 1 ms for t_P = 1 ms (see figure 8).

NOTE: Tolerance on pulse time shall be ±10 percent.

4.5.3 Clamping voltage (V_C). The peak pulse clamping voltage shall be measured across the diode in a 1 ms time interval. The response detector shall demonstrate equipment accuracy of ±3 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Standby current	4016	Condition A or B; $V_R = V_{RWM}$ (column 4 of table II)	I_D		Column 5 of table II	µA dc
Breakdown voltage	4022	$t_P \leq 300$ ms, duty cycle ≤ 2 percent; $I_{(BR)}$ = column 3 of table II	$V_{(BR)1}$	Column 2 of table II		V dc
Forward voltage	4011	Condition B, I_F = 1 A dc	V_F		1.5	V (pk)
Subgroup 3						
Low temperature operation		T_A = -55°C				
Breakdown voltage	4022	$t_P \leq 300$ ms, duty cycle ≤ 2 percent; $I_{(BR)}$ = column 3 of table II.	$V_{(BR)2}$	Column 9 of table II		V dc
Subgroup 4						
Clamping voltage (see 4.5.3)		t_P = 1.0 ms (see 4.5.2.b) I_{PP} = column 7 of table II	V_C		Column 6 of table II	V (pk)
Subgroup 5						
Not applicable						
Subgroup 6						
Forward surge current	4066	Condition A, One pulse, half sine wave 8.3 ms; I_F = 0, V_{RWM} = 0, T_A = +25°C	I_{FSM}		80	A (pk)
Subgroup 7						
Clamping voltage inverse polarity maximum (see 4.5.3)		t_P = 1.0 ms (see 4.5.2.b) except use forward direction current without prior bias voltage	$-V_C$		Column 11 of table II	V (pk)

1/ For sampling plan, see MIL-PRF-19500.
2/ Column references are to table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics. 1/

Col 1	Col 2	Col 3	Col 4	Col 5	Col 6	Col 7	Col 7	Col 8	Col 9	Col 10	Col 11
Type	$V_{(BR)1}$ at $I_{(BR)}$	$I_{(BR)}$	V_{RWM}	I_D at V_{RWM}	V_C at I_{PP} for t_p = 1 ms	I_{PP} t_p = 20 µs t_r = 8 µs	I_{PP} t_p = 1 ms t_r = 10 µs	$\alpha V_{(BR)}$	$V_{(BR)2}$ minimum at I_{BR} T_A = -55°C	I_{RM} maximum dc current T_A = + 25°C	-V_C at t_p = 1 ms A(pk) = in accordance with column 7 inverse polarity
	V dc	mA dc	V (pk)	µA dc	V (pk)	A (pk)	A (pk)	%/°C	V dc	mA	V(pk)
1N6461	5.6	25	5	3,000	9.0	315	56	-0.03, +0.045	5.4	367	-3.5
1N6462	6.5	20	6	2,500	11.0	258	46	+0.060	6.2	304	-3.2
1N6463	13.6	5	12	500	22.6	125	22	+0.085	13.0	139	-3.8
1N6464	16.4	5	15	500	26.5	107	19	+0.085	15.6	63	-3.8
1N6465	27.0	2	24	50	41.4	69	12	+0.096	25.1	39	-3.6
1N6466	33.0	1	30.5	3	47.5	63	11	+0.098	30.2	34	-3.6
1N6467	43.7	1	40.3	2	63.5	45	8	+0.101	40.0	46	-3.5
1N6468	54.0	1	51.6	2	78.5	35	6	+0.103	48.5	20	-3.4

1/ These limits apply to the US and URS device types also.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

TABLE III. Group E inspection (all quality levels) for qualification or re-qualification only.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			45 devices, c = 0
Temperature cycling	1051	500 cycles, condition C, -55°C to +175°C	
Electrical measurements		See table I, subgroup 2	
Subgroup 2			22 devices, c = 0
Life test	1048	1,000 hours. See 4.3.1	
Electrical measurements		See table I, subgroup 2	
Subgroups 3, 4 and 5			
Not applicable			
Subgroup 8			
Peak pulse current		See 4.5.2. I_{PP} shall be characterized by the supplier and this data shall be available to the Government. Test shall be performed on each low and high voltage device for each structurally identical grouping. Test to failure.	
Electrical measurements		See table I, subgroup 2	
Subgroup 9			
Resistance to glass cracking	1057	Condition B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

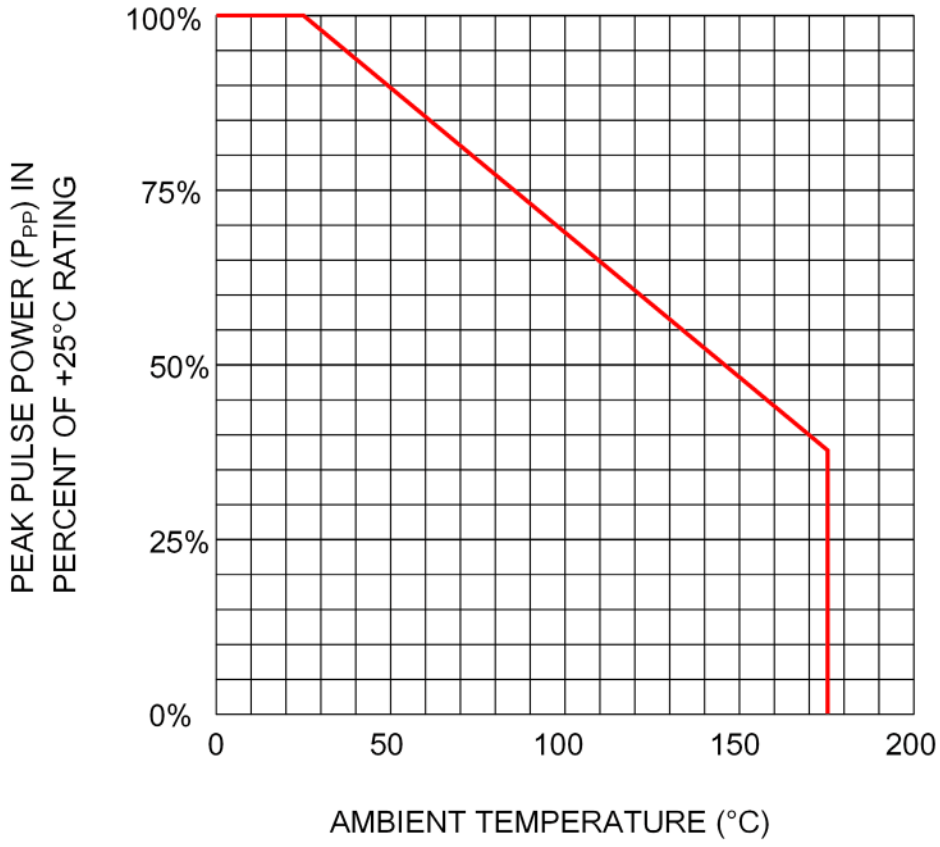


FIGURE 4. Derating curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

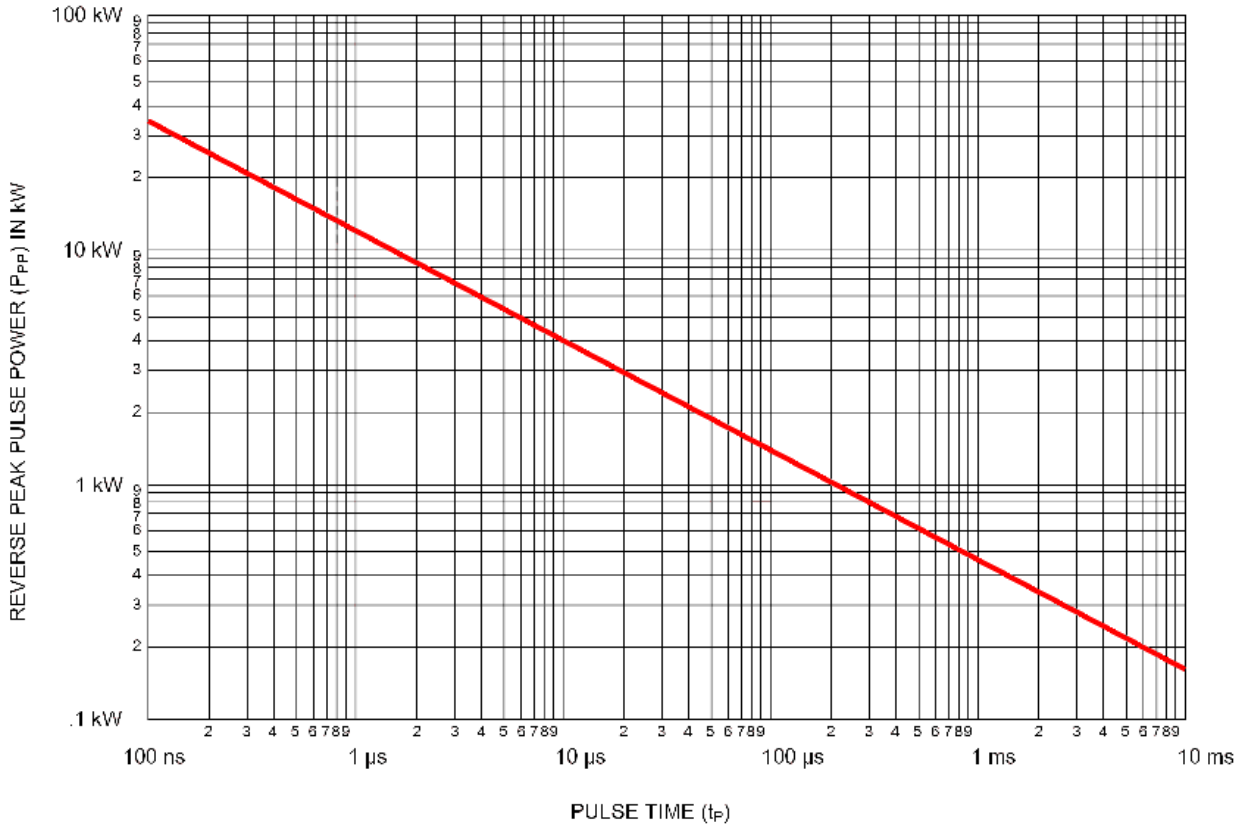


FIGURE 5. Peak pulse power versus pulse time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

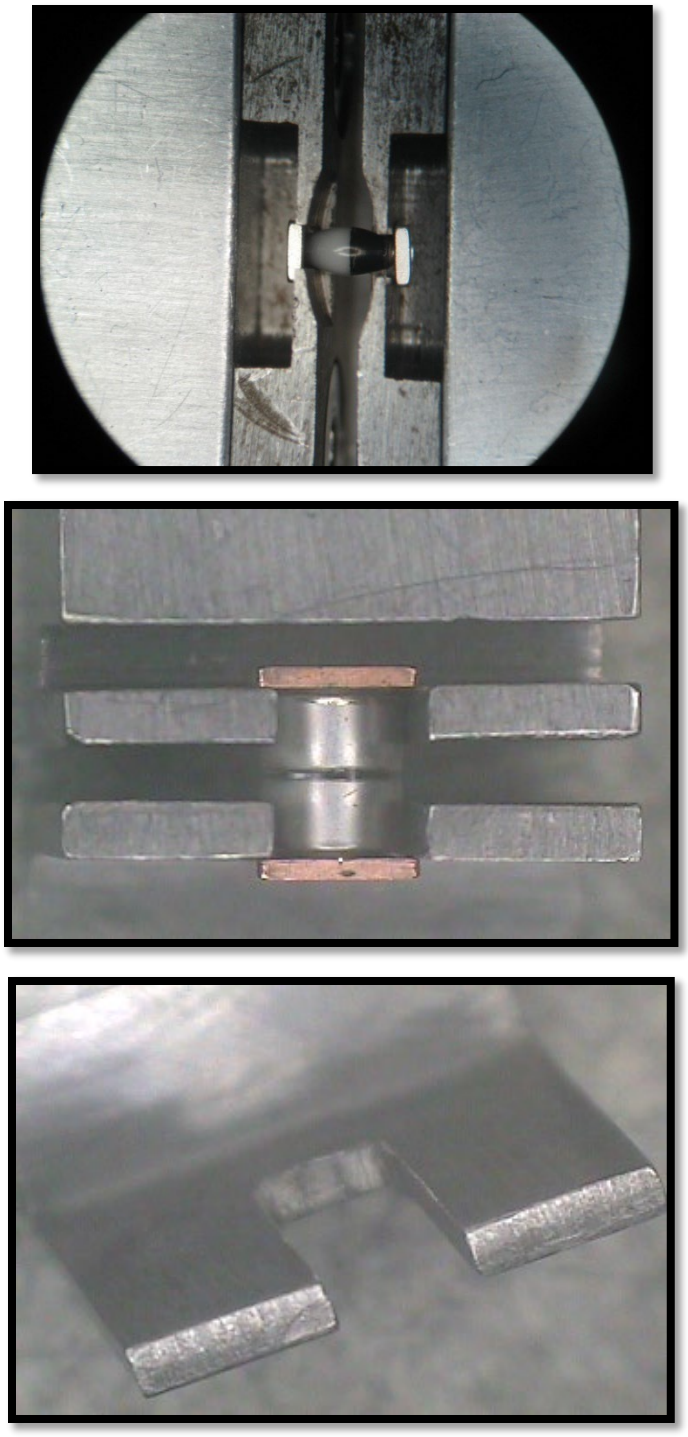


FIGURE 6. URS terminal strength mounting (US suffix shown).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

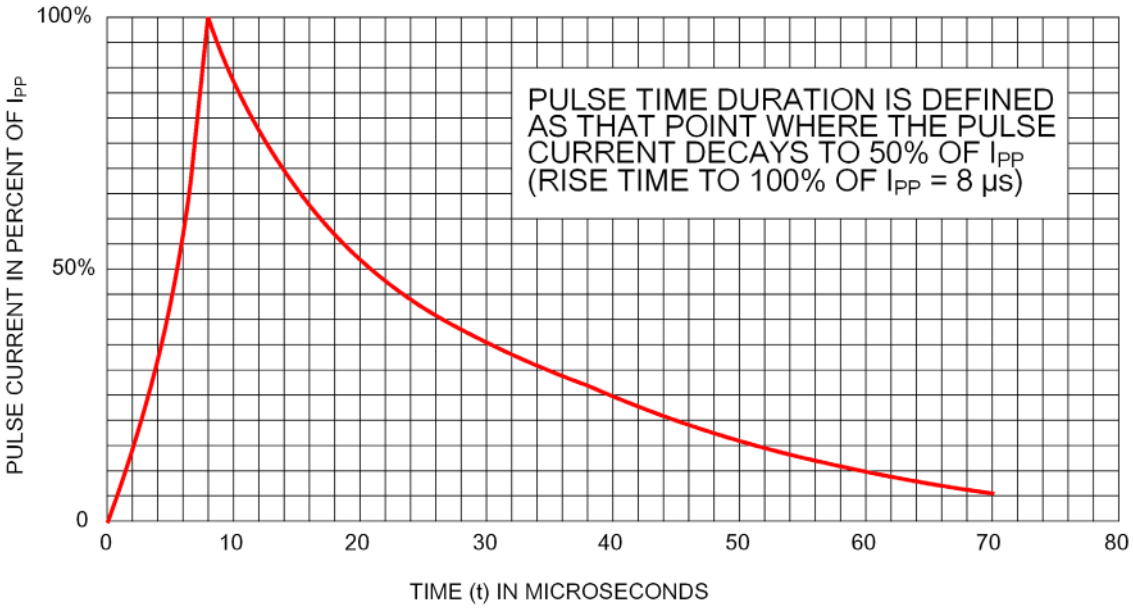


FIGURE 7. Current impulse waveform.

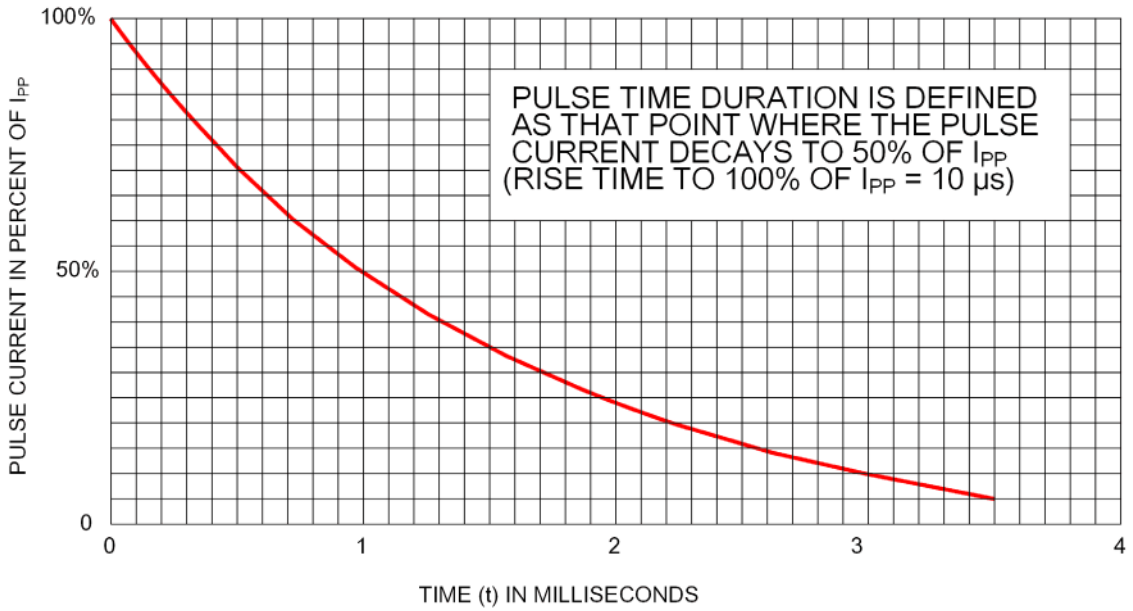


FIGURE 8. Current impulse waveform.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Lead finish (see 3.4.1).


c. Packaging requirements (see 5.1).

d. The complete PIN, see 1.5 and 6.4 herein.

e. Destructive physical analysis when requested.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil. An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs for encapsulated devices are constructed using the following form.

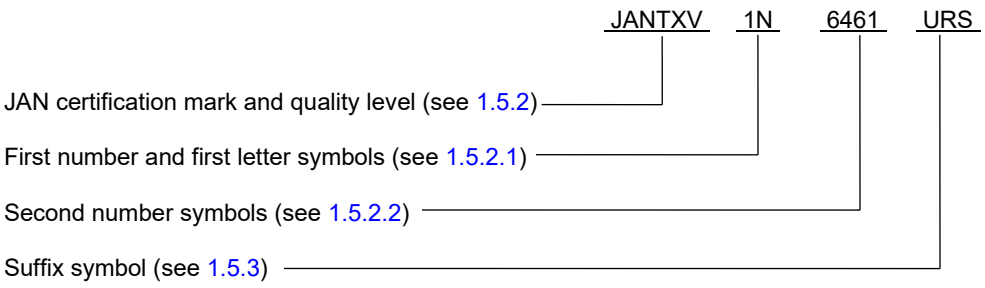

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

6.5 List of PINs for encapsulated devices. The following is a list of possible PINs for encapsulated devices available on this specification sheet.

PINs for devices of the base quality level	PINs for devices of the "TX" quality level	PINs for devices of the "TXV" quality level
JAN1N6461	JANTX1N6461	JANTXV1N6461
JAN1N6462	JANTX1N6462	JANTXV1N6462
JAN1N6463	JANTX1N6463	JANTXV1N6463
JAN1N6464	JANTX1N6464	JANTXV1N6464
JAN1N6465	JANTX1N6465	JANTXV1N6465
JAN1N6466	JANTX1N6466	JANTXV1N6466
JAN1N6467	JANTX1N6467	JANTXV1N6467
JAN1N6468	JANTX1N6468	JANTXV1N6468
JAN1N6461US	JANTX1N6461US	JANTXV1N6461US
JAN1N6462US	JANTX1N6462US	JANTXV1N6462US
JAN1N6463US	JANTX1N6463US	JANTXV1N6463US
JAN1N6464US	JANTX1N6464US	JANTXV1N6464US
JAN1N6465US	JANTX1N6465US	JANTXV1N6465US
JAN1N6466US	JANTX1N6466US	JANTXV1N6466US
JAN1N6467US	JANTX1N6467US	JANTXV1N6467US
JAN1N6468US	JANTX1N6468US	JANTXV1N6468US
JAN1N6461URS	JANTX1N6461URS	JANTXV1N6461URS
JAN1N6462URS	JANTX1N6462URS	JANTXV1N6462URS
JAN1N6463URS	JANTX1N6463URS	JANTXV1N6463URS
JAN1N6464URS	JANTX1N6464URS	JANTXV1N6464URS
JAN1N6465URS	JANTX1N6465URS	JANTXV1N6465URS
JAN1N6466URS	JANTX1N6466URS	JANTXV1N6466URS
JAN1N6467URS	JANTX1N6467URS	JANTXV1N6467URS
JAN1N6468URS	JANTX1N6468URS	JANTXV1N6468URS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.

6.6 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961-2022-090)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:10Z
Check the source to verify that this is the current version before use.