INCH-POUND

The documentation and process conversion measures necessary to comply with this document shall be completed by 27 January 2025.

MIL-PRF-19500/742C
w/AMENDMENT 1
27 August 2024
SUPERSEDING
MIL-PRF-19500/742C
12 July 2019

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, DIODE, SILICON, POWER RECTIFIER, ULTRAFAST RECOVERY, TYPES 1N5802CB, 1N5804CB, 1N5806CB, 1N5807CB, 1N5809CB, AND 1N5811CB, AXIAL LEADED AND SURFACE MOUNT PACKAGE, QUALITY LEVELS JAN, JANTX, AND JANTXV

Inactive for new design after 28 September 2009. See 6.6 for supersession data.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-19500.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon, fast recovery, power rectifier diodes. Three levels of product assurance (JAN, JANTX, and JANTXV) are provided for each encapsulated device type as specified in MIL-PRF-19500.

1.2 Package outlines. The device package outlines are as follows: An axial leaded package in accordance with figure 1 and square end-cap surface mount package in accordance with figure 2.

1.3 Maximum ratings. Unless otherwise specified, T_A = +25°C.

1.3.1 Ratings applicable to all Part or Identifying Numbers (PIN). $T_{STG} = T_{J(max)}$ = −65°C to +175°C.

1.3.2 Ratings applicable to individual types.

Col. 1	Col. 2	Col. 3	Col. 4	Col. 5	Col. 6	Col. 7	Col. 8	Col. 9
Types (1)	V_{RWM}	$I_{O(L)}$ T_L = +75°C L = .25 inch (6.35 mm) (2) (3)	I_{O1} T_A = +55°C (4) (5) (6)	I_{FSM} at +25°C operating at I_{O1} t_p = 8.3 ms	t_{rr}	$R_{\theta JL}$ at L = .375 inch (9.52 mm)	$R_{\theta JEC}$ (7)	$R_{\theta JX}$ (6)
	V	A	A	A(pk)	ns	°C/W	°C/W	°C/W
1N5802CB, CBUS	50	2.5	1.0	35	25	36	13	154
1N5804CB, CBUS	100	2.5	1.0	35	25	36	13	154
1N5806CB, CBUS	150	2.5	1.0	35	25	36	13	154
1N5807CB, CBUS	50	6.0	3.0	125	30	22	6.5	52
1N5809CB, CBUS	100	6.0	3.0	125	30	22	6.5	52
1N5811CB, CBUS	150	6.0	3.0	125	30	22	6.5	52

See notes on next page.

Comments, suggestions, or questions on this document should be addressed to DLA Land and Maritime, VAC, P.O. Box 3990, Columbus, OH 43218-3990, or emailed to Semiconductor@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A
FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

1.3.2 Ratings applicable to individual types - Continued.

(1) $T_{EC} = T_L$ at L = 0 or $T_{end\ tab}$ for US suffix devices.
(2) Derate at 24 mA/°C for T_L above +75°C for 2.5 amp ratings.
(3) Derate at 60 mA/°C for T_L above +75°C for 6.0 amp ratings.
(4) Derate at 8.33 mA/°C for T_A above +55°C for 1.0 amp ratings.
(5) Derate at 25 mA/°C for T_A above +55°C for 3.0 amp ratings.
(6) For the 1 and 3 amp ratings at 55°C, these I_O ratings are for a thermally (PC boards or other) mounting methods where the lead or end-cap temperatures cannot be maintained as shown in col. 3 and where thermal resistance from mounting point to ambient is still sufficiently controlled where $T_{J(MAX)}$ in 1.3.1 is not exceeded. This equates to $R_{\theta JX} \leq 154$°C/W for the 1N5802CB through 1N5806CB and $R_{\theta JX} \leq 52$°C/W for the 1N5807CB through 1N5811CB in column 9. Also see application notes in 6.7.1 thru 6.7.4.
(7) US suffix devices only.

1.4 Primary electrical characteristics. Unless otherwise specified, T_A = +25°C.

Types	V_{BR} at 100 µA pulse ≤ 20 ms	I_{R1} at $V_R = V_{RWM}$ T_A = +25°C pulsed $V_R \leq$ 20ms	I_{R2} at $V_R = V_{RWM}$ T_A = +125°C pulsed $V_R \leq$ 20ms
	V	µA	µA
1N5802CB, CBUS	60	1.0	175
1N5804CB, CBUS	110	1.0	175
1N5806CB, CBUS	160	1.0	175
1N5807CB, CBUS	60	5.0	525
1N5809CB, CBUS	110	5.0	525
1N5811CB, CBUS	160	5.0	525

1.5 PIN. The PIN is in accordance with MIL-PRF-19500, and as specified herein. See 6.4 for PIN construction example, 6.5 for a list of available PINs, and 6.6 for supersession information.

1.5.1 JAN certification mark and quality levels. The quality level designators for encapsulated devices that are applicable for this specification sheet from the lowest to the highest level are as follows: "JAN", "JANTX", and "JANTXV".

1.5.2 Device type. The designation system for the devices covered by this specification sheet is as follows.

1.5.2.1 First number and first letter symbols. The devices of this specification sheet use the first number and letter symbols "1N".


1.5.2.2 Second number symbols. The second number symbols for the devices covered by this specification sheet are as follows: "5802", "5804", "5806", "5807", "5809" and "5811".

1.5.3 Suffix symbols. The following suffix symbol(s) are incorporated into the PINs for this specification sheet.

CB	A "CB" designators identifies that the axial leaded device uses a non-cavity double plug construction with category III metallurgical bonds. This style of metallurgical bonding is known as a compression bond (CB).
CBUS	A "CBUS" designators identifies that the device is in a SMD package configuration.

1.5.4 Lead finish. The lead finishes applicable to this specification sheet are listed on QPDSIS-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

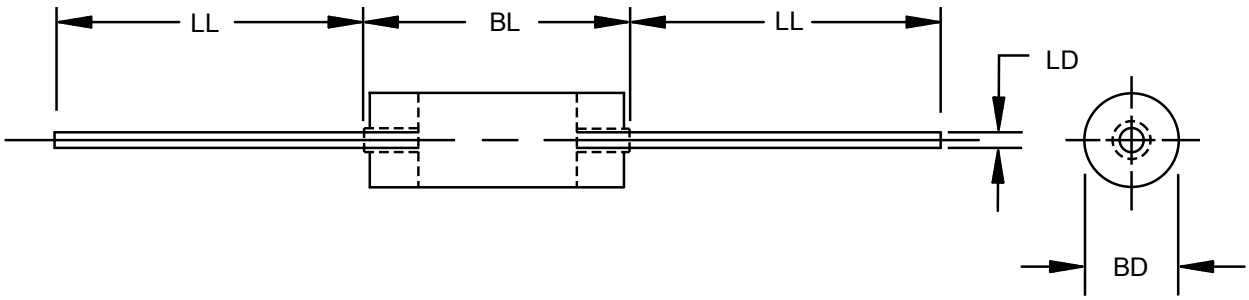


	Dimensions								
	1N5802CB, 1N5804CB, 1N5806CB				1N5807CB, 1N5809CB, 1N5811CB				
SYM	Inch	Inch	mm	mm	Inch	Inch	mm	mm	Notes
	Min	Max	Min	Max	Min	Max	Min	Max	
BD	.065	.085	1.65	2.16	.115	.142	2.92	3.61	2
BL	.125	.250	3.18	6.35	.130	.300	3.30	7.62	3
LD	.027	.032	0.69	0.81	.037	.042	0.94	1.07	3, 4
LL	.700	1.30	17.78	33.02	.900	1.30	22.86	33.02	3

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimension BD shall be measured at the largest diameter. The shape of the body, within the bounds of the dimensions is optional.
3. Dimension BL shall include the entire body, slugs, and sections of the lead (dimensions LD and LL) at the lead-to-slug interface over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
4. Dimensions are pre-solder dip.
5. The package style for types 1N5802CB, 1N5804CB, and 1N5806CB is a modified DO-204AH package (similar to a DO-35). The package style for types 1N5807CB, 1N5809CB, and 1N5811CB is a modified DO-204AB package (similar to a DO-14).

FIGURE 1. Physical dimensions of axial leaded package.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

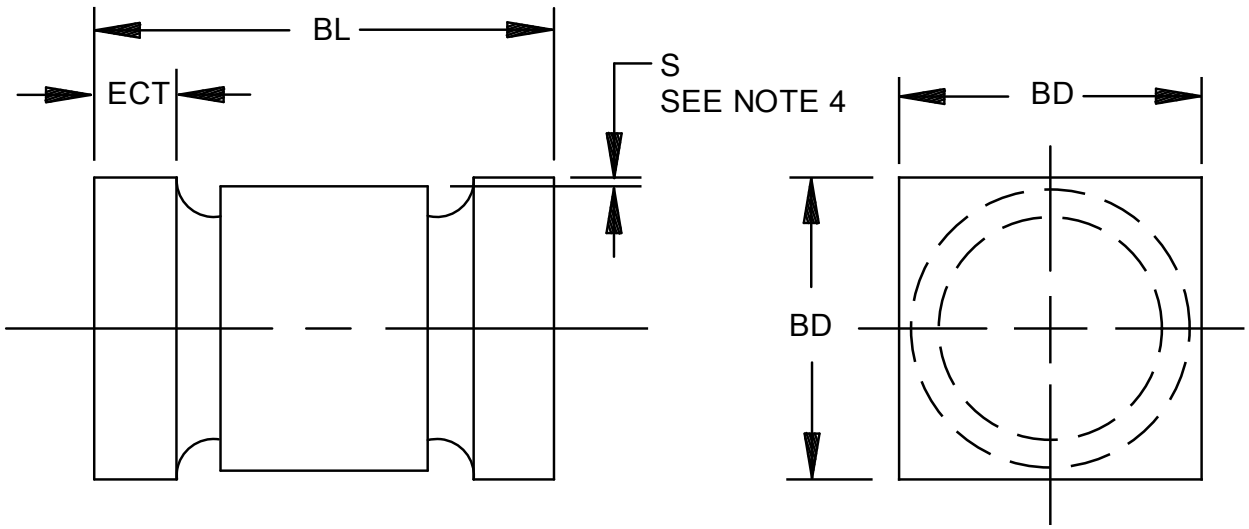

	Dimensions								
	D-5A 1N5802CBUS, 1N5804CBUS, 1N5806CBUS				D-5B 1N5807CBUS, 1N5809CBUS, 1N5811CBUS				
SYM	Inch Min	Inch Max	mm Min	mm Max	Inch Min	Inch Max	mm Min	mm Max	Notes
BD	.091	.103	2.31	2.62	.137	.148	3.48	3.76	
BL	.168	.200	4.27	5.08	.200	.225	5.08	5.72	
ECT	.019	.028	0.48	0.71	.019	.028	0.48	0.71	
S	.003		0.08		.003		0.08		

NOTES:
1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Minimum clearance of glass body to mounting surface on all orientations.
4. Cathode marking to be either in color band, three dots spaced equally, or a color dot on the face of the end tab.
5. Color dots will be .020 inch (0.51 mm) diameter minimum and those on the face of the end tab shall not lie within .020 inch (0.51 mm) of the mounting surface.

FIGURE 2. Physical dimensions of surface mount US package (square end-caps).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of these documents are available online at https://quicksearch.dla.mil.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 General. The individual item requirements shall be as specified in MIL-PRF-19500 and as modified herein.

3.2 Qualification. Devices furnished under this specification shall be products that are manufactured by a manufacturer authorized by the qualifying activity for listing on the applicable qualified manufacturer's list (QML) before contract award (see 4.2 and 6.3).

3.3 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500 and as follows:

$I_{(BR)}$	Current for testing breakdown voltage.
P_{RM}	Peak reverse power.
V_{fr}	Forward recovery voltage.

3.4 Interface and physical dimensions. The interface and physical dimensions shall be as specified in MIL-PRF-19500, and figures 1 and 2 herein.

3.4.1 Diode construction. These devices shall be metallurgically bonded, thermally matched, non-cavity, double plug construction, utilizing a category III bond in accordance with MIL-PRF-19500. Full area metallurgical bond shall be required (i.e. slug tungsten or moly to die). Point contacts shall not be acceptable. Silver button Dumet design shall not be acceptable. US version devices shall be structurally identical to the non-surface mount devices except for lead terminations.

3.4.2 Lead finish. Unless otherwise specified, terminal finish shall be solderable in accordance with MIL-PRF-19500, MIL-STD-750, and herein. When solder alloy is used for finish, the maximum lead temperature is limited to 175°C maximum. Where a choice of finish is desired, it shall be specified in the acquisition document (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

3.5 Marking. Devices shall be marked as specified in MIL-PRF-19500.

3.5.1 Marking of US version. For US version only, all marking may be omitted from the device except for the cathode marking. All marking which is omitted from the body of the device shall appear on the label of the initial container.

3.5.2 Polarity. The polarity shall be indicated with a contrasting color band to denote the cathode end. Alternately, for surface mount (US) devices, a minimum of three evenly spaced contrasting color dots around the periphery of the cathode end may be used. No color coding will be permitted.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I herein.

3.8 Workmanship. Semiconductor devices shall be processed in such a manner as to be uniform in quality and shall be free from other defects that will affect life, serviceability, or appearance.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3).

c. Conformance inspection (see 4.4) and tables I and II herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.2.1 Group E qualification. Group E inspection shall be performed for qualification or re-qualification only. In case qualification was awarded to a prior revision of the specification sheet that did not request the performance of table II tests, the tests specified in table II herein that were not performed in the prior revision shall be performed on the first inspection lot to this revision to maintain qualification.

4.3 Screening (quality levels JANTXV and JANTX only). Screening shall be in accordance with table E-IV of MIL-PRF-19500, and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen	Measurements for quality levels JANTXV and JANTX level
3c (1)	Thermal impedance (see 4.3.1)
9	Not required
10	Method 1038 of MIL-STD-750, condition A
11	Required; I_{R1} and V_{FM1}
12	Required, see 4.3.2
13 (2)	Subgroup 2 of table I herein; $\Delta I_{R1} \leq \pm 100$ percent of initial reading or ±250 nA dc (1N5802, 1N5804, and 1N5806) or ±1 µA dc (1N5807, 1N5809, and 1N5811), whichever is greater. $\Delta V_{FM1} \leq \pm 0.05$ V dc. Scope-display evaluation (see 4.5.2).

(1) Shall be performed anytime after temperature cycling, screen 3a; and does not need to be repeated in screening requirements.
(2) $Z_{\theta JX}$ is not required in screen 13, if already previously performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

4.3.1 Thermal impedance. The thermal impedance measurements shall be performed in accordance with method 3101 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, t_H, t_{MD}, and K factor where appropriate. The limits will be statistically derived. See table E-IX, subgroup 4 of MIL-PRF-19500 and table II, subgroup 4 herein. See figures 3, 4, 5, and 6 for thermal impedance.

4.3.2 Free air power burn-in conditions. The power burn-in conditions shall be in accordance with method 1038 of MIL-STD-750, condition B. The details of 4.5.3 and those that follows shall apply:

a. Adjust T_A, I_O, or I_F to achieve T_J = 135°C minimum, 175°C maximum.

b. ACOL: V_R = rated V_{RWM}; f = 50 to 60 Hz; I_O (min) = col. 4 of 1.3.2.

c. DC: I_F (min) = col. 4 of 1.3.2.

With approval of the qualifying activity and preparing activity, alternate burn-in criteria (hours, bias conditions, T_J, mounting conditions) may be used. A justification demonstrating equivalence is required. In addition, the manufacturing site's burn-in data and performance history will be essential criteria for burn-in modification approval.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500 and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with table E-V of MIL-PRF-19500 and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the tests and conditions specified for subgroup testing in table E-VIB (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and herein.

Subgroup	Method	Condition
B3	1027	I_O = I_{O1} rated minimum (see col. 4 of 1.3.2); adjust I_O to achieve T_J = 150°C minimum, apply V_R = rated V_{RWM} (see col. 2 of 1.3.2), f = 50 to 60 Hz (see 4.5.3.1). T_A = 55°C max. For irradiated devices, include t_{rr} as an end-point measurement.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-VII of MIL-PRF-19500 and herein.

Subgroup	Method	Condition
C2	2036	Axial devices − Tension: Condition A, 4 pounds (1.81 kg), t = 15s for 1N5802, 1N5804, 1N5806. Condition A, 12 pounds (5.44 kg) for 1N5807, 1N5809, 1N5811. Fatigue: Condition E, 2 pounds (0.9 kg).
C2	2038	US devices – Tension: Condition B; 4 pounds (1.81 kg), t = 15s for 1N5802US, 1N5804US, 1N5806US. Condition B, 12 pounds (5.44 kg), t = 15s for 1N5807US, 1N5809US, 1N5811US. Lead fatigue is not applicable to US devices.
C5	4081	$R_{\theta JL(maximum)}$ see column 7 of 1.3.2 and 4.3.1 herein; L = .375 inch (9.53 mm). For surface mount devices (US version), $R_{\theta JEC}$ see column 8 of 1.3.2 and 4.3.1 herein.
C6	1027	I_O = I_{O1} rated minimum (see column 4 of 1.3.2); adjust I_O to achieve T_J = 150°C minimum, apply V_R = rated V_{RWM} (see column 2 of 1.3.2), f = 50 to 60 Hz (see 4.5.3.1). T_A = 55°C maximum. For irradiated devices, include t_{rr} as an end-point measurement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

4.4.4 Group E inspection. Group E inspection shall be conducted in accordance with the conditions specified for subgroup testing in table E-IX of MIL-PRF-19500 and as specified herein.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.5.2 Scope display evaluation. Scope display evaluation shall be stable in accordance with condition A of method 4023 of MIL-STD-750. Scope display may be performed on ATE (automatic test equipment) for screening only with the approval of the qualifying activity. Scope display in table I, subgroup 4 shall be performed on a curve tracer. The reverse current (I_{BR}) over the knee shall be 500 µA peak.

4.5.3 Burn-in and life tests. These tests shall be conducted with a half-sine waveform of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall be neither greater than 180 degrees, nor less than 150 degrees.

4.5.3.1 Junction temperature measurements. Use method 3100 of MIL-STD-750 to measure T_J. The use of a current limiting or ballast resistor is permitted provided that each DUT still sees the minimum I_O or I_F and that the minimum applied voltage, where applicable, is maintained through-out the burn-in period.

4.5.3.2 Mounting conditions. At the option of the manufacturer, any clips or heat sink mounting configurations may be utilized provided that I_O is increased such that the junction temperature of each diode is maintained at +135°C minimum for screening, +150°C minimum for life test, and that the minimum required voltage V_{RWM} is maintained throughout the burn-in period.

4.5.4 Thermal resistance. Thermal resistance measurement shall be performed in accordance with method 4081 of MIL-STD-750 using the guidelines in that method for determining I_M, I_H, and t_H. Measurement delay time t_{MD} = 70 µs max. See table E-IX of MIL-PRF-19500, subgroup 4, and figures 3, 4, 5, and 6 herein. Forced moving air or draft shall not be permitted across the device during test.

4.5.5 P_{RM} characterization. The testing to characterize P_{RM} shall be conducted in accordance with method 4065 of MIL-STD-750. The following details shall apply:

a. During the test, the voltage (V_{BR}) shall be monitored to verify it has not collapsed.

b. Any collapse in V_{BR} during or after the test, or rise in leakage current (I_R) after the test that exceeds I_{R1} in table I, shall be considered a failure to that level of applied P_{RM}.

c. Progressively higher levels of P_{RM} shall be applied until failure occurs on all devices within the chosen sample size to characterize each sublot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance 2/	3101	See 4.3.1	$Z_{\theta JX}$			°C/W
Forward voltage	4011	Condition B; duty cycle ≤ 2 percent (pulsed see 4.5.1); t_p = 8.3 ms (max)				
1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS		I_{FM} = 1.0 A	V_{FM1}		0.875	V
1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS		I_{FM} = 2.5 A	V_{FM2}		0.975	V
Forward voltage	4011	Condition B; duty cycle ≤ 2 percent (pulsed see 4.5.1); t_p = 8.3 ms (max)				
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		I_{FM} = 3.0 A	V_{FM3}		0.865	V
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		I_{FM} = 4.0 A	V_{FM4}		0.875	V
1N5807CB, CBUS 1N5809CB, CBUS 1N5811CB, CBUS		I_{FM} = 6.0 A	V_{FM5}		0.925	V
Reverse current	4016	Condition A or B	I_{R1}			
1N5802CB, CBUS		V_R = 50 V			1.0	µA
1N5804CB, CBUS		V_R = 100 V			1.0	µA
1N5806CB, CBUS		V_R = 150 V			1.0	µA
1N5807CB, CBUS		V_R = 50 V			5.0	µA
1N5809CB, CBUS		V_R = 100 V			5.0	µA
1N5811CB, CBUS		V_R = 150 V			5.0	µA
Breakdown voltage	4021	$I_{(BR)}$ = 100 µA	$V_{(BR)1}$			
1N5802CB, CBUS,				60		V
1N5807CB, CBUS				60		V
1N5804CB, CBUS,				110		V
1N5809CB, CBUS				110		V
1N5806CB, CBUS,				160		V
1N5811CB, CBUS				160		V

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation:		T_A = +125°C minimum.				
Reverse current	4016	Condition A or B	I_{R2}			
1N5802CB, CBUS		V_R = 50 V			175	µA
1N5804CB, CBUS		V_R = 100 V			175	µA
1N5806CB, CBUS		V_R = 150 V			175	µA
1N5807CB, CBUS		V_R = 50 V			525	µA
1N5809CB, CBUS		V_R = 100 V			525	µA
1N5811CB, CBUS		V_R = 150 V			525	µA
Forward voltage	4011	Condition B; duty cycle ≤ 2 percent (pulsed see 4.5.1); t_p = 8.3 ms (max)				
1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS		I_{FM} = 1.0 A	V_{FM6}		0.800	V
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		I_{FM} = 4.0 A	V_{FM7}		0.800	V
Low-temperature operation:		T_A = −65°C minimum.				
Forward voltage	4011	Condition B; duty cycle ≤ 2 percent (pulsed see 4.5.1); tp = 8.3 ms (max)				
1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS		I_{FM} = 1.0 A	V_{FM8}		1.075	V
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		I_{FM} = 4.0 A	V_{FM9}		1.075	V
Breakdown voltage	4021	$I_{(BR)}$ = 100 µA	$V_{(BR)2}$			
1N5802CB, CBUS, 1N5807CB, CBUS				50		V
1N5804CB, CBUS, 1N5809CB, CBUS				100		V
1N5806CB, CBUS, 1N5811CB, CBUS				150		V

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Reverse recovery time 1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS	4031	Condition B $I_F = I_{RM} = 0.5$ A $I_{R\ (REC)} = 0.05$ A(pk) di/dt = 65 A/µs (min)	t_{rr}		25	ns
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		$I_F = I_{RM} = 1.0$ A $I_{R(REC)} = 0.1$ A(pk) di/dt = 100 A/µs (min)			30	ns
Capacitance 1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS	4001	$V_R = 10$ V; f = 1 MHz; $V_{sig} = 50$ mV (p-p)	C_J		25	pF
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS					60	pF
Forward recovery voltage 1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS	4026	$t_r = 8$ ns $I_F = 250$ mA	$V_{(peak)}$		2.2	V (pk)
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		$I_F = 500$ mA			2.2	V (pk)
Forward recovery time 1N5802CB, CBUS, 1N5804CB, CBUS, 1N5806CB, CBUS	4026	$t_p \geq 20$ ns, $t_r = 8$ ns, the test is measured at $V_{FR} = 1.1 \times V_F$ $I_{FM} = 250$ mA	t_{fr}		15	ns
1N5807CB, CBUS, 1N5809CB, CBUS, 1N5811CB, CBUS		$I_{FM} = 500$ mA			15	ns
Scope display evaluation	4023	Condition A, see 4.5.2, n = 116, c = 0				

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limit	Limit	Unit
	Method	Conditions		Min	Max	
Subgroup 5						
Not applicable						
Subgroup 6						
Forward surge	4066	Condition A, ten surges of 8.3 ms each at 1 minute intervals superimposed on $I_O = I_{O1}$ rated (see 1.3.2); V_{RWM} = rated (see 1.3.2); T_A = +25°C.	I_{FSM}		See Col. 5 of 1.3.2	
Electrical measurements		See table I, subgroup 2 except $Z_{\theta JX}$.				
Subgroup 7						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.
2/ For end-point measurements, this test is required for the following subgroups:
Group B, subgroups 2 and 3 (JANTXV).
Group C, subgroup 2 and 6.
Group E, subgroup 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only.


Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1A			45 devices, c = 0
Temperature cycling (air to air)	1051	20 cycles, except high temperature shall be 150°C and low temperature shall be -195°C.	
Hermetic seal	1071		
Electrical measurement		See table I, subgroup 2.	
Subgroup 1B			45 devices, c = 0
Temperature cycling (air to air)	1051	-65°C to +175°C, 500 cycles.	
Hermetic seal	1071		
Electrical measurement		See table I, subgroup 2.	
Subgroup 2			22 devices, c = 0
Steady-state dc blocking life	1048	t = 1,000 hours; T_A = +150°C; V_R dc = 80 to 85 percent rated V_{RWM} (see 1.3.2).	
Electrical measurement		See table I, subgroup 2, except $Z_{\theta JX}$ need not to be performed. For irradiated devices, include t_{rr}, V_F, and I_R as end-point measurements.	
Subgroup 4			Sample size N/A
Thermal impedance curves		See MIL-PRF-19500.	
Subgroups 5 and 6			
Not applicable			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification and requalification only - Continued.

Inspection	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 8			n = 45
Peak reverse power	4065	P_{RM} shall be characterized by the supplier and this data shall be available to the Government. Test shall be performed on each sublot.	
Electrical measurement		See 4.5.5.	
Subgroup 9			n = 45
Resistance to glass cracking	1057	Condition B, step stress to destruction by increasing cycles or up to a maximum of 25 cycles.	
Subgroup 10			n = 22, c = 0
Forward surge	4066	Condition A, I_{FSM} = rated (see 1.3.2); ten surges of 8.3 ms each at 1 minute intervals superimposed on $I_O = I_{O1}$ rated (see 1.3.2); V_{RWM} = rated (see 1.3.2); T_A = + 25°C.	
Electrical measurement		See table I, subgroup 2.	


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

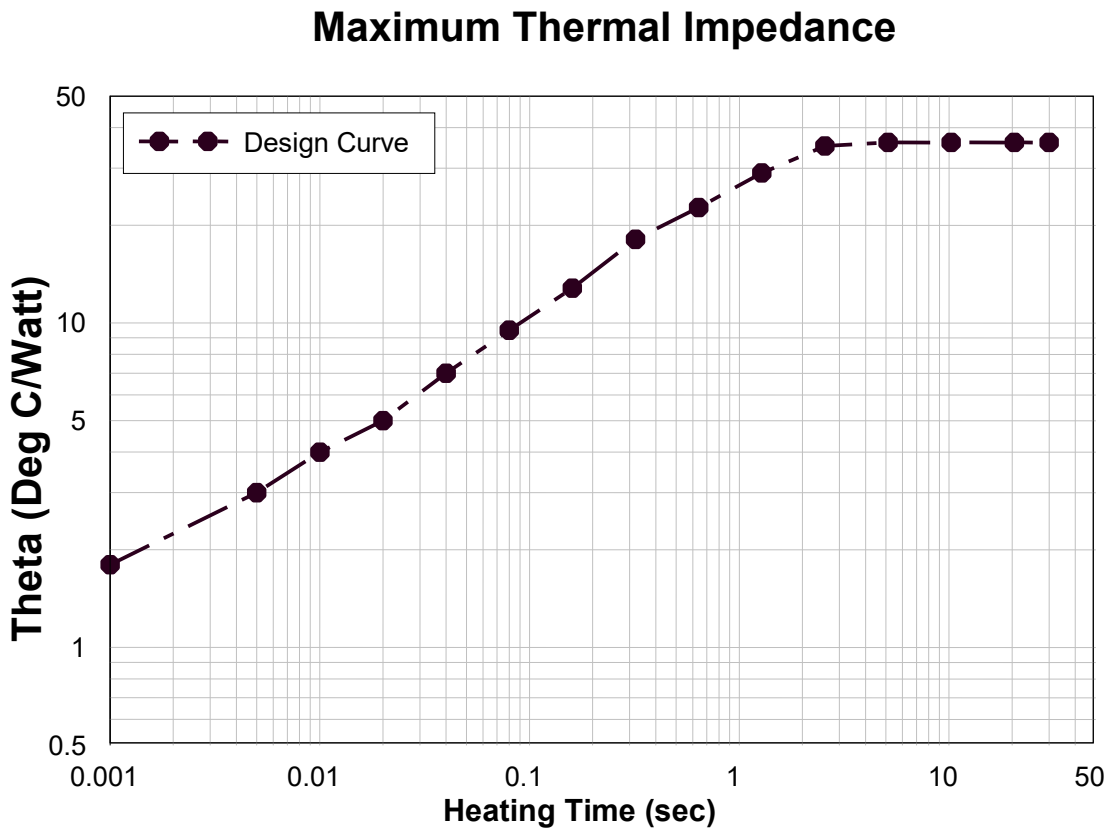

NOTES:
1. Maximum $R_{\theta JL}$ = 36°C/W.
2. $Z_{\theta JX}$ = 4°C/W at 10 ms.

FIGURE 3. Thermal impedance curve for 1N5802CB, 1N5804CB, 1N5806CB.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

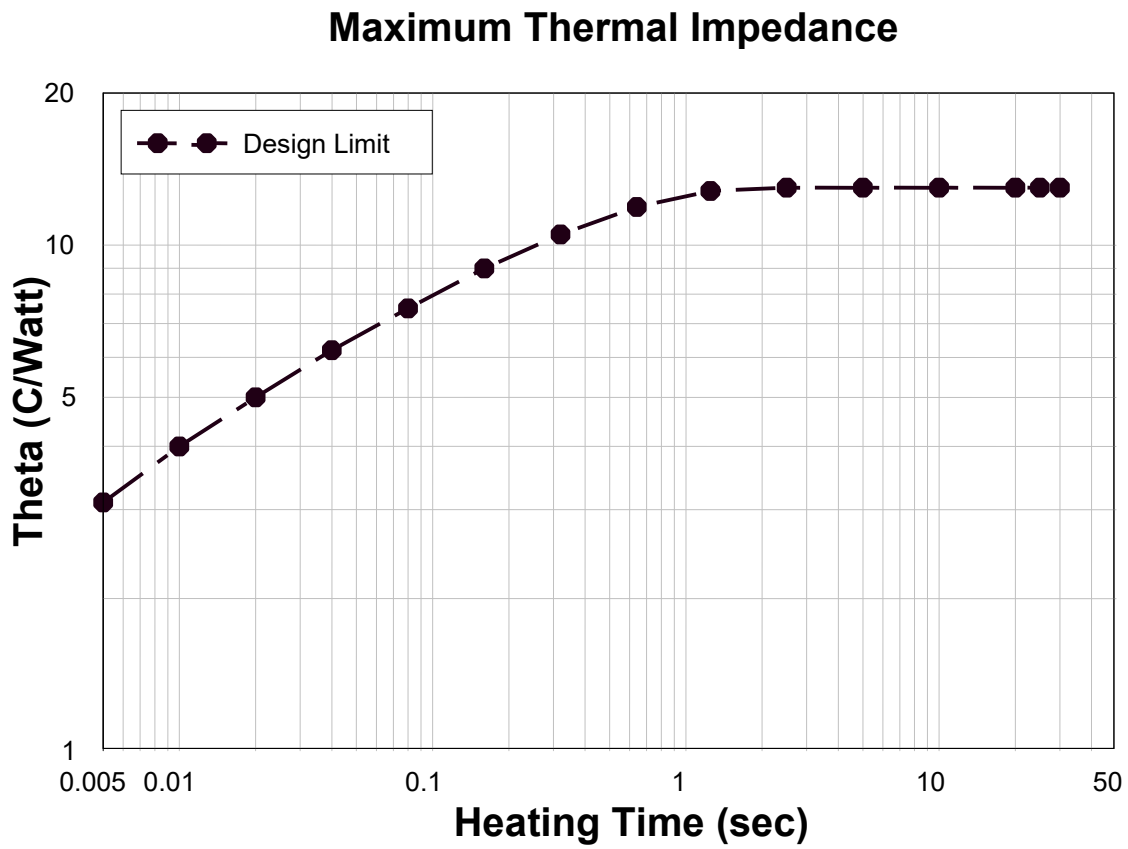

NOTES:
1. Maximum $R_{\theta JEC}$ = 13°C/W.
2. $Z_{\theta JX}$ = 4°C/W at 10 ms.

FIGURE 4. Thermal impedance curve for 1N5802CBUS, 1N5804CBUS, 1N5806CBUS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

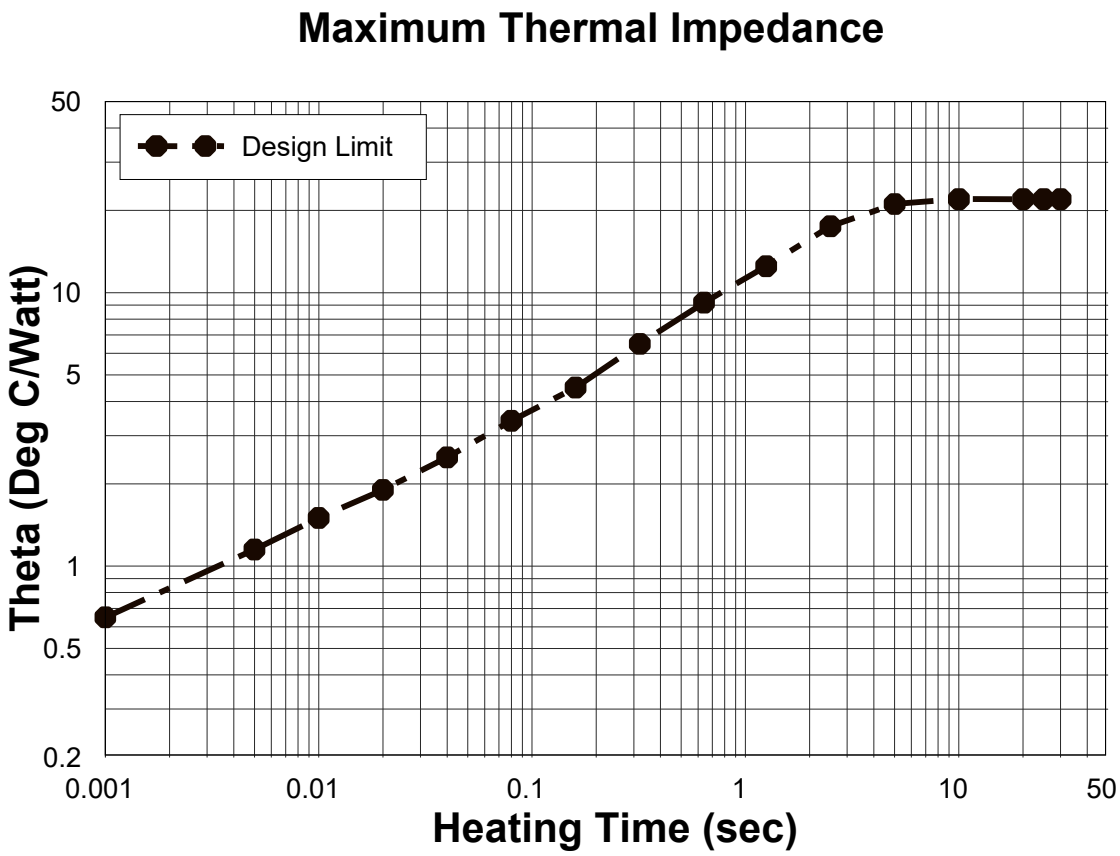

NOTES:
1. Maximum $R_{\theta JL}$ = 22°C/W.
2. $Z_{\theta JX}$ = 1.5°C/W at 10 ms.

FIGURE 5. Thermal impedance curve for 1N5807CB, 1N5809CB, 1N5811CB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

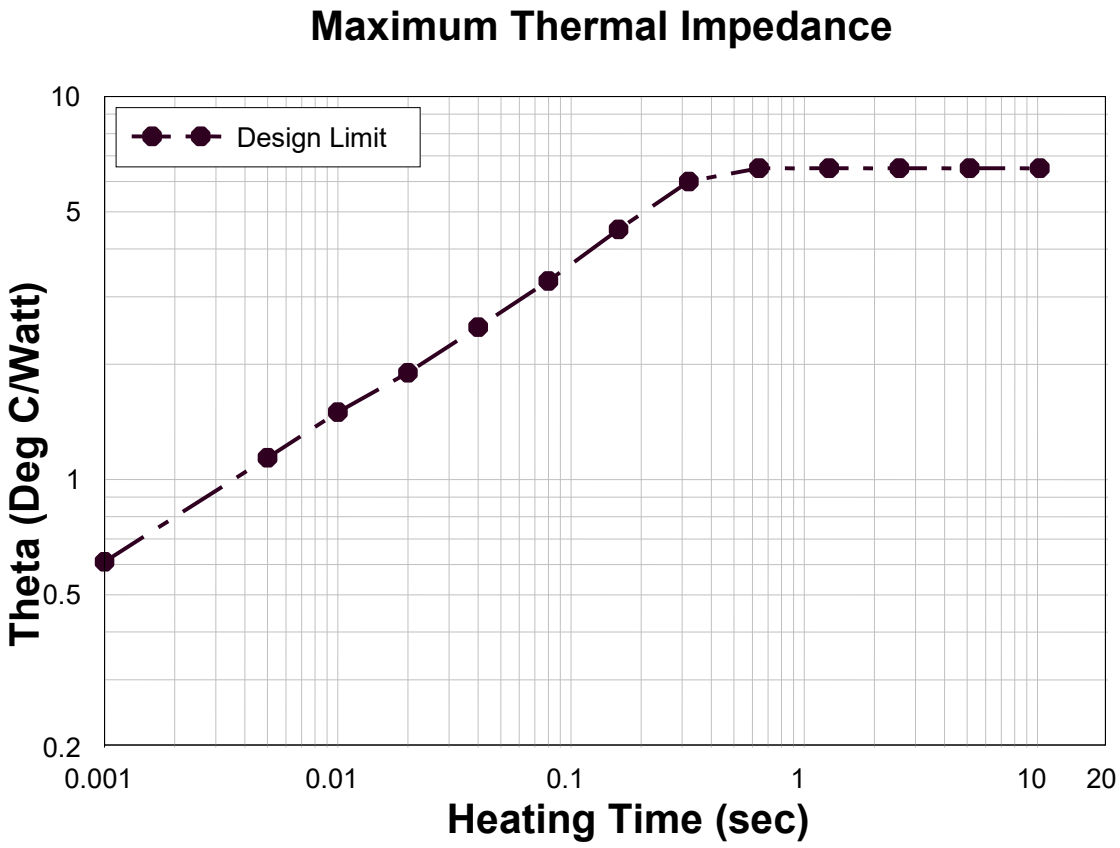

NOTES:
1. Maximum $R_{\theta JEC}$ = 6.5°C/W.
2. $Z_{\theta JX}$ = 1.5°C/W at 10 ms.

FIGURE 6. Thermal impedance curve for 1N5807CBUS, 1N5809CBUS, 1N5811CBUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the Military Service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory. The notes specified in MIL-PRF-19500 are applicable to this specification.)

6.1 Intended use. Semiconductors conforming to this specification are intended for original equipment design applications and logistic support of existing equipment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.


b. Packaging requirements (see 5.1).

c. Lead finish (see 3.4.2).

d. The complete PIN, see 1.5 and 6.4.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List (QML 19500) whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from DLA Land and Maritime, ATTN: VQE, P.O. Box 3990, Columbus, OH 43218-3990 or e-mail vqe.chief@dla.mil . An online listing of products qualified to this specification may be found in the Qualified Products Database (QPD) at https://qpldocs.dla.mil.

6.4 PIN construction example. The PINs are constructed using the following form.

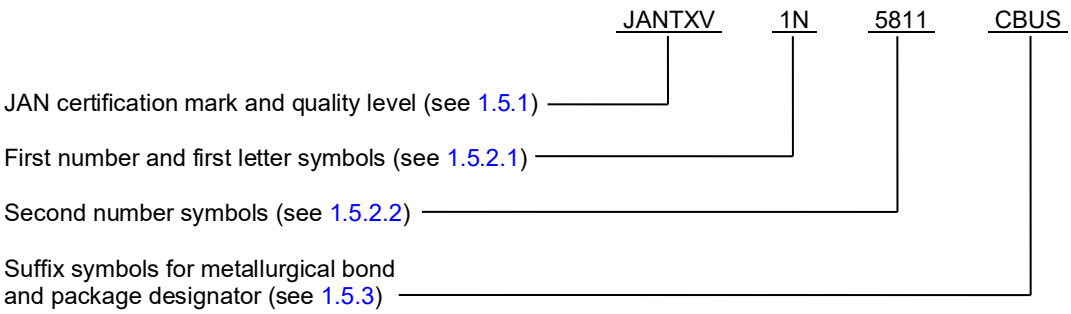

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

6.5 List of PINs. The following is a list of possible PINs available for encapsulated devices covered by this specification sheet.

PINs for axial leaded package

JAN1N5802CB	JANTX1N5802CB	JANTXV1N5802CB
JAN1N5804CB	JANTX1N5804CB	JANTXV1N5804CB
JAN1N5806CB	JANTX1N5806CB	JANTXV1N5806CB
JAN1N5807CB	JANTX1N5807CB	JANTXV1N5807CB
JAN1N5809CB	JANTX1N5809CB	JANTXV1N5809CB
JAN1N5811CB	JANTX1N5811CB	JANTXV1N5811CB

PINs for surface mount US package

JAN1N5802CBUS	JANTX1N5802CBUS	JANTXV1N5802CBUS
JAN1N5804CBUS	JANTX1N5804CBUS	JANTXV1N5804CBUS
JAN1N5806CBUS	JANTX1N5806CBUS	JANTXV1N5806CBUS
JAN1N5807CBUS	JANTX1N5807CBUS	JANTXV1N5807CBUS
JAN1N5809CBUS	JANTX1N5809CBUS	JANTXV1N5809CBUS
JAN1N5811CBUS	JANTX1N5811CBUS	JANTXV1N5811CBUS

6.6 Supersession information. The following types were superseded through a previous revision of this specification. For new design use devices from MIL-PRF-19500/477 as listed below.

Superseding PIN as specified within MIL-PRF-19500/477K, dated 9 July 2012	Superseded PIN that were specified within MIL-PRF-19500/742A, dated 28 August 2009
1N5802	1N5802CB
1N5804	1N5804CB
1N5806	1N5806CB
1N5807	1N5807CB
1N5809	1N5809CB
1N5811	1N5811CB
1N5802US	1N5802CBUS
1N5804US	1N5804CBUS
1N5806US	1N5806CBUS
1N5807US	1N5807CBUS
1N5809US	1N5809CBUS
1N5811US	1N5811CBUS

NOTE: Superseded types should not be used for new design.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

6.7 Applications data.

6.7.1 Half-sine-wave application with 1N5807CB and US to 1N5811CB and US. For a PCB mounting example with FR4 material where the full 3 amp I_O rating (half-sine-wave) is used at a T_J of 175°C and ambient temperature of 55°C, the following steps guide the user in what the PCB pad size will need to be with 1 oz, 2 oz, and 3 oz copper for a 1N5807CB to 1N5811CB or 1N5807CBUS to 1N5811CBUS. For axial-leaded, the lead length for mounting will be .187 inch (4.76 mm) or less from body to entry point on PCB surface. See 6.7.3 for the smaller example devices 1N5802CB to 1N5806CB or 1N5802CBUS to 1N5806CBUS.

a. Use the P_O versus I_O curve on figure 7 to look up 3 amps (X-axis) and follow up to the T_J = 175°C curve (lower) for 2.30 watts.

b. Calculate maximum thermal resistance needed (175°C − 55°C) / 2.30 W = 52°C/W.

c. Look up thermal resistance of 52°C/W on Y-axis using a thermal resistance versus pad area plot on one of the three curves on figure 8 for different weights of copper cladding and then intersect curve horizontally to get answer. These curves assume still air, horizontal position.

d. In this example, the answer is: 1 oz PCB = .5 in^2 (3.23 cm^2), 2 oz PCB = .3 in^2 (1.94 cm^2), 3 oz PCB = .2 in^2 (1.29 cm^2) for each pad.

e. Add a conservative guard-band to the pad size (larger) to keep T_J below 175°C.

6.7.2 Square-wave application with 1N5807CB and US to 1N5811CB and US. For a PCB mounting example with FR4 material to support a 1 amp I_O square wave switching at a 0.50 duty factor (50 percent duty cycle) at T_J = 125°C and ambient temperature of 55°C, the following steps guide the user in what the PCB pad size will need to be with 1 oz,
2 oz, and 3 oz copper.

a. Find size of copper pads on standard FR4 PCB to support operation at 1 amp I_O square wave switching at a 0.50 duty factor (50 percent duty cycle) at T_J = 125°C with T_A = 55°C.

b. Calculate peak I_F = 1 A / 0.50 duty factor = 2 amps.

c. Use the V_F versus I_F curve on figure 9 to look up I_F = 2 A (Y-axis) and follow across to the T_J = 125°C curve (middle) for V_F = 0.65 V.

d. Calculate power = $I_F * V_F *$ duty factor = 2 ∗ 0.65 ∗ 0.50 = 0.65 W.

e. Calculate maximum thermal resistance needed (125°C − 55°C) / 0.65 W = 107°C/W.

f. Look up thermal resistance of 107°C/W on the Y-axis using a thermal resistance versus pad area plot on one of the three curves on figure 8 for different weights of copper cladding and then intersect curve horizontally to get answer. Curves assume still air, horizontal position.

g. In this example, the answer is: 1 oz PCB = .058 in^2 (37.4 mm^2), 2 oz PCB = .038 in^2 (24.5 mm^2), 3 oz PCB = .024 in^2 (15.4 mm^2) for each pad.

h. A conservative pad guard-band is optional since T_J is only 125°C. NOTE: Multilayer PCBs, forced air cooling will improve performance. Closed confinement of the PCB will do the opposite. Use sound thermal management.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

6.7.3 Half-sine-wave application with 1N5802CB and US to 1N5806CB and US. For a PCB mounting example with FR4 material where the full 1 amp I_O rating (half-sine-wave) is used at a T_J of 175°C and ambient temperature of 55°C, the following steps guide the user in what the PCB pad size will need to be with 1 oz, 2 oz, and 3 oz copper for a 1N5802CB to 1N5806CB or 1N5802CBUS to 1N5806CBUS. For axial-leaded, the lead length for mounting will be .187 inch (4.76 mm) or less from body to entry point on PCB surface.

a. Use the P_O versus I_O curve on figure 10 to look up 1 amp (X-axis) and follow up to the T_J = 175°C curve (lower) for 0.78 watts.

b. Calculate maximum thermal resistance needed (175°C − 55°C) / 0.78 W = 154°C/W.

c. Look up thermal resistance of 154°C/W on Y-axis using a thermal resistance versus pad area plot on one of the three curves on figure 11 for different weights of copper cladding and then intersect curve horizontally to get answer. These curves assume still air, horizontal position.

d. In this example, the answer is: 1 oz PCB = .013 in^2 (8.38 mm^2), 2 oz PCB = .008 in^2 (5.16 mm^2), 3 oz PCB = .0053 in^2 (3.42 mm^2) for each pad.

e. Add a conservative guard-band to the pad size (larger) to keep T_J below 175°C.

6.7.4 Square-wave application with 1N5802CBUS to 1N5806CBUS. For a PCB mounting example with FR4 material to support a 0.5 amp I_O square wave switching at a 0.50 duty factor (50 percent duty cycle) at T_J = 125°C and ambient temperature of 55°C, the following steps guide the user in what the PCB pad size will need to be with 1 oz, 2 oz, and 3 oz copper.

a. Find size of copper pads on standard FR4 PCB to support operation at 0.5 amp I_O square wave switching at a 0.50 duty factor (50 percent duty cycle) at T_J = 125°C with T_A = 55°C.

b. Calculate peak I_F = 0.5A / 0.50 duty factor = 1 amp.

c. Use the V_F versus I_F curve on figure 12 to look up I_F = 1 A (Y-axis) and follow across to the T_J = 125°C curve (middle) for V_F = 0.70 V.

d. Calculate power = $I_F * V_F *$ duty factor = 2 * 0.70 * 0.50 = 0.70 W.

e. Calculate maximum thermal resistance needed (125°C − 55°C) / 0.70 W = 100°C/W.

f. Look up thermal resistance of 100°C/W on the Y-axis using a thermal resistance versus pad area plot on one of the three curves on figure 11 for different weights of copper cladding and then intersect curve horizontally to get answer. Curves assume still air, horizontal position.

g. In this example, the answer is: 1 oz PCB = .084 in^2 (54.2 mm^2), 2 oz PCB = .051 in^2 (32.9 mm^2), 3 oz PCB = .034 in^2 (21.9 mm^2) for each pad.

h. A conservative pad guard-band is optional since T_J is only 125°C. NOTE: Multilayer PCBs, forced air cooling, will improve performance. Closed confinement of the PCB will do the opposite. Use sound thermal management.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

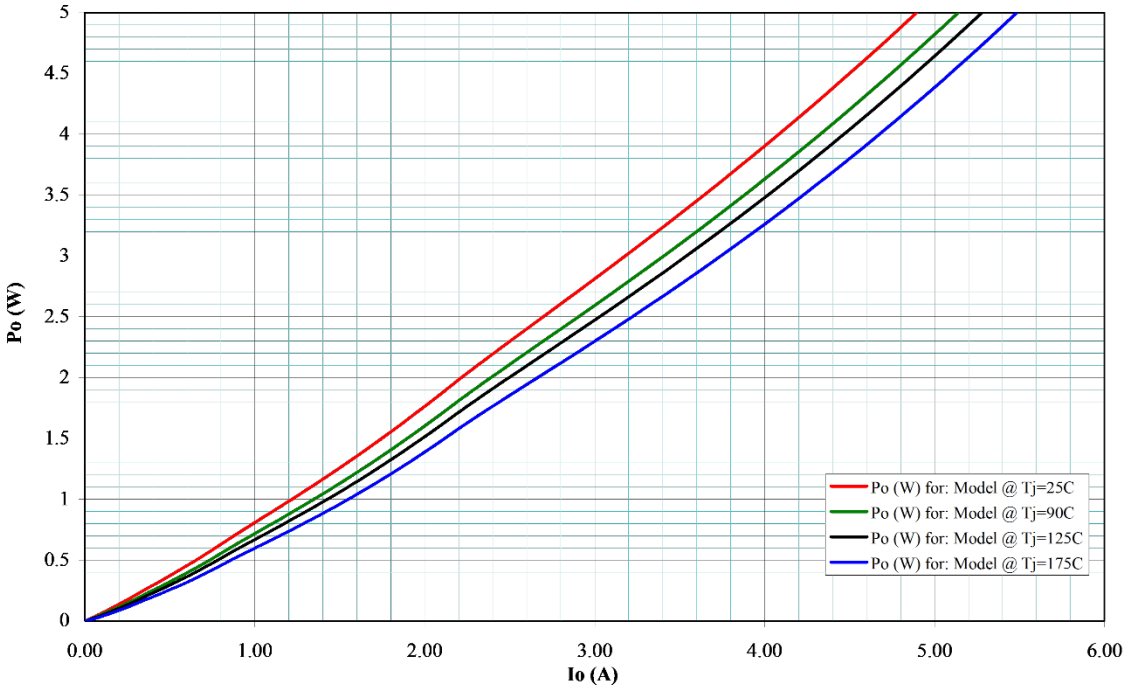


FIGURE 7. Rectifier power P_O versus I_O (average forward current) for 1N5807CB and US to 1N5811CB and US.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

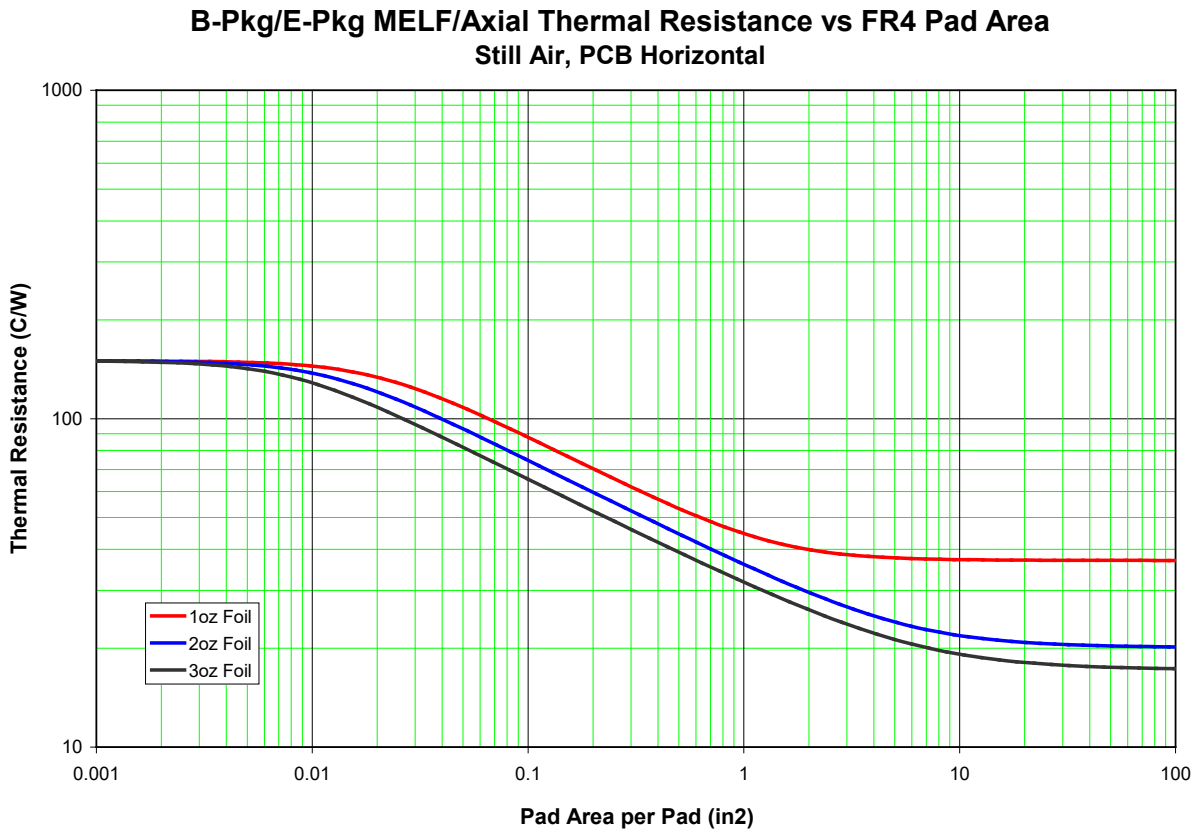


FIGURE 8. Thermal resistance versus pad area (for each pad) for 1N5807CBUS to 1N5811CBUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

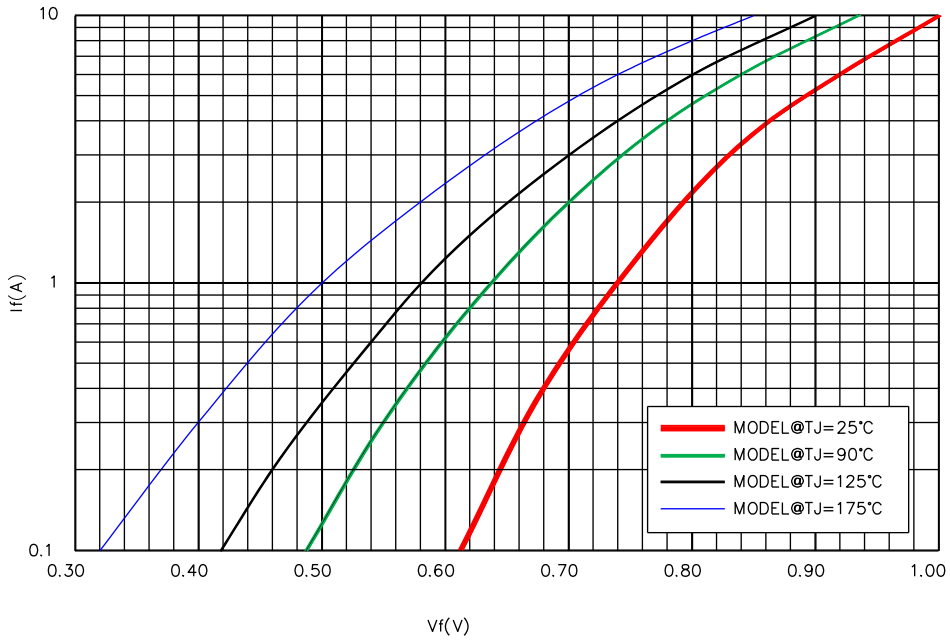


FIGURE 9. Forward voltage versus forward current for 1N5807CBUS to 1N5811CBUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

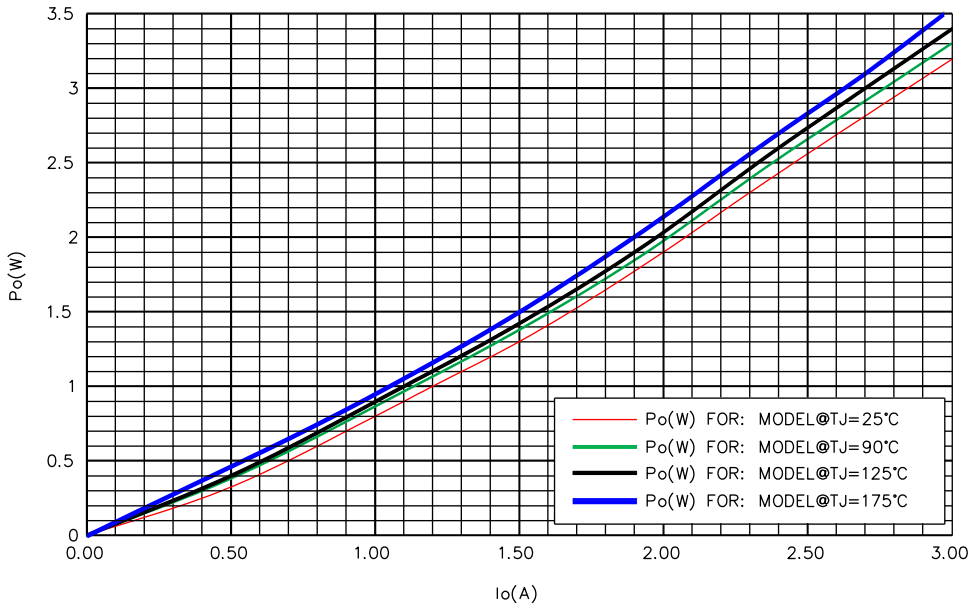


FIGURE 10. Rectifier power P_O versus I_O (average forward current) for 1N5802CB and US to 1N5806CB and US.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

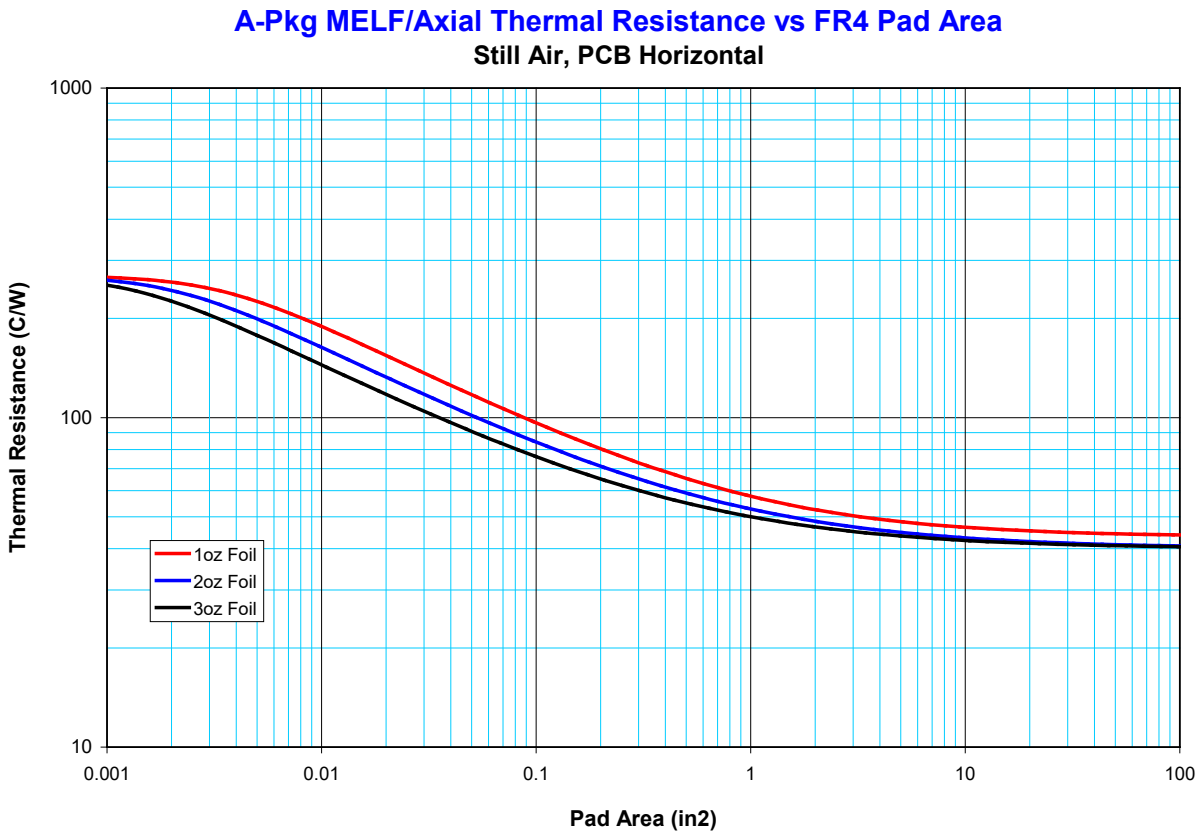


FIGURE 11. Thermal resistance versus pad area (for each pad) for 1N5802CBUS to 1N5806CBUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

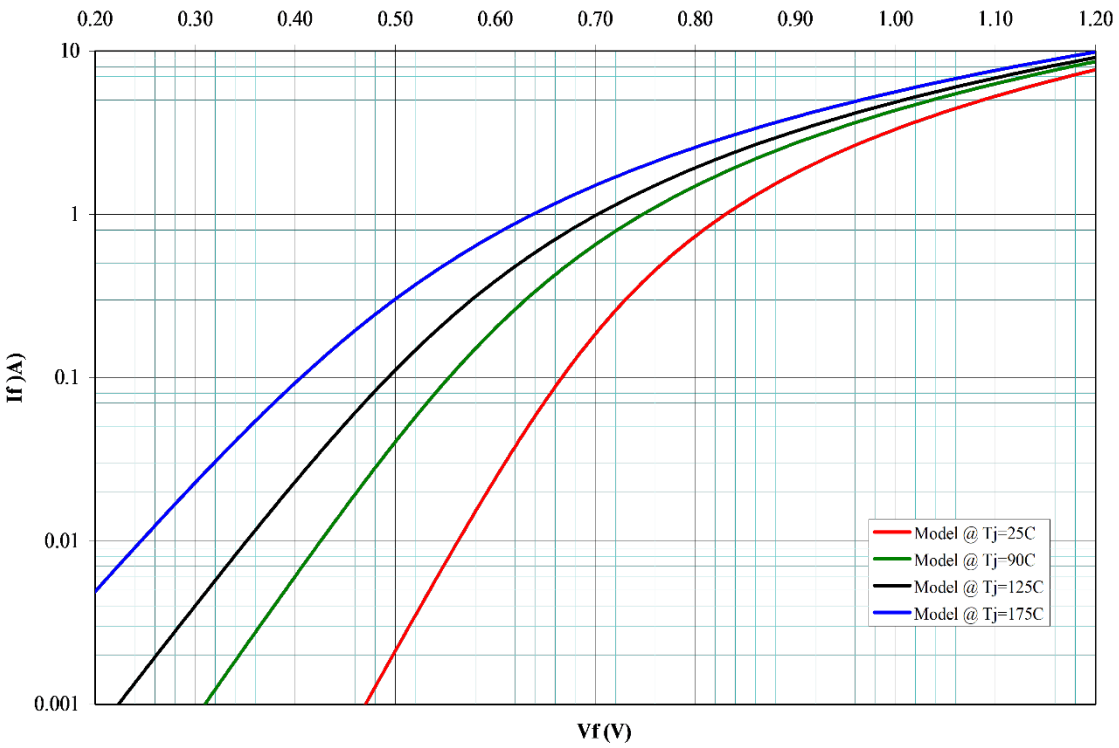


FIGURE 12. Forward voltage versus forward current for 1N5802CBUS to 1N5806CBUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.

6.8 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of marginal notations and relationship to the last previous issue.

Custodians:
Army − CR
Navy − SH
Air Force − 85
NASA − NA
DLA − CC

Review activities:
Army − AR, MI, SM
Navy − AS, MC
Air Force − 19

Preparing activity:
DLA − CC

(Project 5961−2024−063)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T05:24Z
Check the source to verify that this is the current version before use.