A-A-53579
29 July 1988

COMMERCIAL ITEM DESCRIPTION

HANGER, X-RAY FILM

The General Services Administration has authorized the use of this Commercial Item Description in place of Military Specification Mil-H-36203A(DSA-DM) which is cancelled.

This Commercial Item Description covers a clipless hanger having a capacity of 16 films, suitable for use in processing 1-1/4 inch by 1-5/8 inch dental x-ray film.

Salient characteristics:

The x-ray film hanger shall be designed to accommodate 16 standard 1-1/4 inch by 1-5/8 inch dental x-ray films, and shall consist of two film holding sections pivotally mounted in a spot welded frame and handle assembly. The hanger shall be in accordance with Figure 1.

All metal parts of the hanger, including film holding sections, hanger frame, hook, handle, rivets, and latch shall be made entirely of American Iron and Steel Institute (AISI) series 300 corrosion-resisting steel. Hardness shall be a minimum of B75 on the Rockwell scale, except for rivets. The hanger shall be treated to remove contamination and to restore the passivity of the bare material. As an alternate, the hangers may be electropolished. All metal parts shall pass the photographic chemical resistance tests.

Film holding section shall be of strip approximately 3/4 inch wide formed into an elongated "U", with legs approximately 1-5/8 inches long and base approximately 9-1/4 inches. Within the "U" there shall be two additional strips, parallel to the base with the upper one approximately 1-1/8 inches above the base and the other approximately 1/2 inch above the base. These two strips shall each contain 8 holes aligned vertically and shaped to accept and hold the dental x-ray film. The holes shall be generally oval, with approximate dimensions of 1-1/4 inches length by 7/16 inch width at the center. Size and contour of the holes shall be such that a dental film can be inserted easily through the vertically aligned holes in the strips until the end of the film rests on the base of "U" member without scratching or perforating the film.

AMSC N/A FSC 6525

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

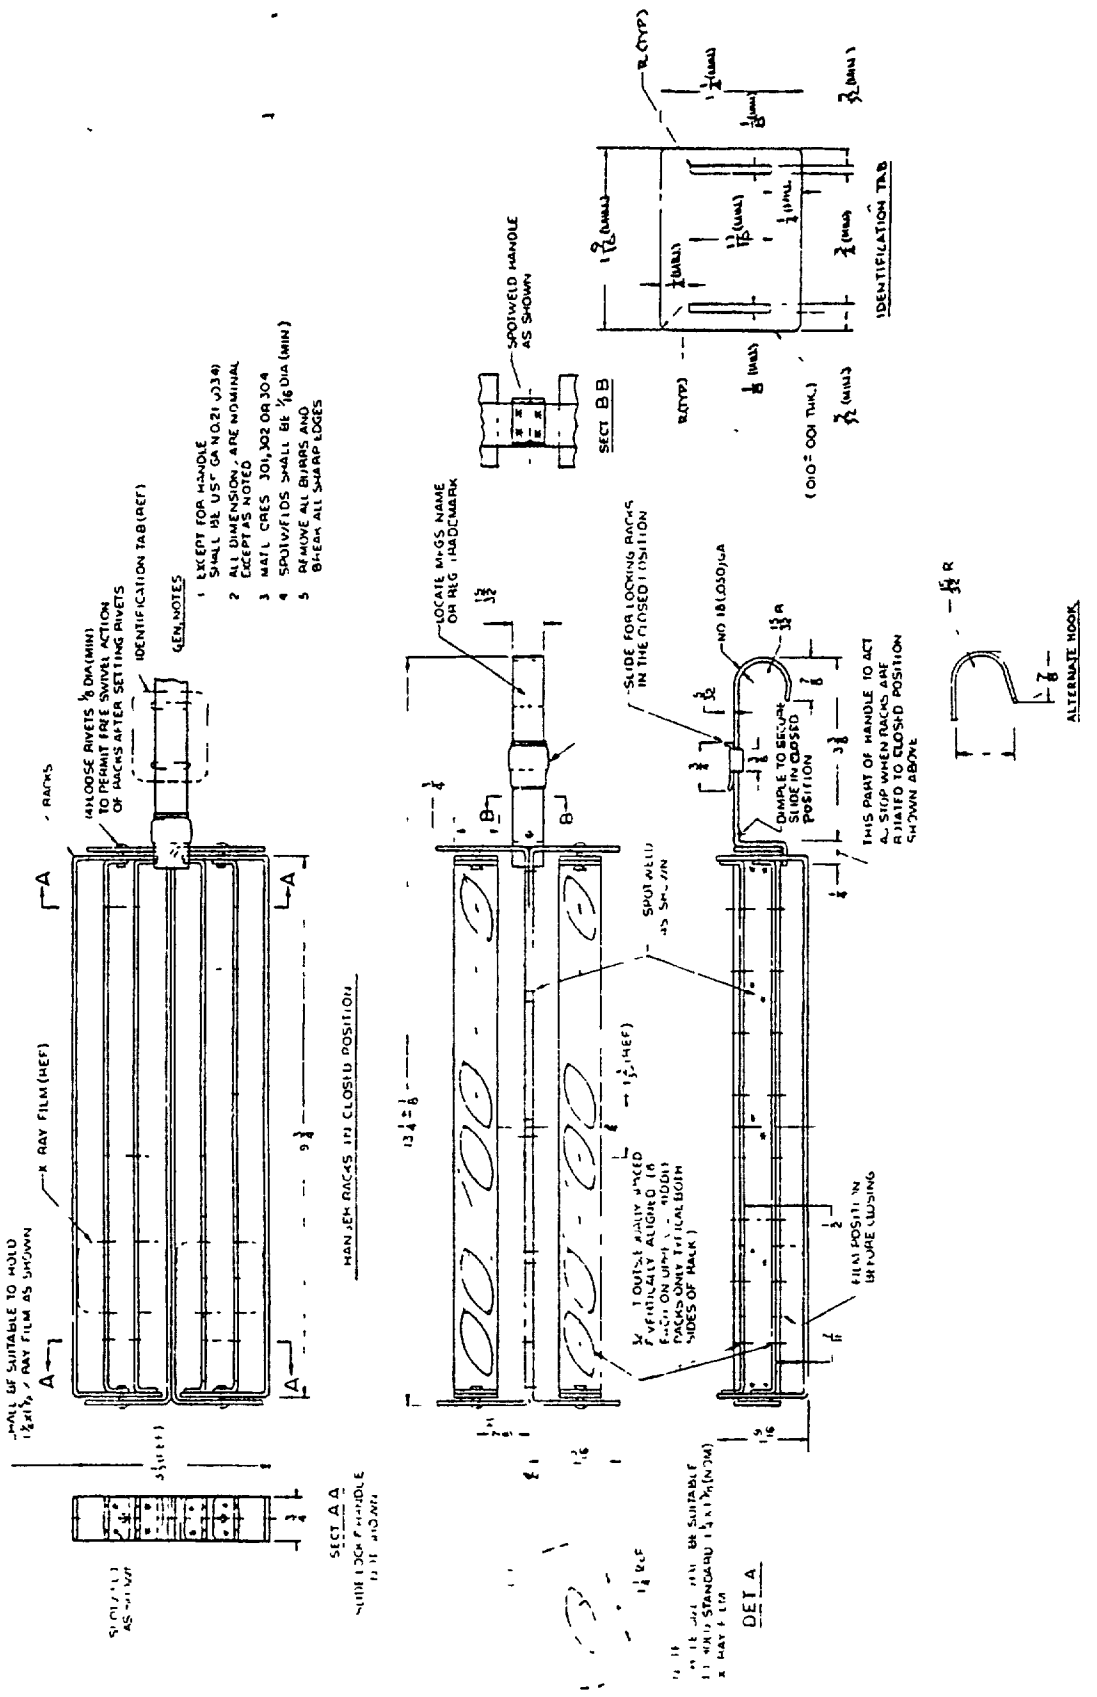


FIGURE 1. X-Ray Film Hanger

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

Two such film holding sections shall be pivotally mounted in the hanger frame so that, when free to rotate with the hanger held horizontally, they hang with the "U" frame upright, and so that the entire hanger will rest on a bench on the bottom of the two film holding sections, providing ready access and steadiness for insertion and removal of the films. The film holding sections shall rotate through approximately 90° to a closed position (against stops provided) with the bases of the "U" frames out and the free end of the mounted film facing the center member of the hanger frames so that the film cannot come out. A suitable latch shall be provided to keep the film holding sections in this closed position.

The over-all size of the hanger (when "closed") shall be approximately 13-1/4 inches long, by 3-1/2 inches wide, by 3/4 inch thick, including a hook of 3/4 inch wide metal formed to act as a handle and a means of supporting the hanger in the x-ray film processing tank. The hook or handle shall be approximately 3-3/8 inches long and securely attached to the center of one end of the frame so that it is free of the bench top when the hanger is resting on the bases of the "U" frames in their "open" position.

Each hanger shall be furnished with three white cellulose acetate or polyvinyl tabs. Each tab shall have two cut-outs to permit mounting on the handle. Each tab shall have a matte finish on at least one of its surfaces to permit pencil marking. One tab shall be mounted on the handle and the other two shall be mounted in two of the vertically aligned oval slots in the film holders.

Component parts in the finished hanger shall be free of cracks and unspecified bends. The oval slots, edges, and corners of the hanger components shall be free of burrs and sharpness. Spot-welded joints shall be secure and free of flash, cracks, or discoloration.

The hanger finish shall be smooth and free of pits or corroded areas. The hangers shall be clean and free of oil, chips, or dirt.

Workmanship. The x-ray film hanger shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One hanger, as specified, constitutes one unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

Quality Assurance Provisions.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 1.5 (percent defective) and an inspection level of II. The unit of product for examination purposes shall be one x-ray film hanger as specified in this description.

Defects.

Hanger not complete with all specified component parts.

The holding sections fail to swivel freely in the open position of the hanger.

Mating parts of the hanger not properly fitted and aligned.

Hanger lock not secure in closed position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

Defects (continued).

Rivets not properly installed.

Oval slots, edges, and corners of the hanger components not free of burns and sharpness.

Spot-welded joints not secure and free of flash, cracks, or discoloration.

Component parts in the finished hanger not free of cracks, and unspecified bends.

Finish not smooth and free of pits or corroded areas.

Hanger not clean and free of oil, chips, or dirt.

Sampling for tests. Sampling for tests (dimensional) shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-2. The unit of product for test purposes shall be one x-ray film hanger.

Tests

Chemical Resistance to Developer.

A standard commercial developer solution shall be prepared according to the manufacturer's recommended procedures. The temperature of the developer solution shall be maintained at 110° ± 5° F. during the tests.

Immerse the hangers to approximately one-half their height in the developing solution for 72 hours; remove, and permit the excess solution to drain off (do not rinse or dry). Load the hangers to capacity with undeveloped film and suspend hangers and film in the developer to such depth that the liquid level is at least 1/4 inch above the top of the film. Cover the container so as to confine vapors and maintain at a temperature of 110° ± 5° F. for 72 hours. After 72 hours, discard the film and rinse, dry, and examine the submerged portion of the hanger for pitting, etching, or evidence of corrosion. A corrosion spot visible to the unaided eye, any pitting, or etching on any significant surface, with the exception of slight corrosion at the spot welds and pivots, shall constitute a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

Chemical Resistance to Fixer.

A standard commercial fixer solution shall be prepared according to the manufacturer's recommended procedures. The temperature of the fixer solution shall be maintained at 110° ± 5° F. during the tests.

Duplicate the two stage test procedure described for the developer solution, using the fixer solution in place of the developer solution with dental films exposed to white light. Any evidence of hanger pitting, etching, or corrosion shall constitute a defect.

Functioning test.

A sample hanger shall be opened, loaded to capacity with standard 1-1/4 inch by 1-5/8 inch dental x-ray films and then closed. To meet the requirements of the test, the hanger shall open easily, individual dental films shall load readily, be retained flat within the aligned oval slots and the hanger shall close easily and lock. In the closed position of the hanger none of the films in the holders shall be bowed along either their length or width. The loaded hanger shall be submersed and agitated in developer solution for a one minute period, after which the latch shall be examined to insure it remained locked. Any failure of the above requirements shall constitute a defect.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

Contractor certification. The contractor shall certify that the product offered meets the salient characteristics of this description and conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered materials. The offeror/contractor is encouraged to use recovered material in accordance with Public Law 94-580, as amended, and as implemented by Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

6525-00-074-4542

Ordering data. Intermediate/exterior package quantities, labeling, and marking must be specified in the contract and/or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

A-A-53579

MILITARY INTERESTS:

Custodians:

Army - MD
Navy - MS
Air Force - 03

PREPARING ACTIVITY:

DoD - MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
PHS
FDA-MPQAS

Project No. 6525-1243

PGC 49413

Location: CID/HANGER/XRAY/H13-32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC-RSTE
2800 South 20th Street
Philadelphia, Pennsylvania 19101-8419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE
A-A-53579	HANGER, X-RAY FILM

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5 PROBLEM AREAS

a. Paragraph Number and Wording:

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a. NAME OF SUBMITTER *(Last First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:21Z
Check the source to verify that this is the current version before use.