
MILITARY SPECIFICATION SHEET

TERMINAL, CASUALTY POWER, BULKHEAD,

200-AMPERE, 500-VOLT, THREE-PHASE, ALTERNATING

CURRENT, SYMBOL NUMBER 1025

The complete requirements for procuring the terminal described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).

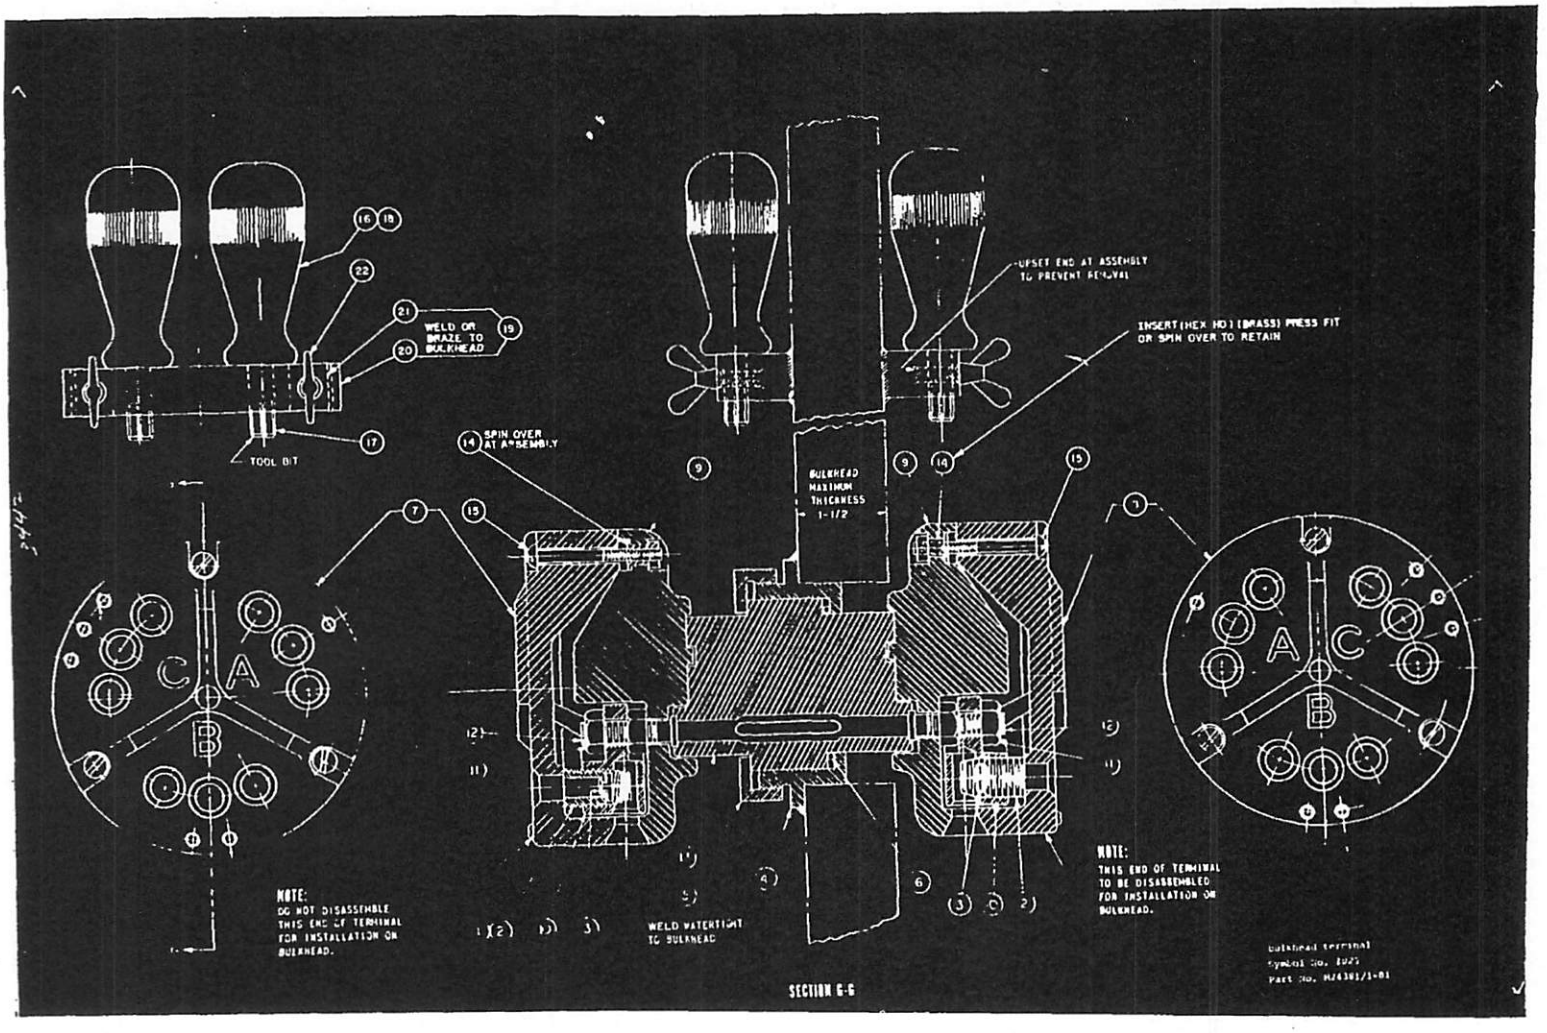

NOTE: Supersedes NAVSHIPS Drawing 9-S-5301-L.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:36Z
Check the source to verify that this is the current version before use.

74%

TOP

MIL-T-24391/1(SH)

NOTE:
PIECE 8 SAME AS PIECE 7 EXCEPT THAT PHASE BUTTONS AND MARKINGS "A" AND "C" ARE INTERCHANGED

MANUFACTURER'S TRADEMARK MOLDED ON COVER 3/8 DIA., 1/64 HIGH

MOLD PART NUMBER

PHASE MARKINGS SHALL BE MOLDED IN 9/18 HIGH LETTERS, RAISED 3/64 WITH LINES 3/32 WIDE. LETTERS AND BUTTONS SHALL BE COATED WITH WHITE ENAMEL.

MOLD SYMBOL NUMBER

SECTION A-A


COVER, PIECES 7 AND 8

HOLDER'S TRADEMARK

CAVITY No.


.406 DIA.
.203 R

Source: http://assist.dla.mil -- Downloaded: 2020-04-19T21:36Z
Check the source to verify that this is the current version before use.

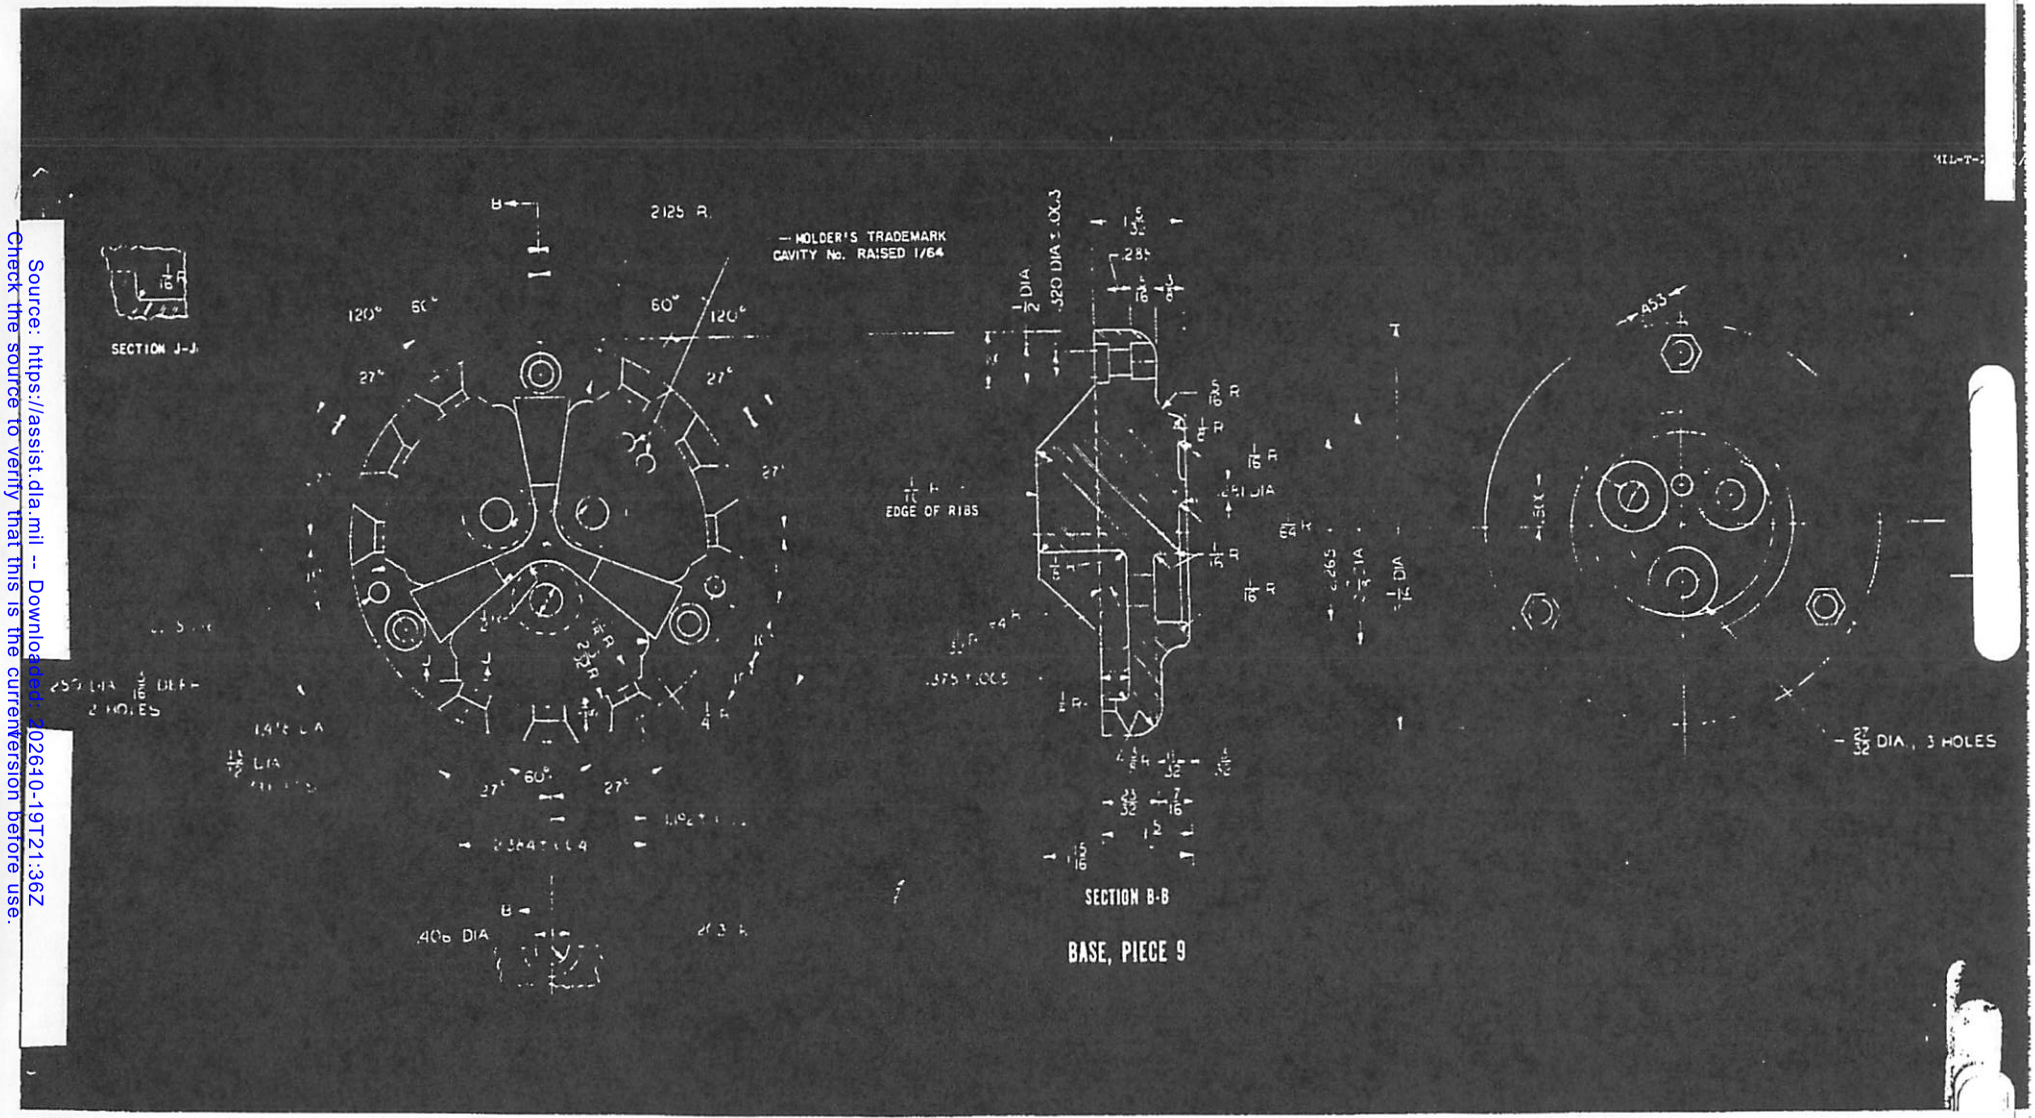


BASE, PIECE 9

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:36Z
Check the source to verify that this is the current version before use.

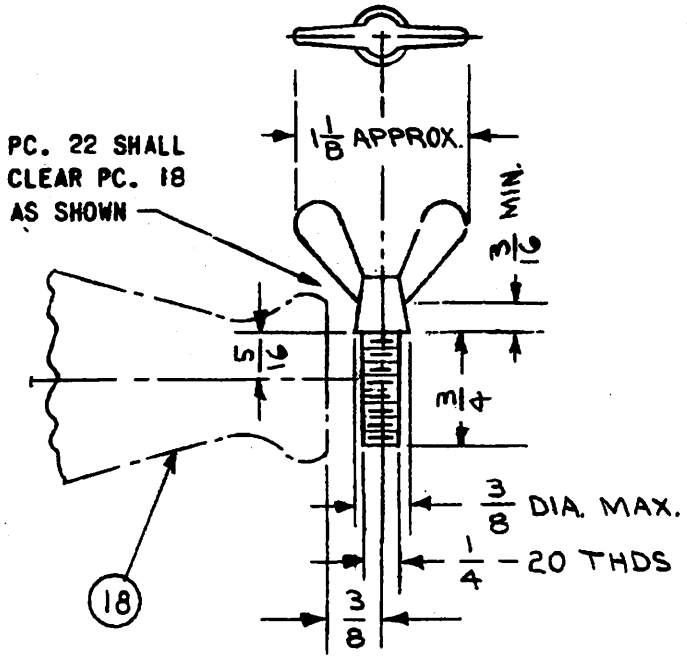


WING SCREW, PIECE 22

SH 10278

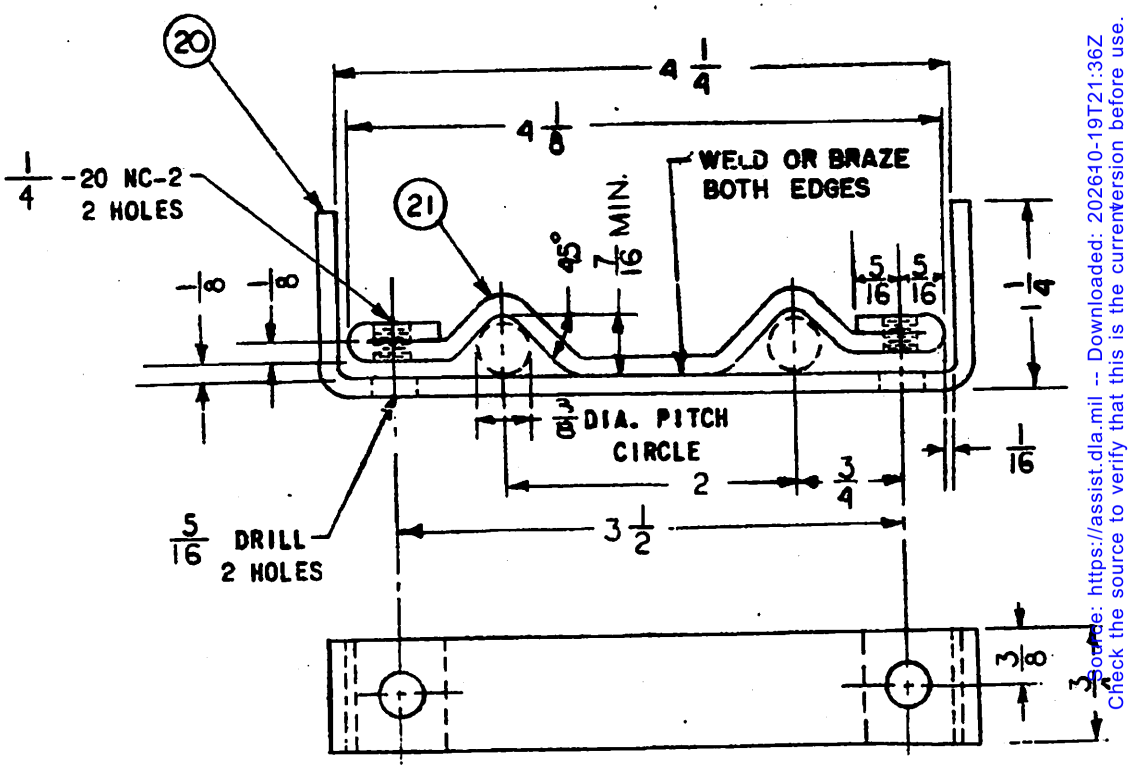


TOOL RACK ASSEMBLY, PIECE 19


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:36Z
Check the source to verify that this is the current version before use.

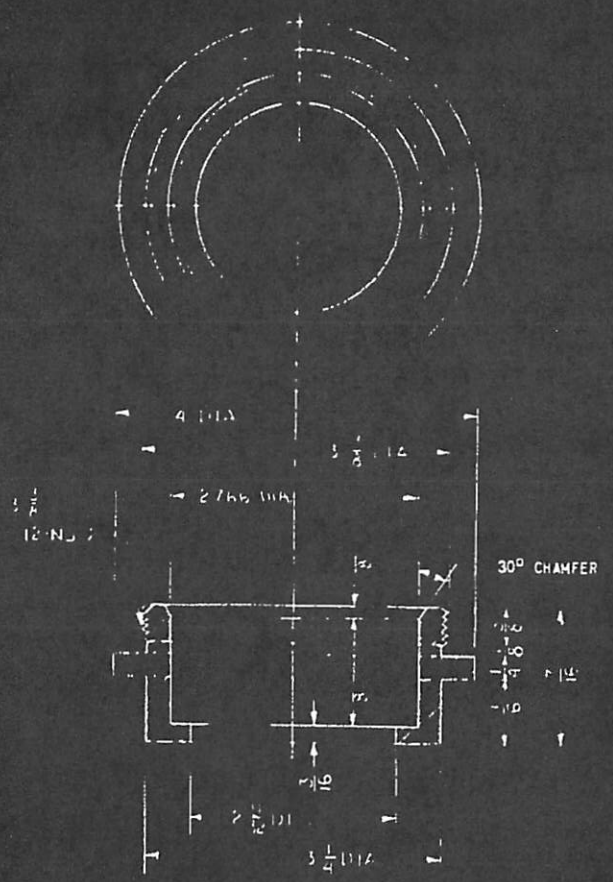

BULKHEAD GLAND, PIECE 4

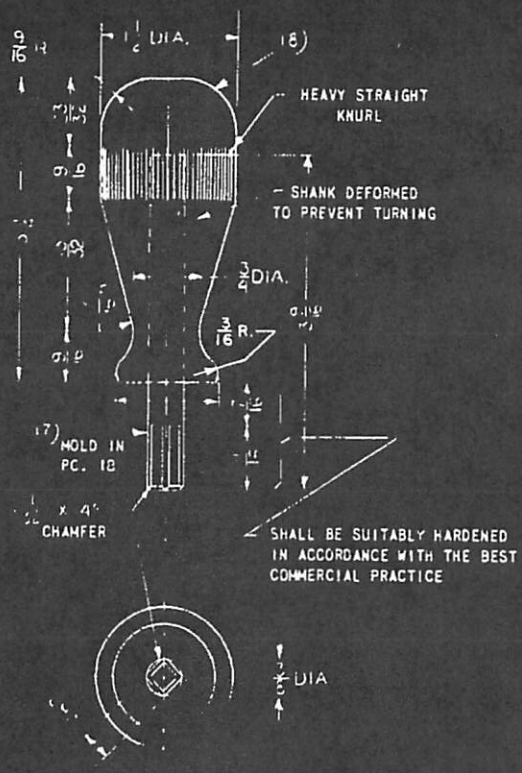


TOOL HANDLE ASSEMBLY, PIECE 16

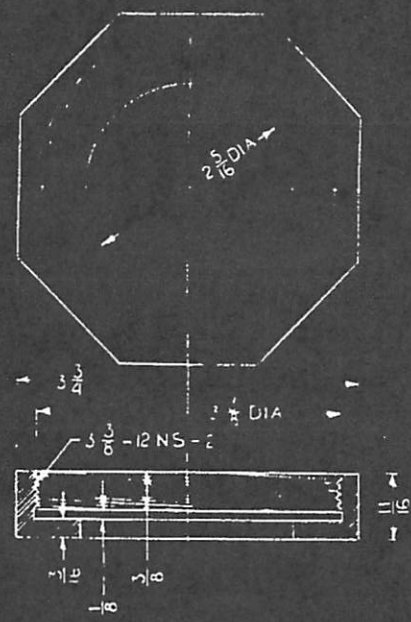

BULKHEAD GLAND NUT, PIECE 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:36Z
Check the source to verify that this is the current version before use.

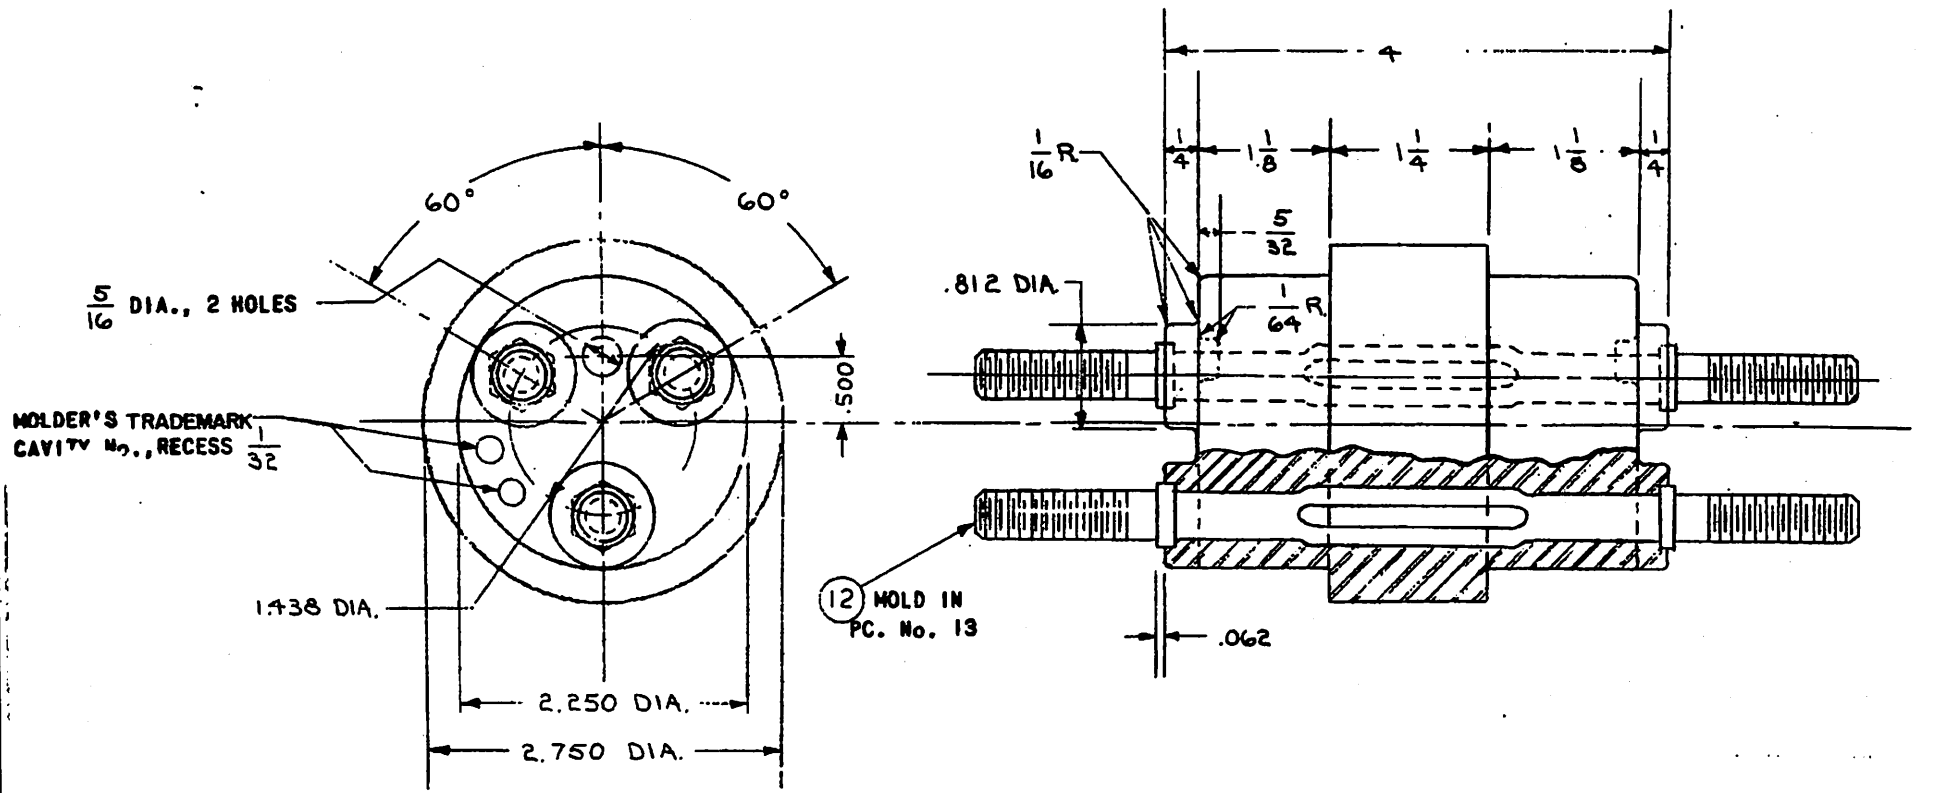


BODY, PIECE 13


SH 10:80

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:36Z
Check the source to verify that this is the current version before use.

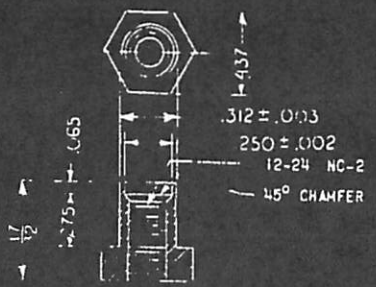

INSERT, PIECE 14

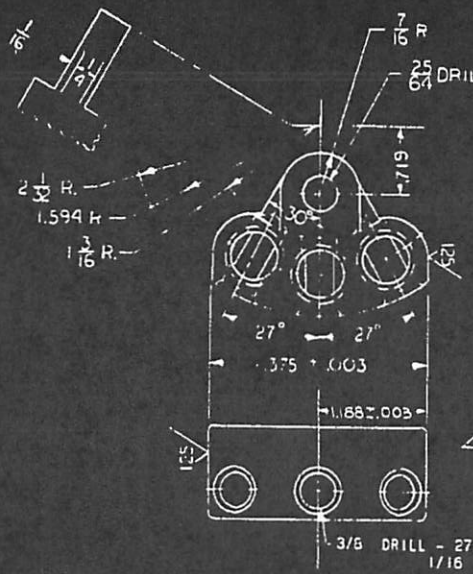


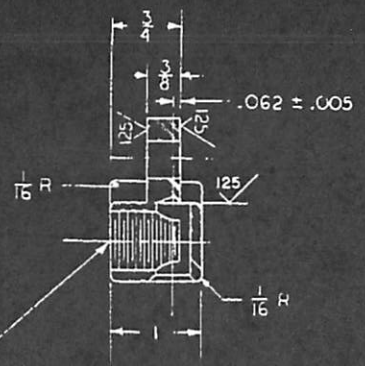


5/8 - 11 NC-2, 3/4 DEEP, FULL THDS.
3 HOLES

3/8 DRILL - 27/32 DEEP, 90° COUNTERSINK - 1/16 DEEP, 3 HOLES


TERMINAL, PIECE 10



TERMINAL NUT, PIECE 11

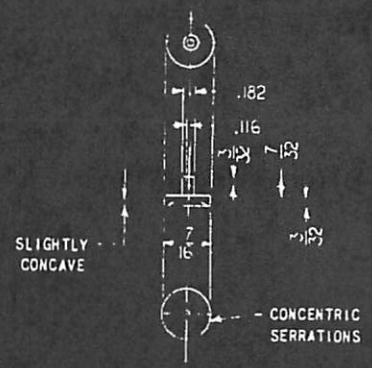


PRESSURE DISK, PIECE 3

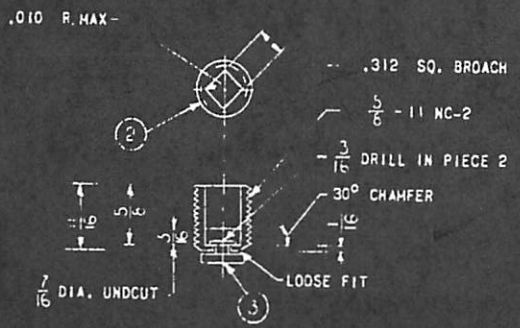


TERMINAL SCREW ASSEMBLY, PIECE 1

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:36Z
Check the source to verify that this is the current version before use.

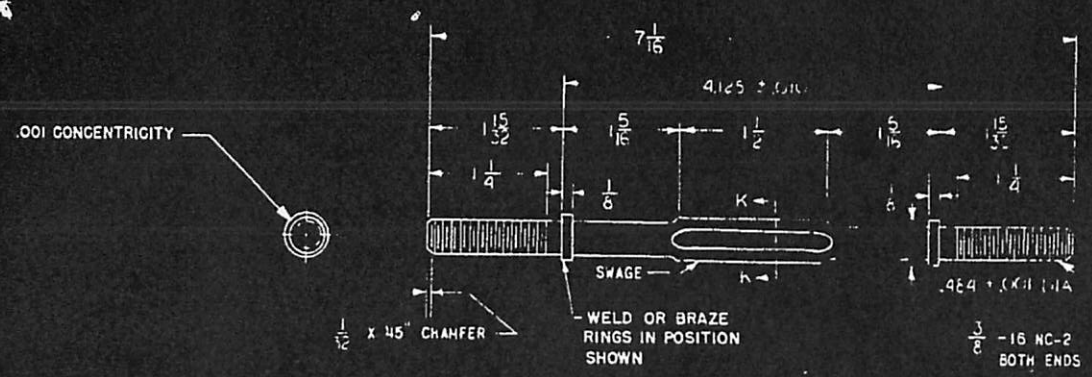

TERMINAL ROD, PIECE 12

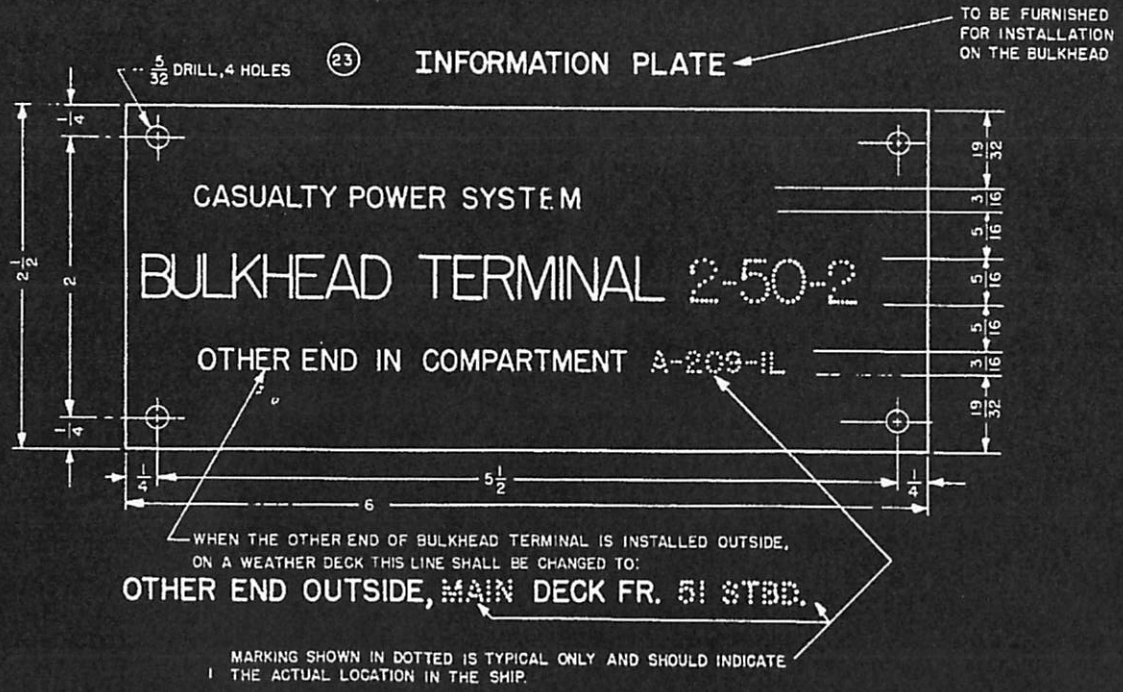

Source: https://assist.dla.mil -- Downloaded: 20240-19T21:36Z
Check the source to verify that this is the current version before use.

List of material

Quantities are for one a.c. bulkhead terminal

Piece number	Name of piece	No. req'd.	Material	Material specifications	Finish	Remarks
1	Terminal screw assembly	18				
2	Terminal screw	18	Brass	Coml		
3	Pressure disk	18	Brass	Coml		
4	Bulkhead gland	1	Steel	Coml	Zinc	
5	Bulkhead gland nut	1	Steel	Coml	Zinc	
6	Bulkhead O-ring	1	Rubber	MIL-G-18586		Size No.33
7	Cover (left hand)	1	Molded plastic type MAI-60	MIL-M-14	Gray	1/
8	Cover (right hand)	1	Molded plastic type MAI-60	MIL-M-14	Gray	1/
9	Base	2	Molded plastic type MAI-60	MIL-M-14	Gray	1/
10	Terminal	6	Cast copper alloy Alloy B2	QQ-C-390		
11	Terminal nut special	12	Brass	Coml		
12	Terminal rod	3	Copper hard drawn	QQ-B-825		
13	Body	1	Molded plastic type MAI-60	MIL-M-14	Gray	1/
14	Insert	6	Brass	Coml		
15	#12-24 rh.hd.mach.screw 2-1/16"lg.	6	Brass	Coml		
16	Tool handle assembly	4				
17	Tool bit	4	Tool steel	Coml	Zinc	
18	Tool handle	4	Molded plastic type MAI-60	MIL-M-14	Gray	1/
19	Tool rack assembly	2				
20	Tool rack	2	Steel	Coml	Zinc	
21	Tool rack clamp	2	Steel	Coml	Zinc	
22	Wing screw	4	Steel	Coml	Zinc	
23	Information plate	1	Am.phenolic	MIL-P-15037		

1/ Molded plastic type MMI-30 (natural) may be substituted for MAI-60 (gray).

All dimensions in inches
unless otherwise specified

Tolerances are:

Fractions . . . . . ± 1/64
Decimals. . . . . ± .005
Angles. . . . . ± 1/4°degree

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Bulkhead terminal shall be designed for use with type THOP-42 of MIL-C-915/6.
3. Electrical rating: 200 amperes, 500 volts, three-phase, alternating current.
4. All projection and spot welding shall be performed by machines having automatic control of current, timing, and pressure to insure uniformity of operation.
5. Impact test required to determine strength of welded or brazed parts.
6. Water pressure test to determine watertightness of bond between terminal rod and body.
7. Cover for bulkhead terminal is covered by MIL-T-24381/10.
8. Part number: M24381/1-01.

Preparing activity:
Navy SH
(Project 5940-N356)

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:36Z
Check the source to verify that this is the current version before use.