MILITARY SPECIFICATION SHEET


TERMINALS, CASUALTY POWER, RISER,

200-AMPERE, 500-VOLT, THREE-PHASE, ALTERNATING

CURRENT, SYMBOL NUMBERS

1032, 1033, AND 1034

The complete requirements for procuring the terminal described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).

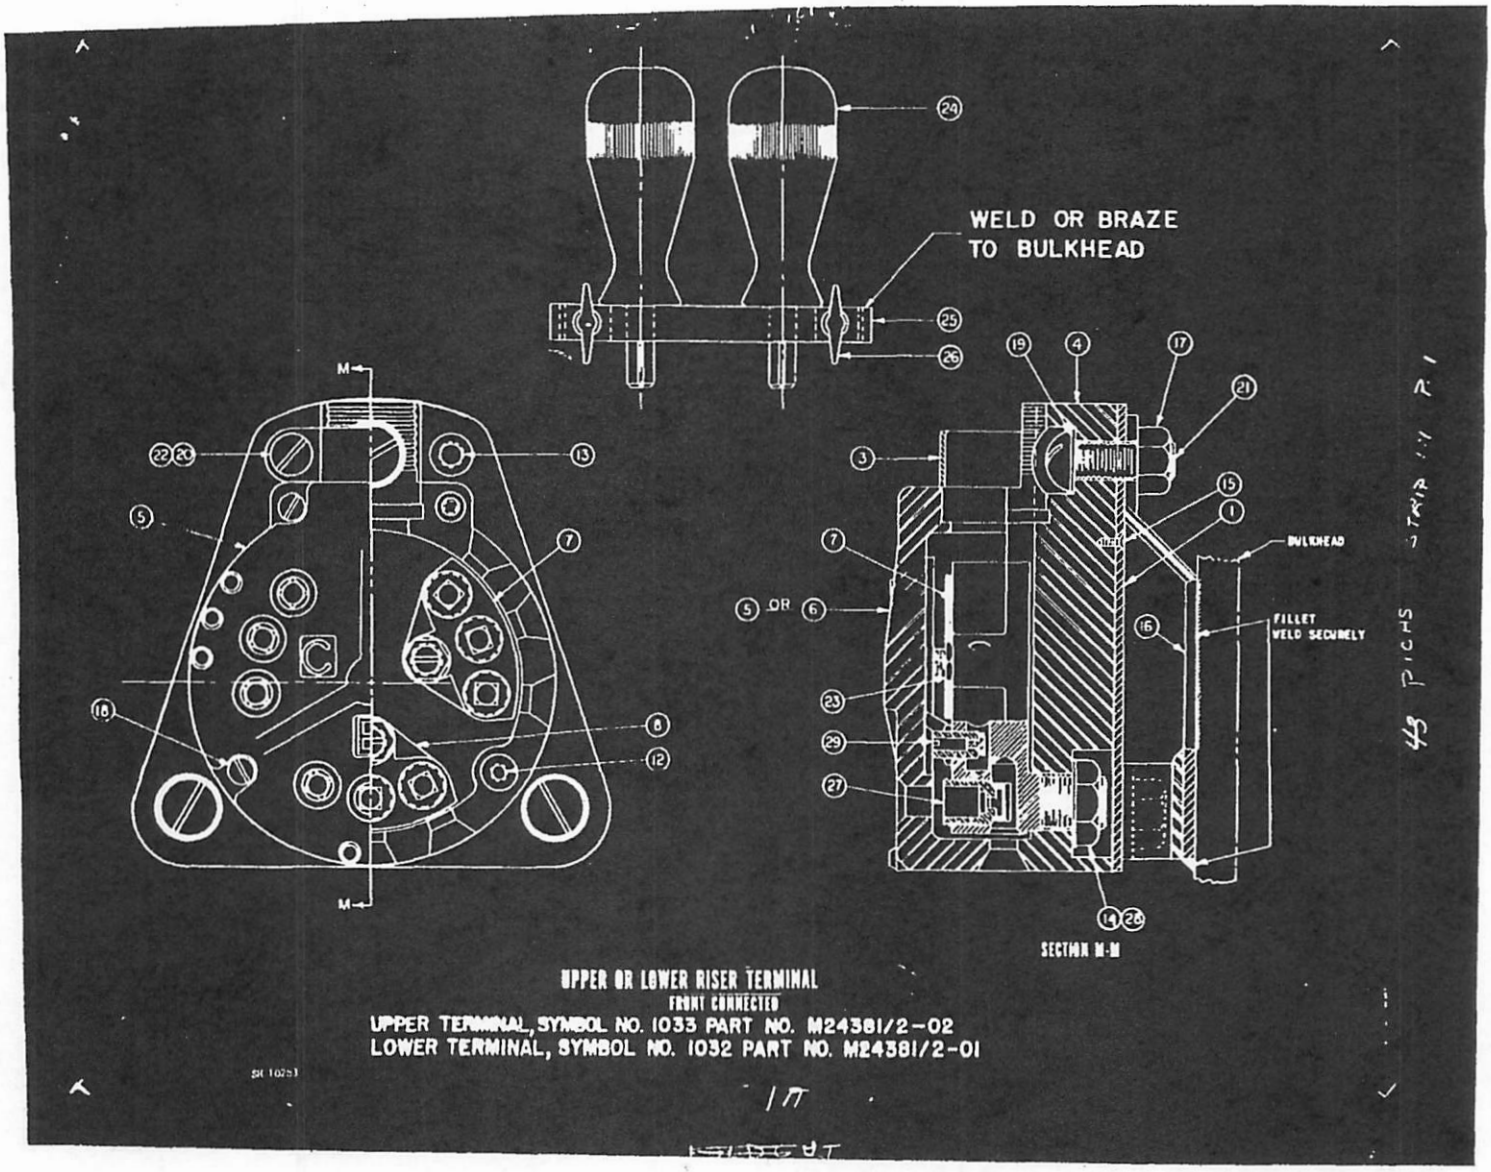



NOTE: Supersedes NAVSHIPS Drawing 9-S-5302-L.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

TOP

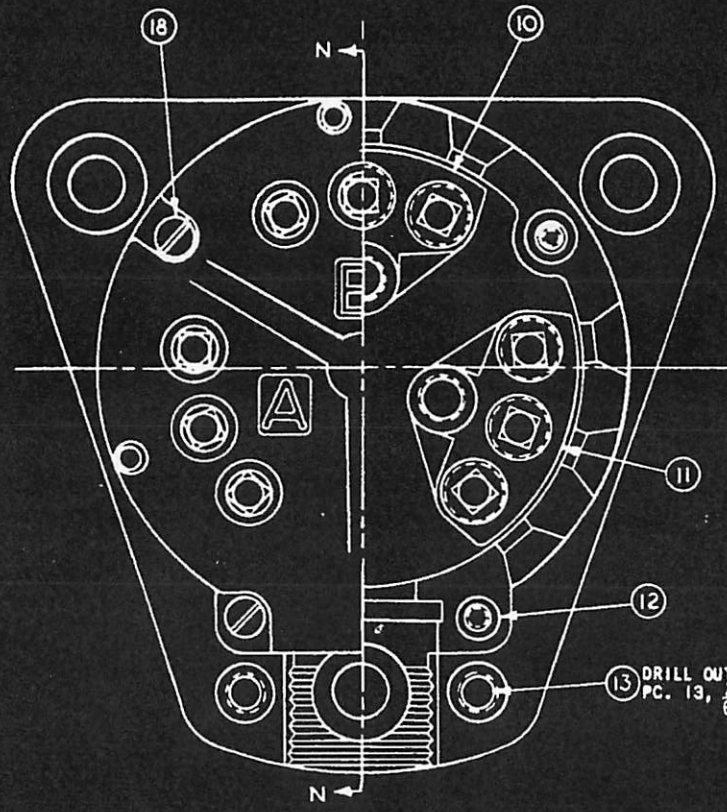

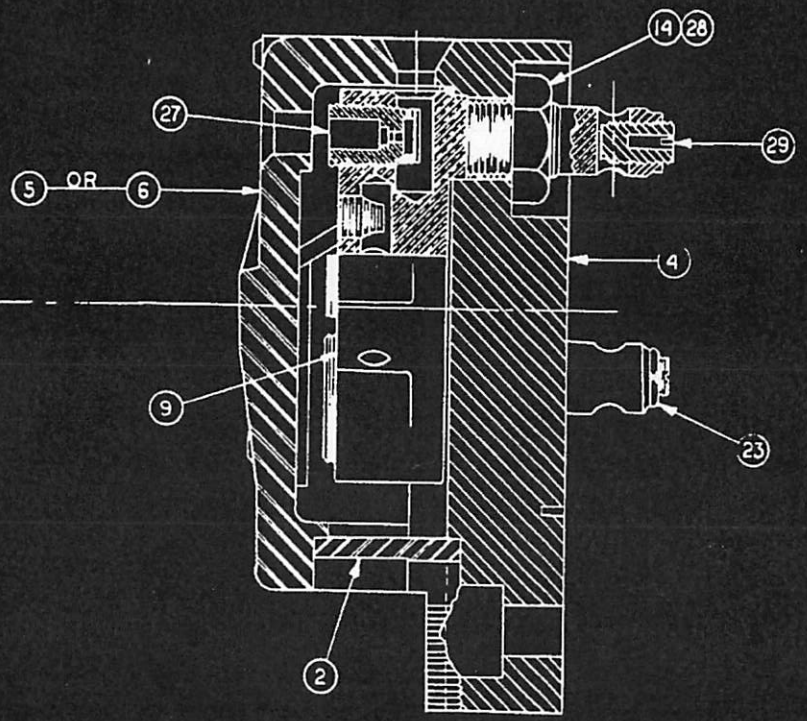

SECTION N-N

UPPER OR LOWER RISER TERMINAL
BACK CONNECTED


SYMBOL NO. 1034 PART NO. M24381/2-03

SH 1026L


154 PICAS

FOLDOUT

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

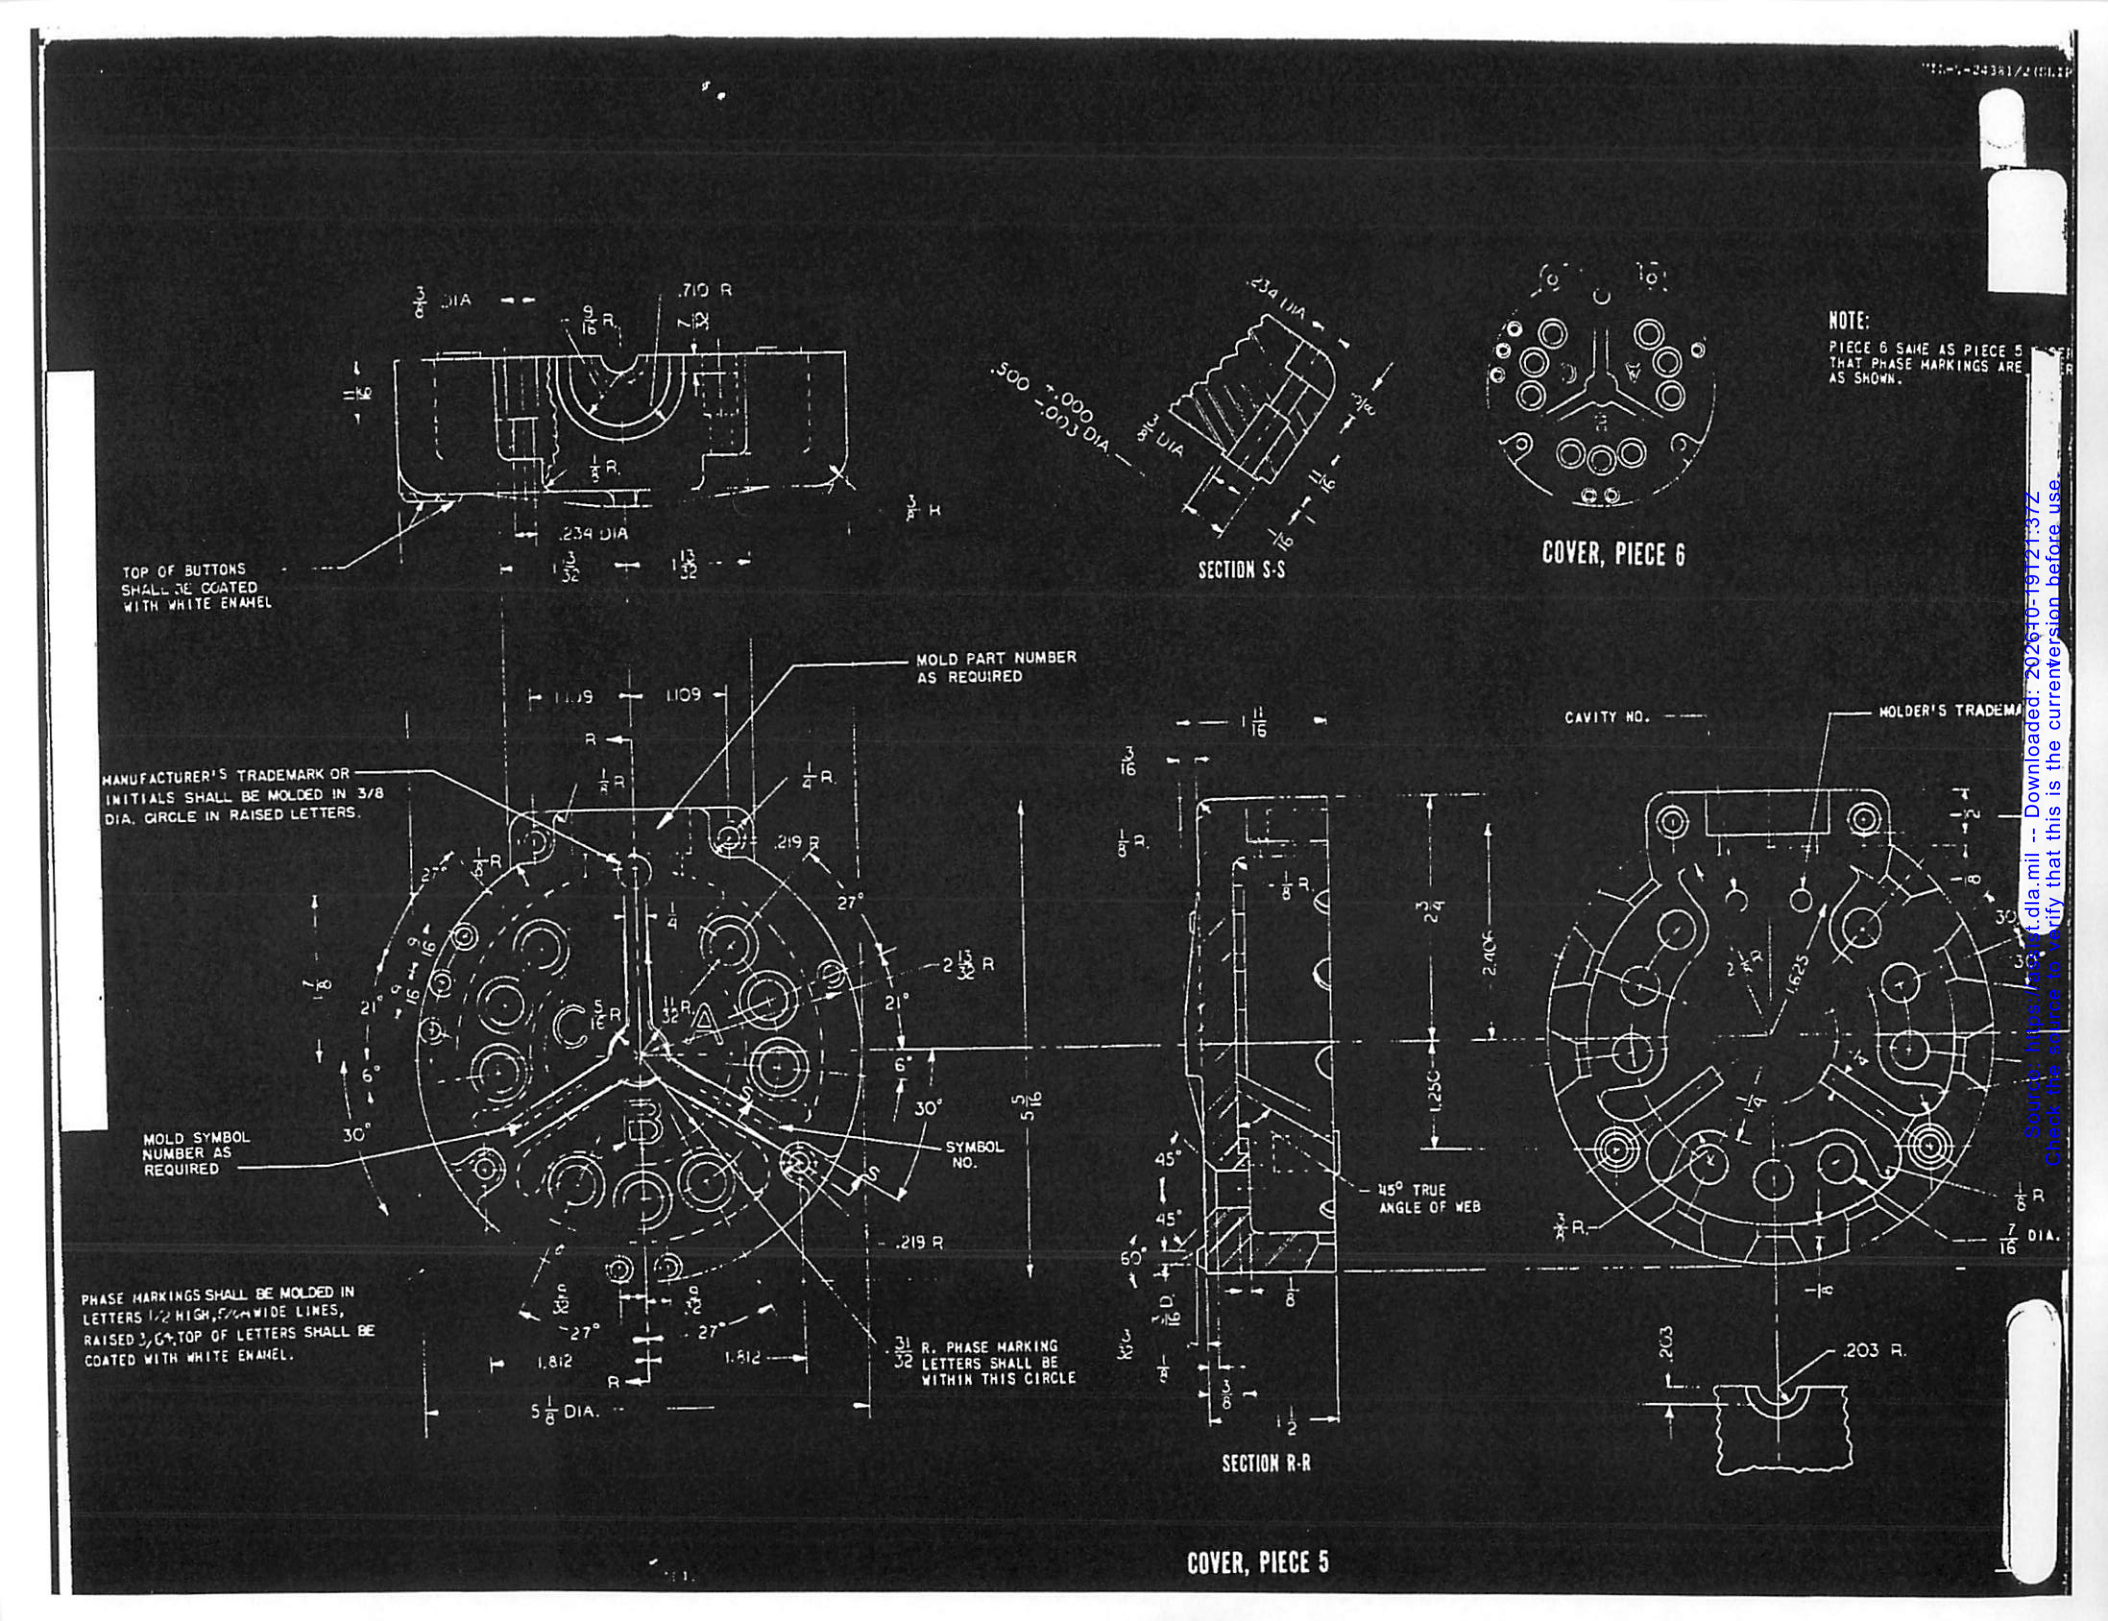


Source: https://landandmaps.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

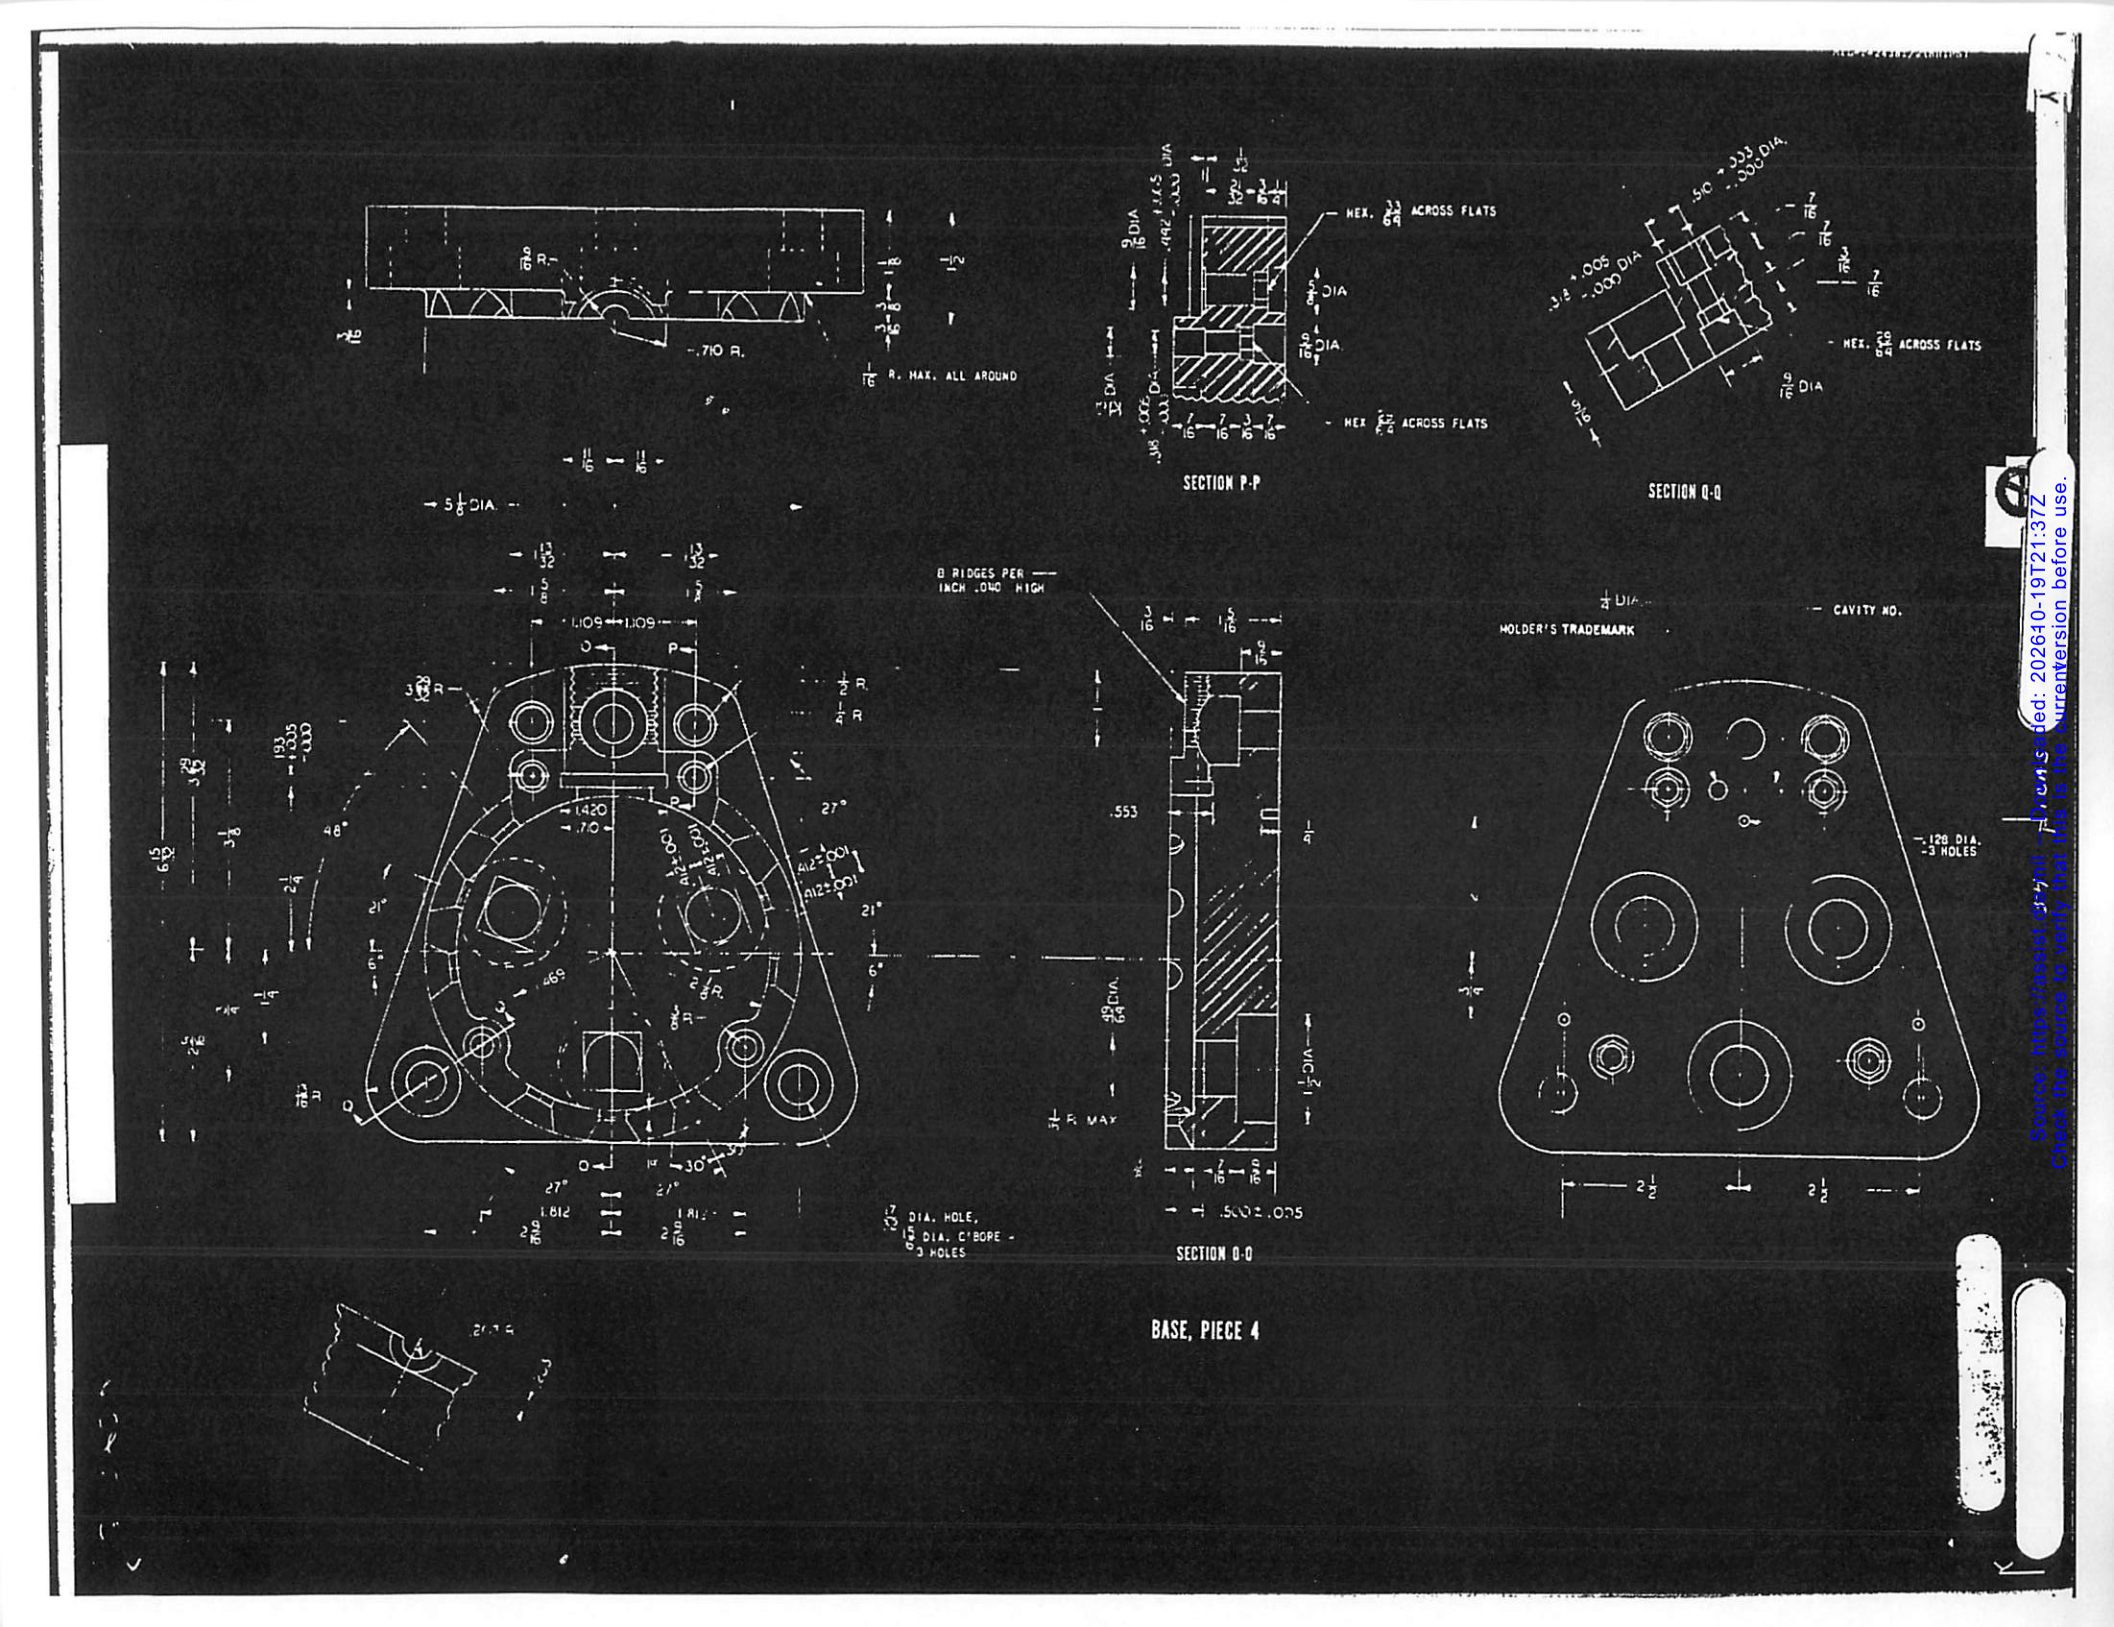

Source: https://assist.dla.mil - Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

NOTE:
SIMILAR COM'L EQUIVALENT
SATISFACTORY

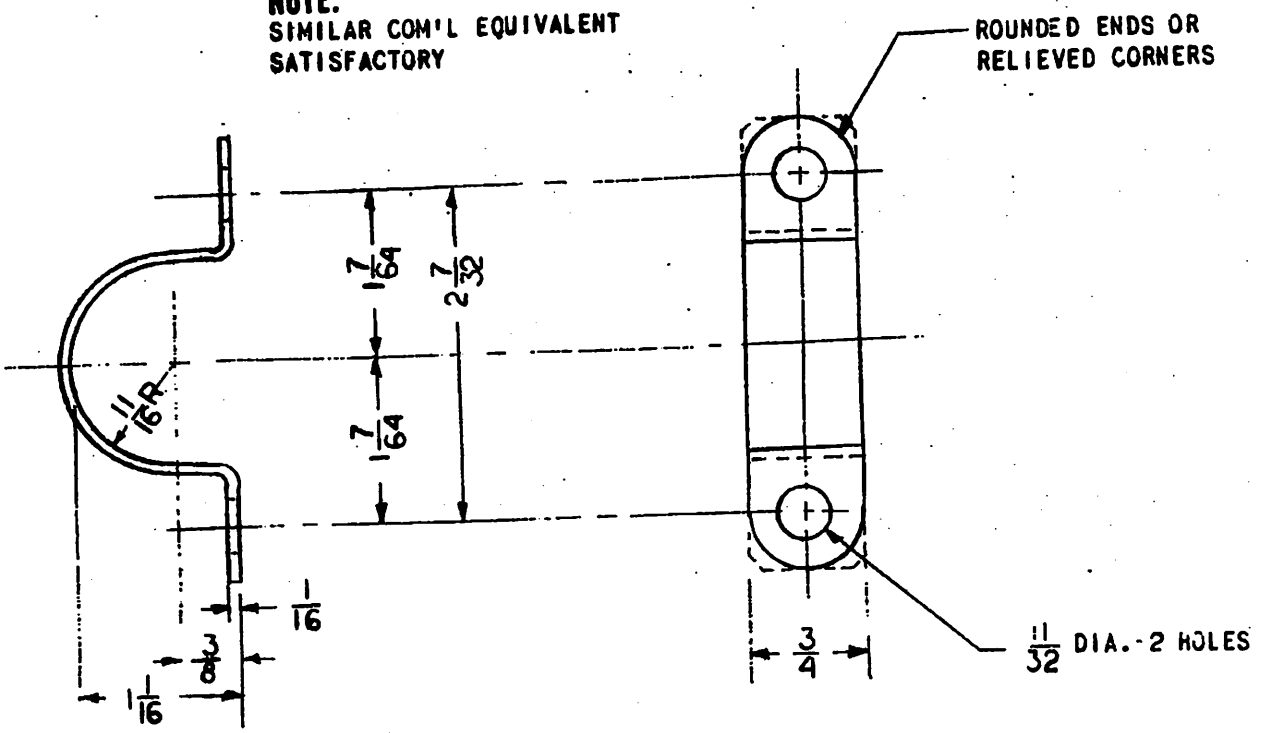


CABLE STRAP, PIECE 3

NOTE:
PIECE 8 SAME AS PIECE 7
EXCEPT AS SHOWN

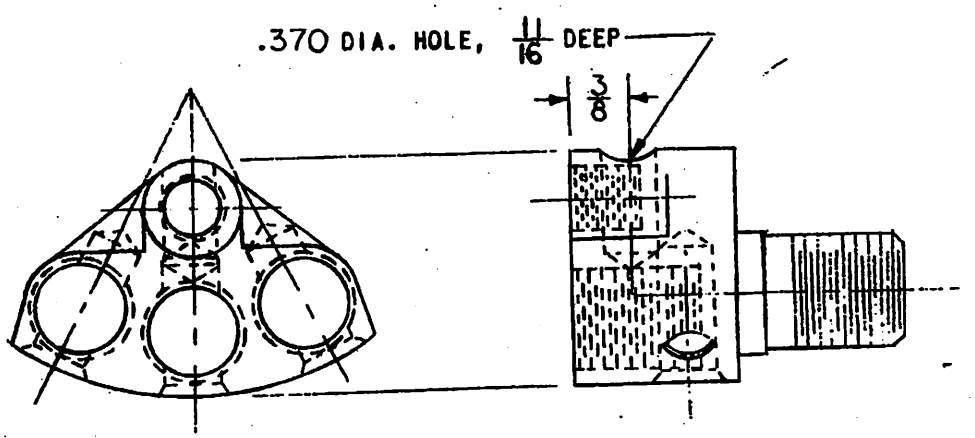

TERMINAL, PIECE 8


Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

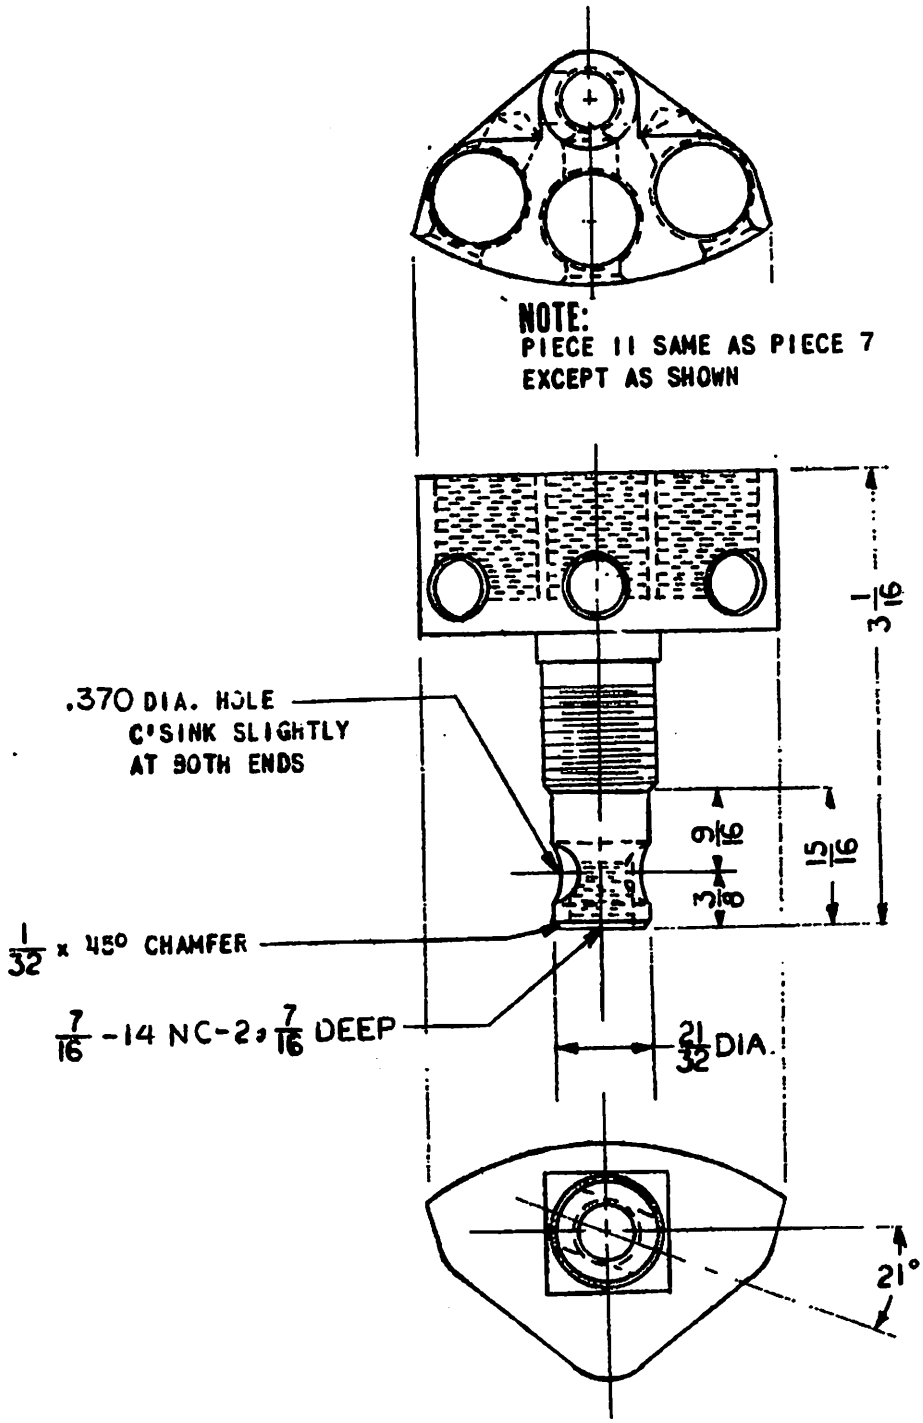

TERMINAL, PIECE 11

SH 10289

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

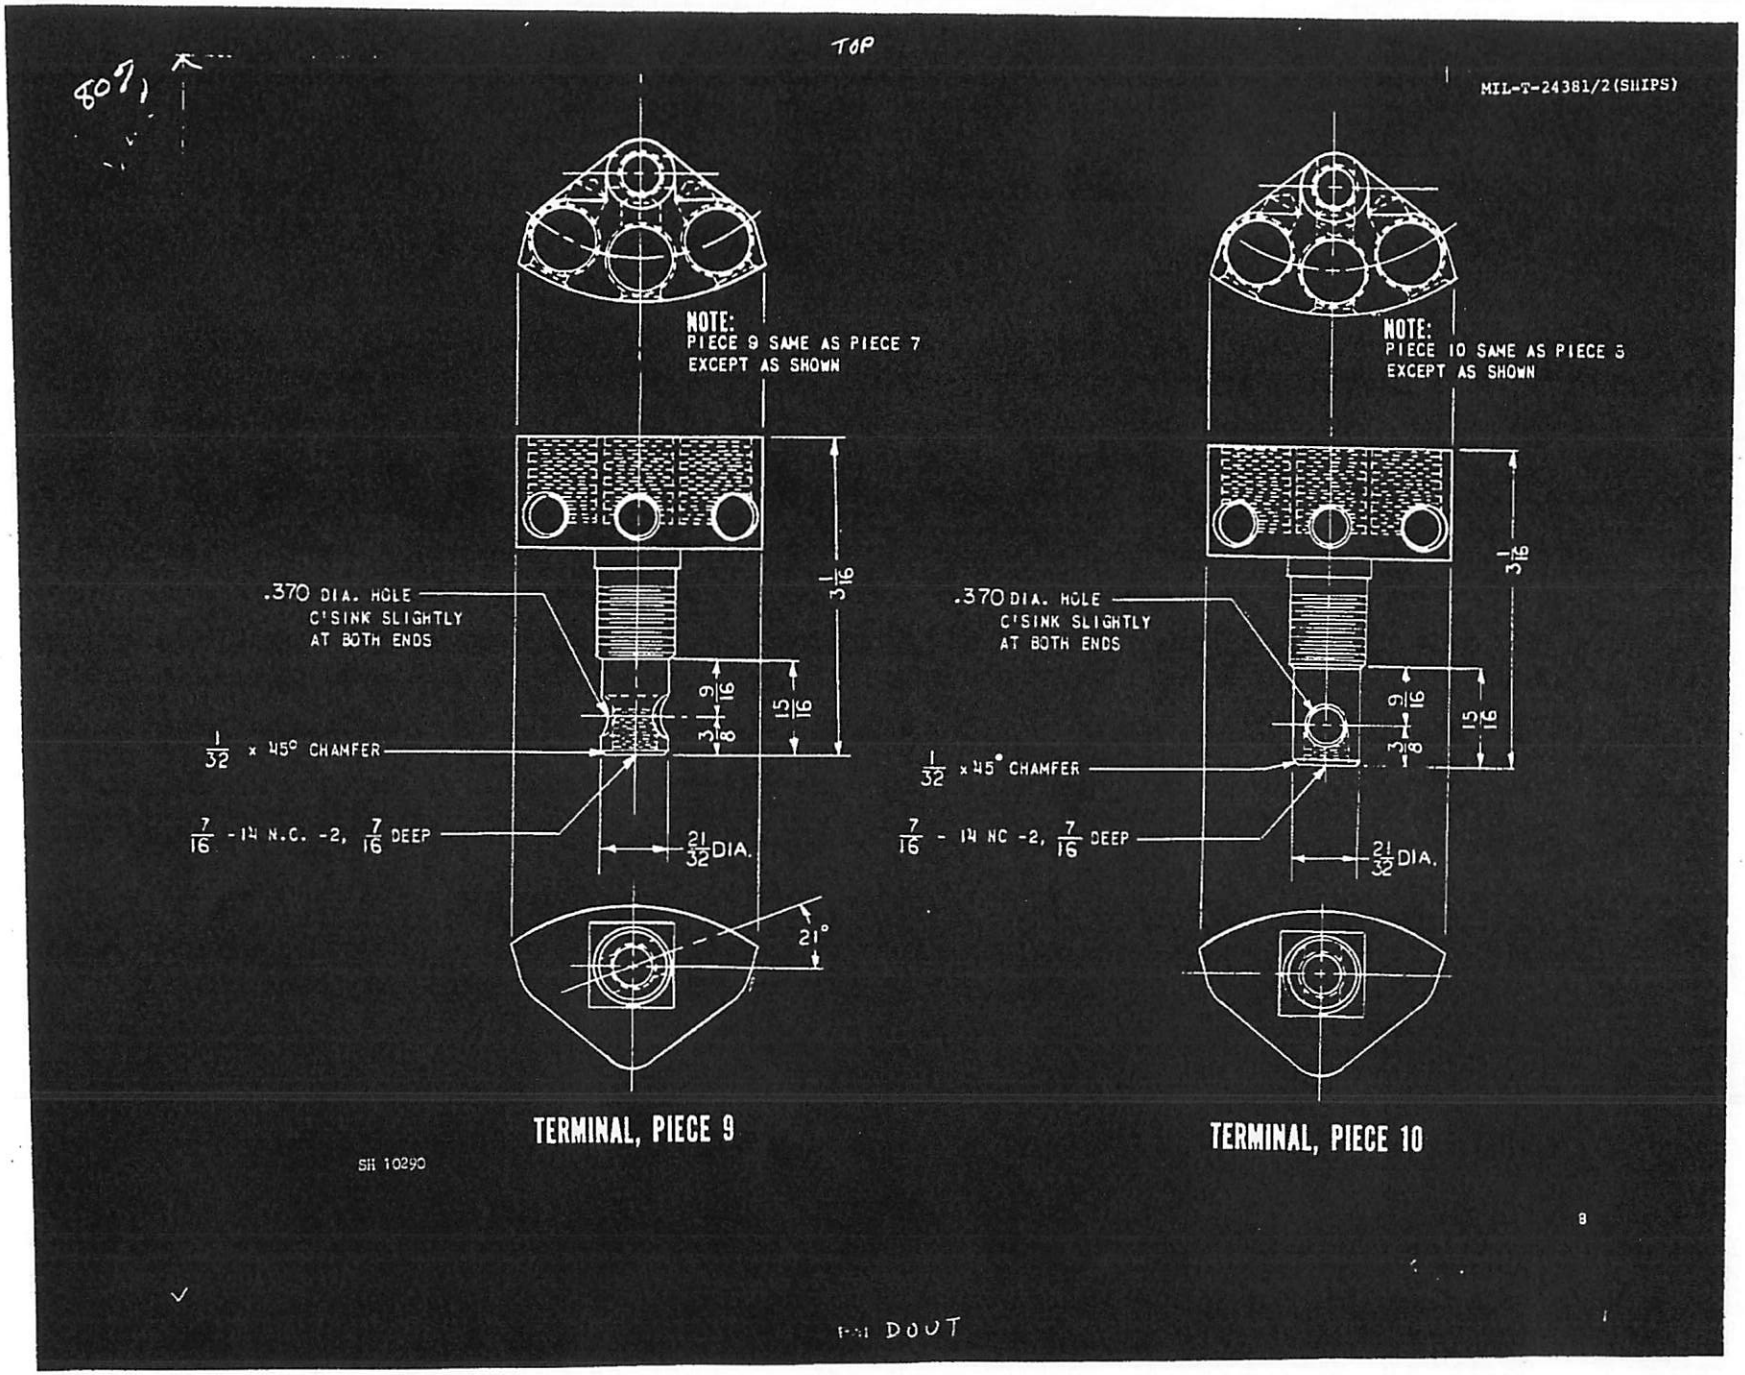


TERMINAL, PIECE 9


TERMINAL, PIECE 10

SH 10290


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

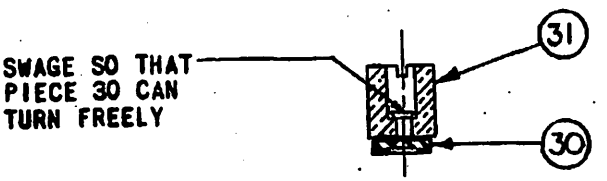

TERMINAL SCREW ASSEMBLY, PIECE 29

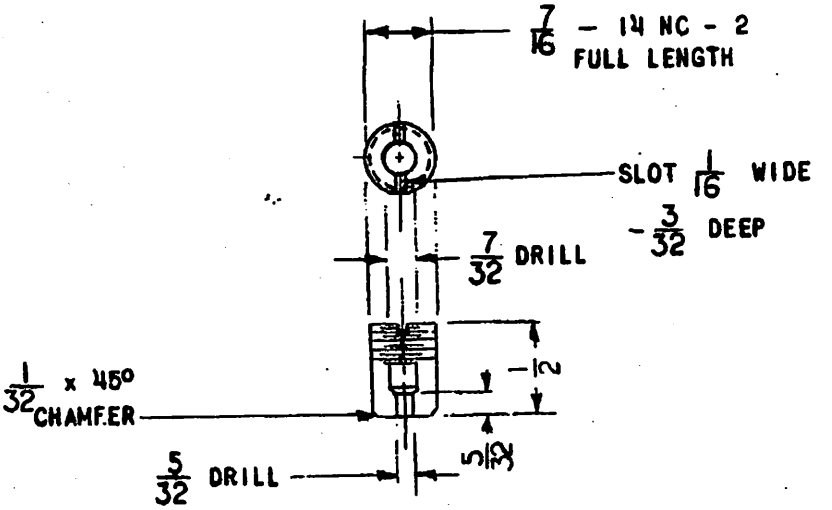


MAIN TERMINAL SCREW, PIECE 31

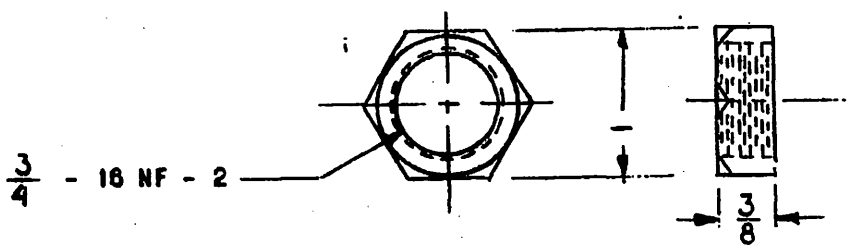


NUT, PIECE 14


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

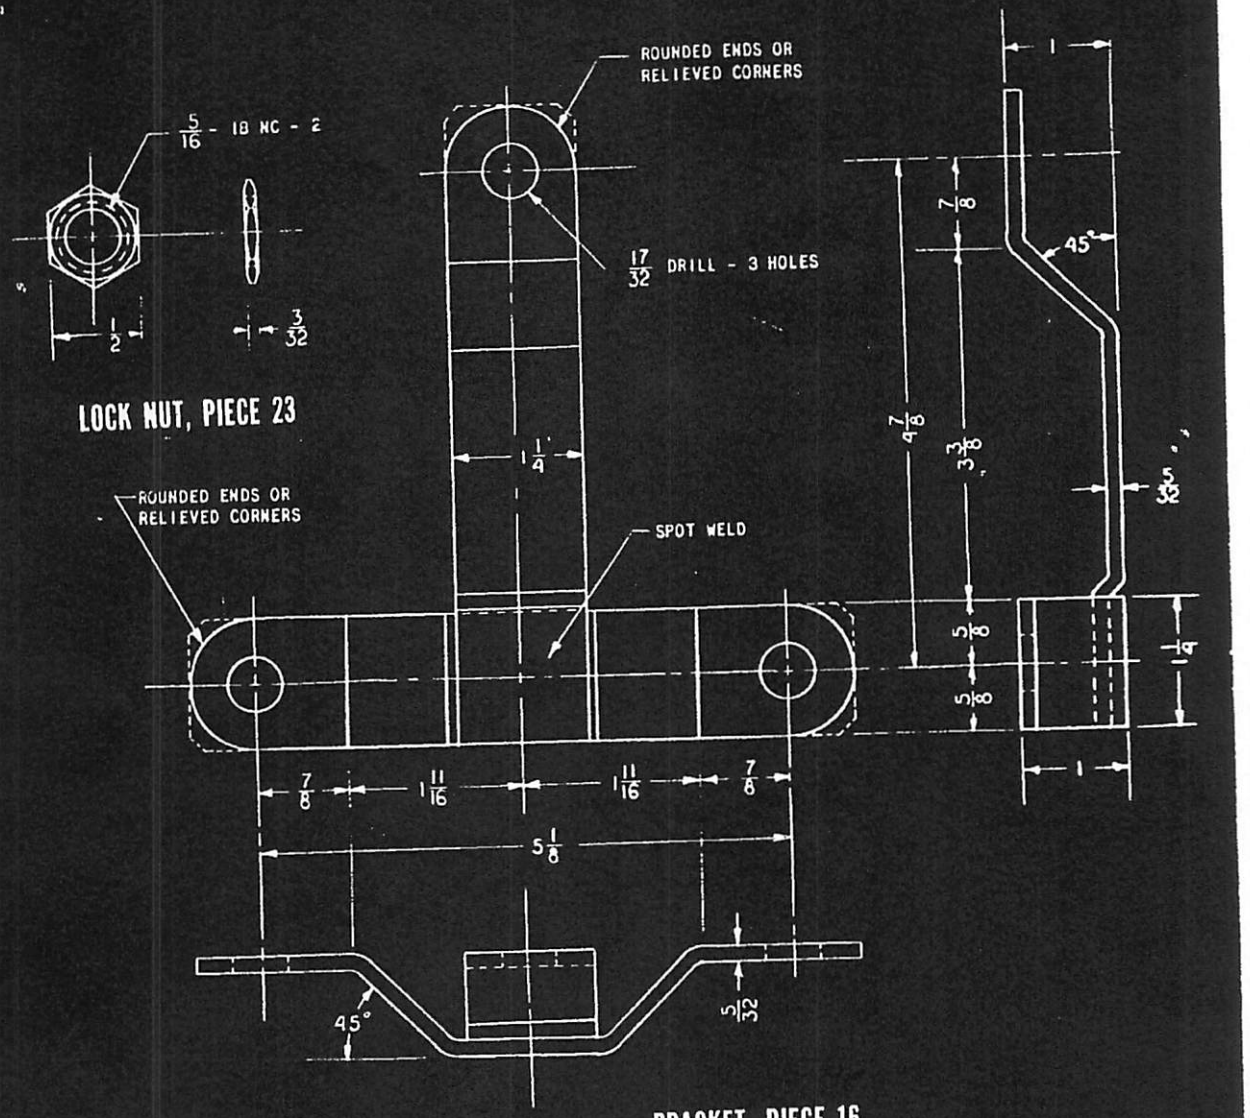


Source: https://assist.dla.mil -- Downloaded: 20260-19T21:37Z
Check the source to verify that this is the current version before use.

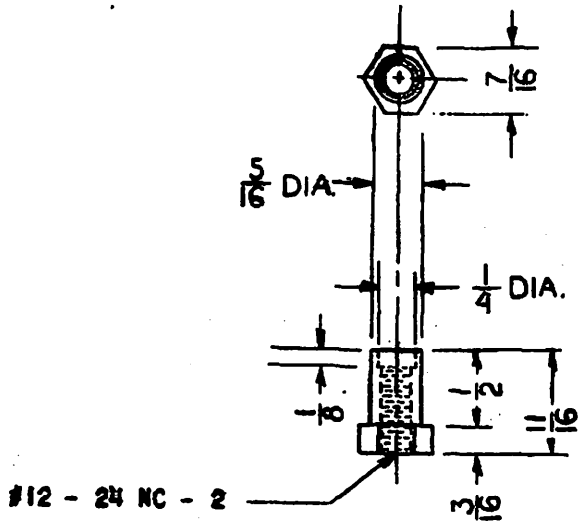


INSERT, PIECE 12

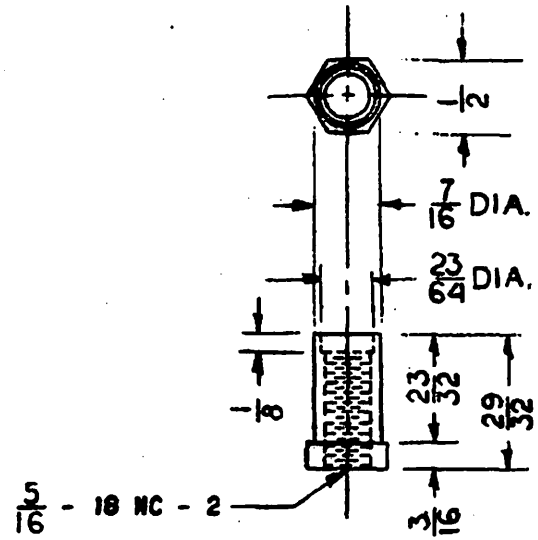

INSERT, PIECE 13

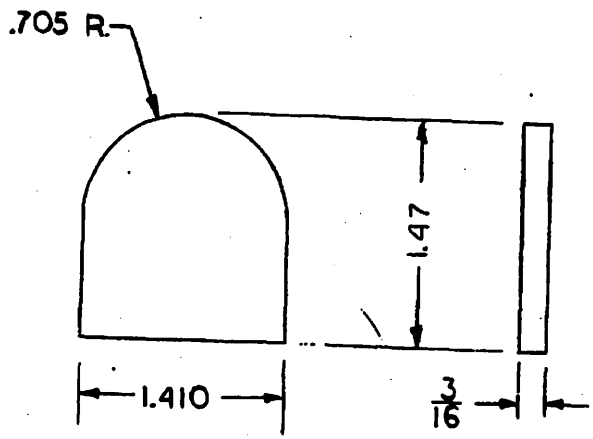


PLUG, PIECE 2

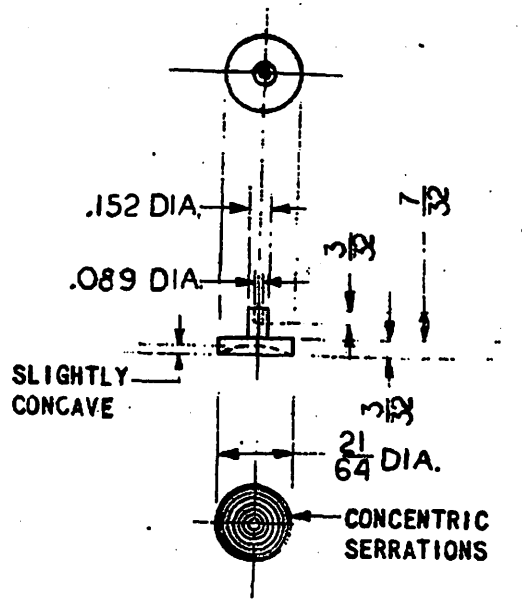

PRESSURE DISK, PIECE 30

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

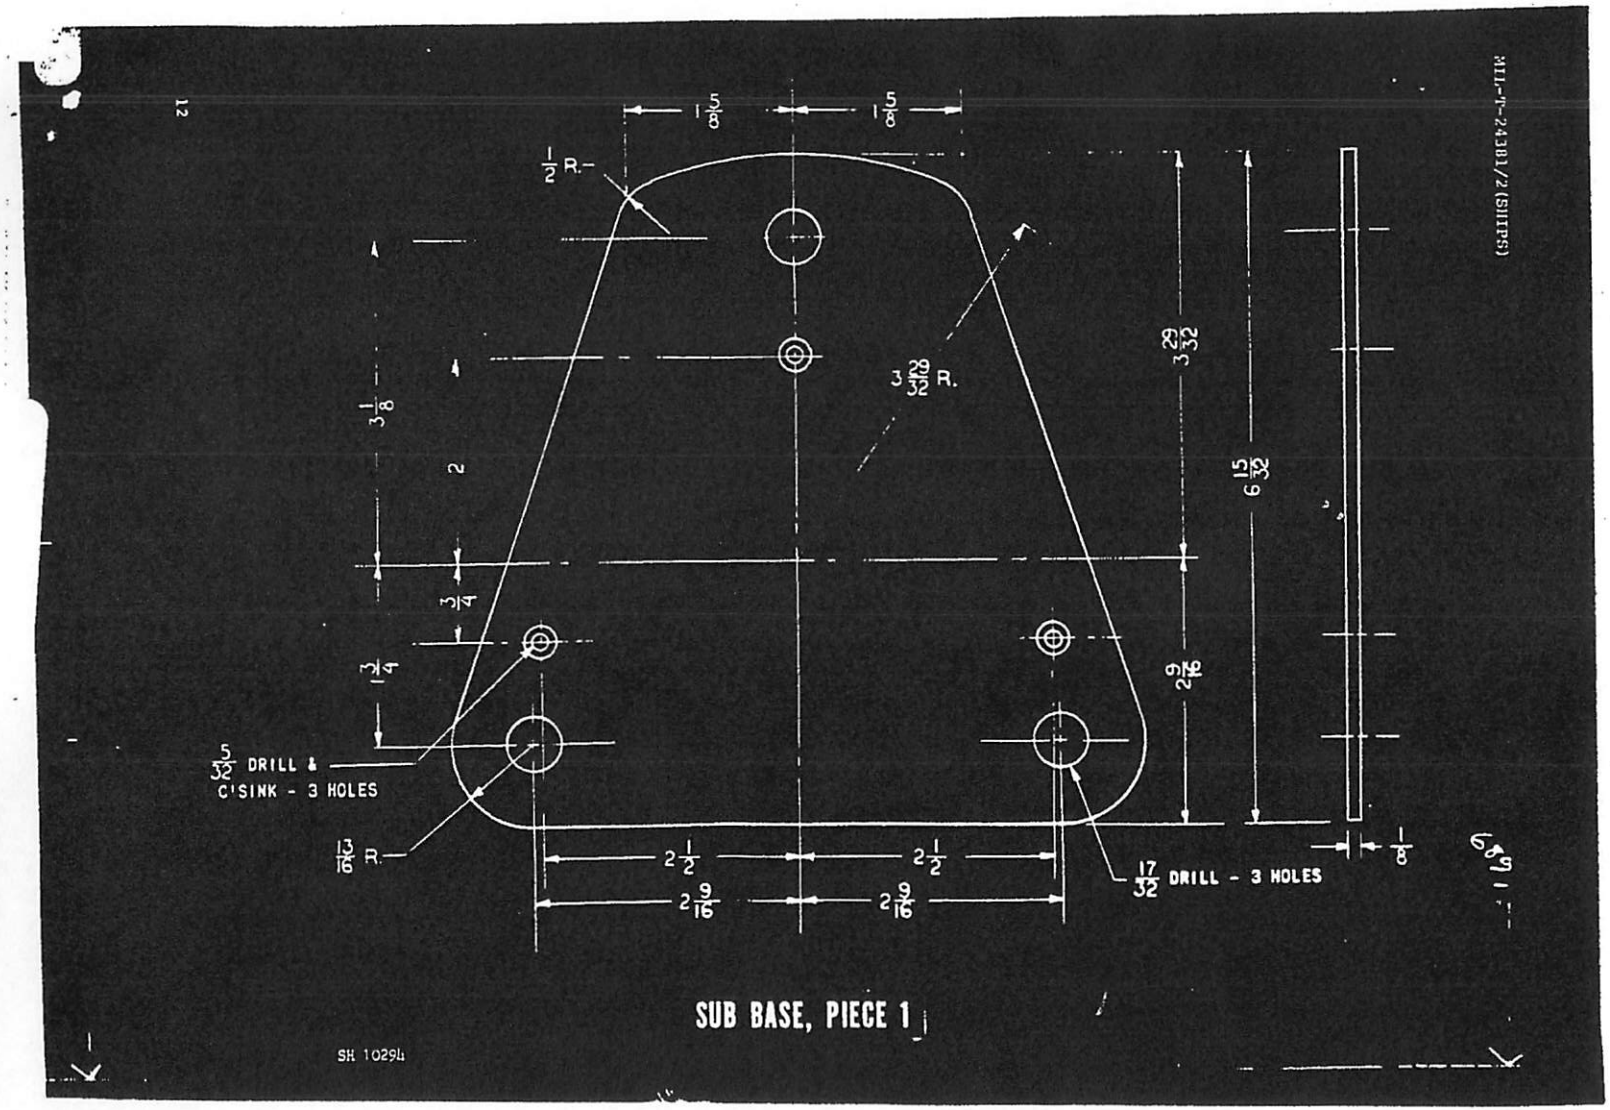

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

List of material

Quantities are for one a.c. riser terminal

Piece number	Name of piece	Number required				Material	Material specifications	Finish	Remarks
		Back conn.		Front conn.					
		Upper	Lower	Upper	Lower				
1	Sub base			1	1	Lam. phenolic type GME	MIL-P-15037		
2	Plug	1	1			Lam. phenolic type GME	MIL-P-15037		
3	Cable strap			1	1	Steel	Coml	Zinc	
4	Base	1	1	1	1	Mold plastic type MAI-60	MIL-M-14	Gray	1/
5	Cover (for lower riser term.)		1		1	Mold plastic type MAI-60	MIL-M-14	Gray	1/
6	Cover (for upper riser term.)	1		1		Mold plastic type MAI-60	MIL-M-14	Gray	1/
7	Terminal			2	2	Cast copper alloy (alloy B2)	QQ-C-390		
8	Terminal			1	1	Bronze	Coml		
9	Terminal	1	1			Bronze	Coml		
10	Terminal	1	1			Bronze	Coml		
11	Terminal	1	1			Bronze	Coml		
12	Insert	4	4	4	4	Brass	Coml		
13	Insert	2	2	2	2	Brass	Coml		
14	Nut	3	3	3	3	Brass	Coml		
15	6 F.H. self-tapping scr. 5/16" lg.			3	3	Steel	Coml	Zinc	
16	Bracket			1	1	Steel	Coml	Zinc	
17	1/2" - 13 hex nut			3	3	Steel	Coml	Zinc	
18	#12-24 r.h. mach. scr. 2" lg.	4	4	4	4	Steel	Coml	Zinc	
19	Shakeproof washer for 1/2" - 13 bolt			3	3	Steel	Coml	Zinc	
20	5/16"-18 r.h. mach. scr. 1" long			2	2	Steel	Coml	Zinc	
21	1/2"-13 r.h. mach. scr. 1-3/8" long			3	3	Steel	Coml	Zinc	
22	Shakeproof washer for 5/16"-18 scr.			2	2	Steel	Coml	Zinc	
23	Lock nut	3	3	3	3	Brass	Coml		
24	Tool handle assembly	2	2	2	2				See pc. 16 on MIL-T-24381/1 for det's
25	Tool rack assembly	1	1	1	1				See pc. 19 on MIL-T-24381/1 for det's
26	Wing screw	2	2	2	2				See pc. 22 on MIL-T-24381/1 for det's
27	Terminal screw assembly	9	9	9	9				See pc. 1 on MIL-T-24381/1 for det's
28	Shakeproof washer for 3/4"-16 scr.	3	3	3	3	Bronze	Coml		
29	Terminal screw assembly	3	3	3	3				
30	Pressure disk	3	3	3	3	Brass	Coml		
31	Main terminal screw	3	3	3	3	Brass	Coml		

1/ Molded plastic type MMI-30 (natural) may be substituted for type MAI-60 (gray).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

All dimensions in inches unless otherwise specified	
Tolerances are:	
Fractions	± 1/64
Decimals.	± .005
Angles.	± 1/4°degree

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. A.c. riser terminals shall be designed for use with main cable, type TSGU-75 of MIL-C-915/30 and branch cable, type THOF-42 of MIL-C-915/6.
3. Hex-head "spin over" locked skirt inserts for cover securing screws and cable clamps screws shall be provided.
4. Electrical rating: 200-ampere, 500-volt, a.c. three-phase.
5. Cover for a.c. riser terminal is covered by MIL-T-24381/6.
6. Part numbers as follows:

   Upper terminal, front connected: M24381/2-02
   Lower terminal, front connected: M24381/2-01.
   Upper or lower, back connected: M24381/2-03.

Preparing activity:
Navy - SH
(Project 5940-N557)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T21:37Z
Check the source to verify that this is the current version before use.