
MILITARY SPECIFICATION SHEET

TERMINAL, CASUALTY POWER, TERMINAL BLOCK, SINGLE POLE,

200-AMPERE, 120-VOLT, DIRECT CURRENT SYMBOL NUMBER 1035

The complete requirements for procuring the terminal described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).

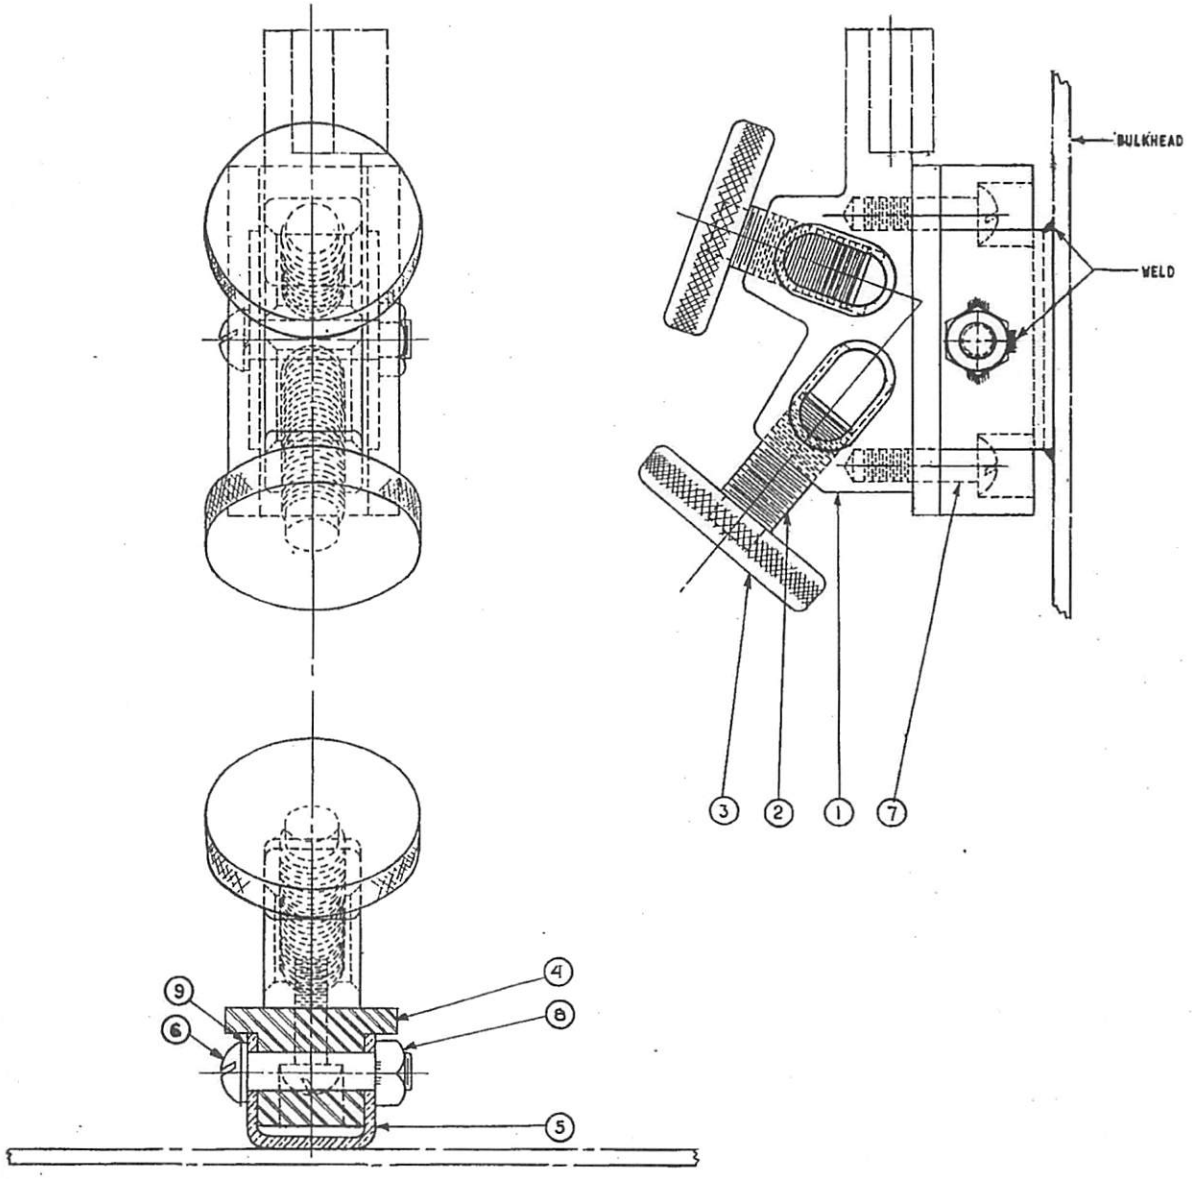

D. C. TERMINAL BLOCK
SYMBOL NO. 1035, PART NO. M24381/3-01


SH 10295

NOTE: Supersedes NAVSHIPS Drawing 9-S-5288-L.

THIS DOCUMENT CONTAINS 6 PAGES

FSC 5940


Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.

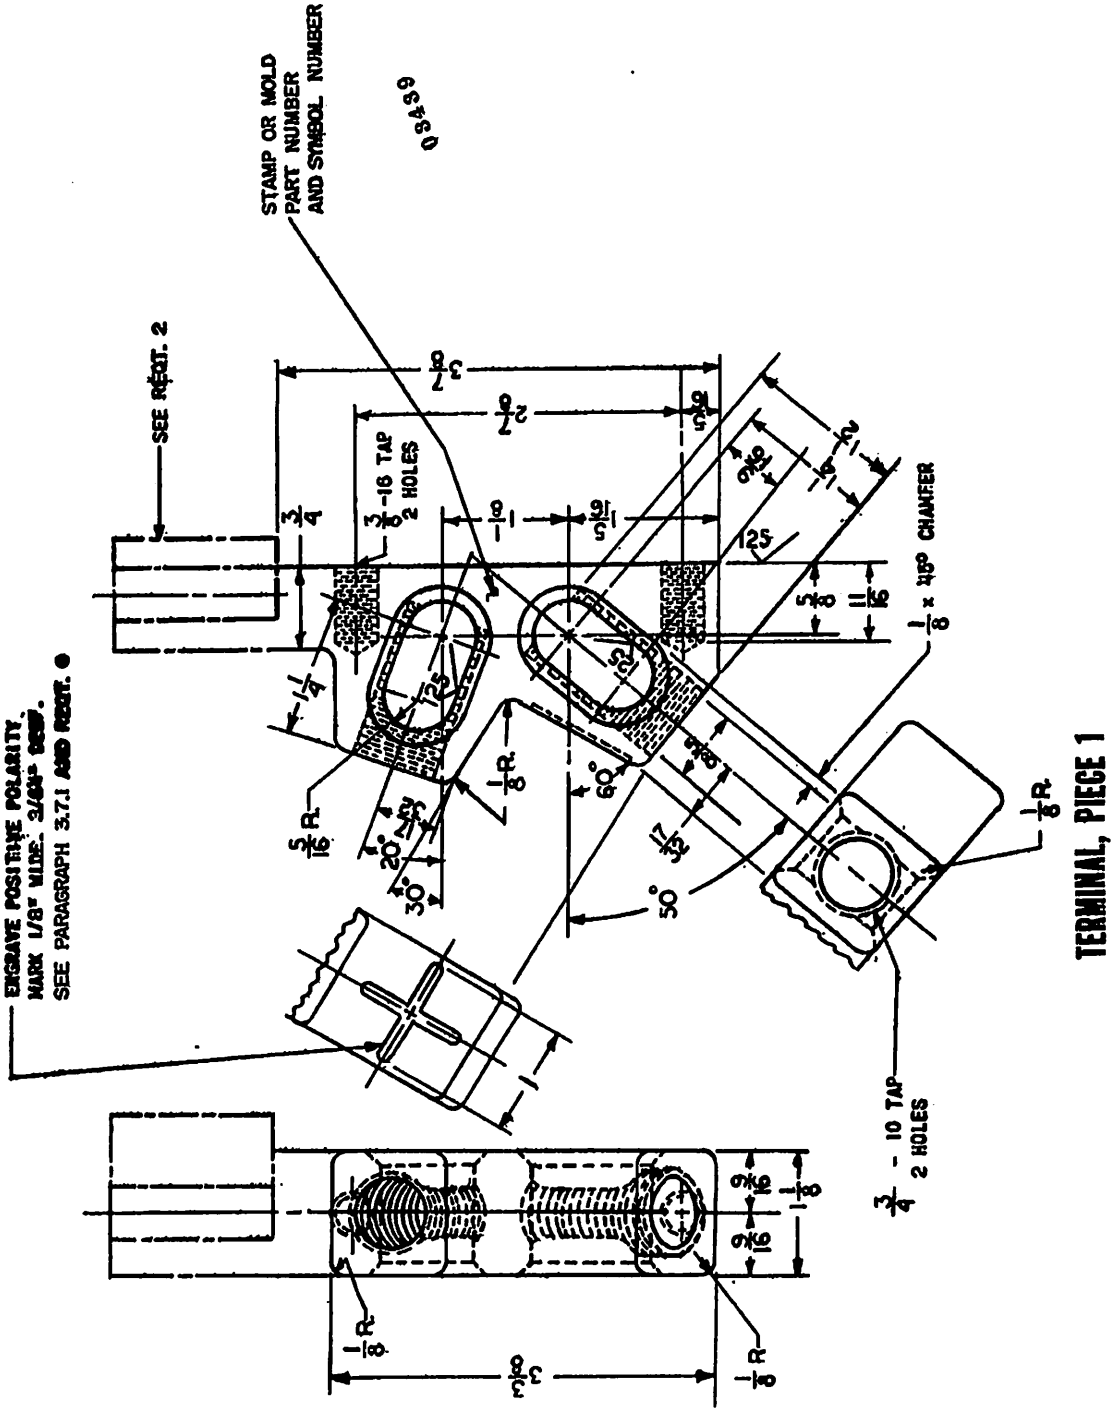


Source: https://assist.dla.mil -- Downloaded: 20261O-19T21:37Z
Check the source to verify that this is the current version before use.

NOTE:

CUT FROM SHEET 2" THICK SO THAT LAMINATIONS WILL BE PERPENDICULAR TO THIS SURFACE.

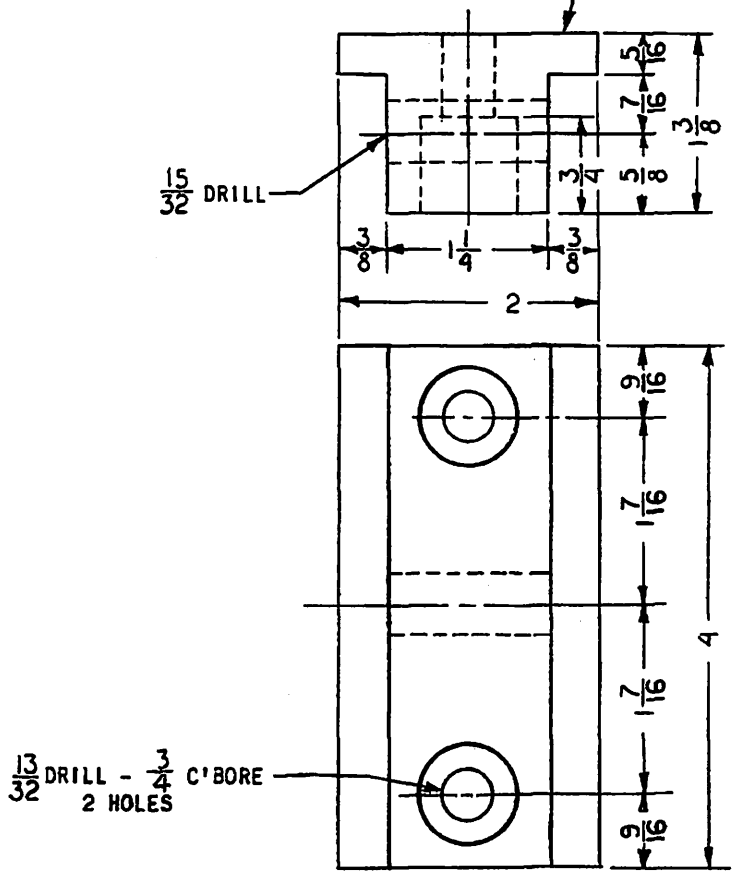


BASE, PIECE 4

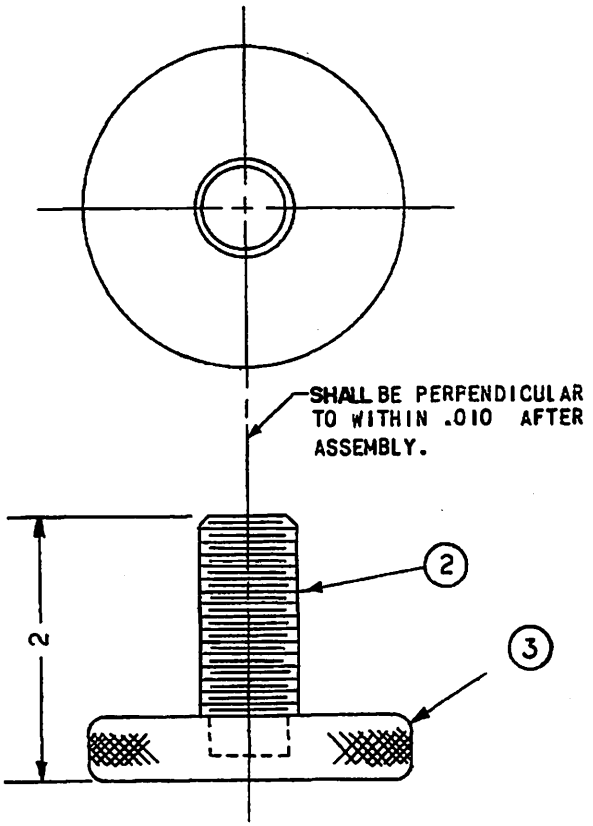


TERMINAL SCREW ASSEMBLY, PIECE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

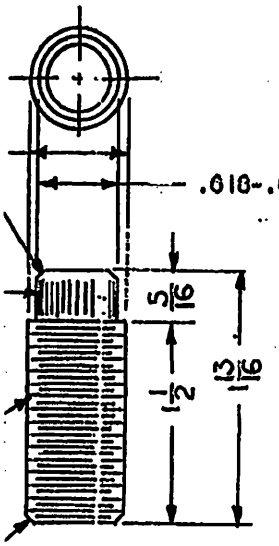


L SCREW, PIECE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

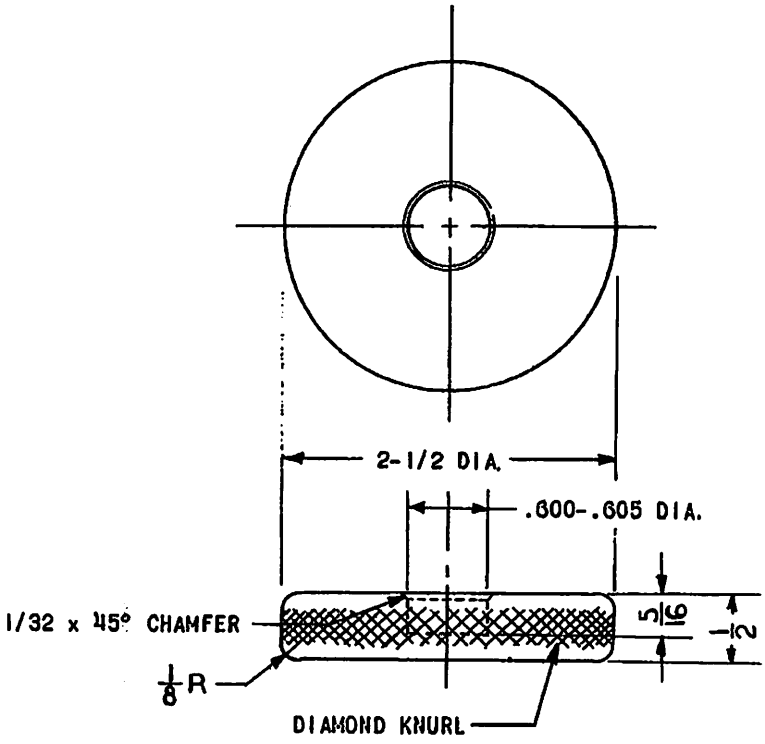

TERMINAL SCREW HANDLE, PIECE 3

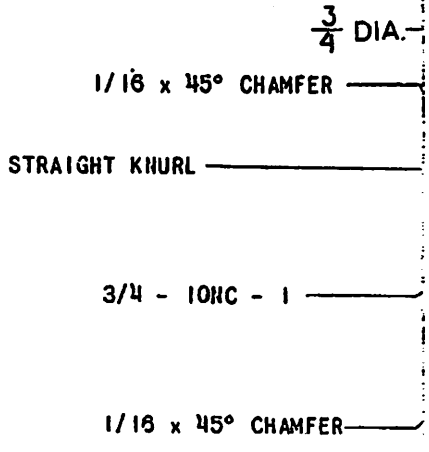

TERMINA

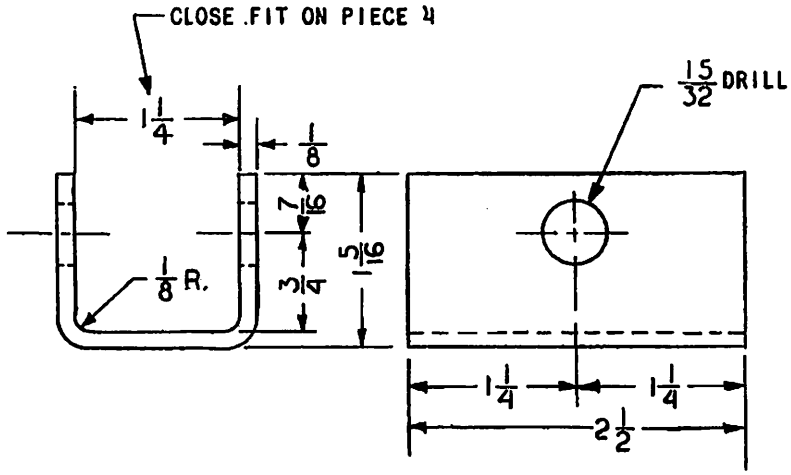

BRACKET, PIECE 5

SH 10298

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:37Z
Check the source to verify that this is the current version before use.

List of material						
Quantities are for one d.c. terminal block						
Piece number	Name of piece	No. req.d	Material	Material specification	Finish	Remarks
1	Terminal	1	Cast copper alloy alloy number X2	QQ-C-390		
2	Terminal screw	2	Brass	QQ-B-626		
3	Terminal screw handle	2	Mold plastic type MAI-60	MIL-M-14		
4	Base, insulating	1	Glass melamine type GME	MIL-P-15037		
5	Bracket	1	Brass	QQ-B-626		
6	7/16"-14 r.h. mach. screw 2" lg.	1	Brass	Coml		
7	3/8"-16 r.h. mach. screw 1-1/4" lg.	2	Brass	Coml		
8	7/16"-14 Hex. nut	1	Brass	Coml		
9	Shakeproof washer for pc. 5	1	Phos bronze	Coml		
10	Terminal screw assembly	2				

All dimensions in inches, unless otherwise specified

Tolerances are:

Decimals . . . . . ± .005
Fractions . . . . . ∓ 1/32
Angles. . . . . ∓ 1/2°degree

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Cable gripping portion of the terminal piece 1, as shown by dot-dash lines, shall be in accordance with MIL-E-16366, for standard copper conductor 150(61) (See MIL-C-915).
3. Electrical rating: 120 volts, d.c.; 200 amperes.
4. Terminal, piece 1 shall be furnished in pairs. One shall be marked, as shown herein for positive polarity; the other shall have no marking for negative.
5. Guard design for protection of this terminal is shown on MIL-T-24381/9.
6. Part number: M24381/3-01.

Preparing activity:
Navy - SH
(Project 5940-N558)

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:37Z
Check the source to verify that this is the current version before use.