
MILITARY SPECIFICATION SHEET

TERMINAL, CASUALTY POWER, BULKHEAD,

200-AMPERE, 120-VOLT, DIRECT CURRENT, SYMBOL NUMBER 1024

The complete requirements for procuring the terminal described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).

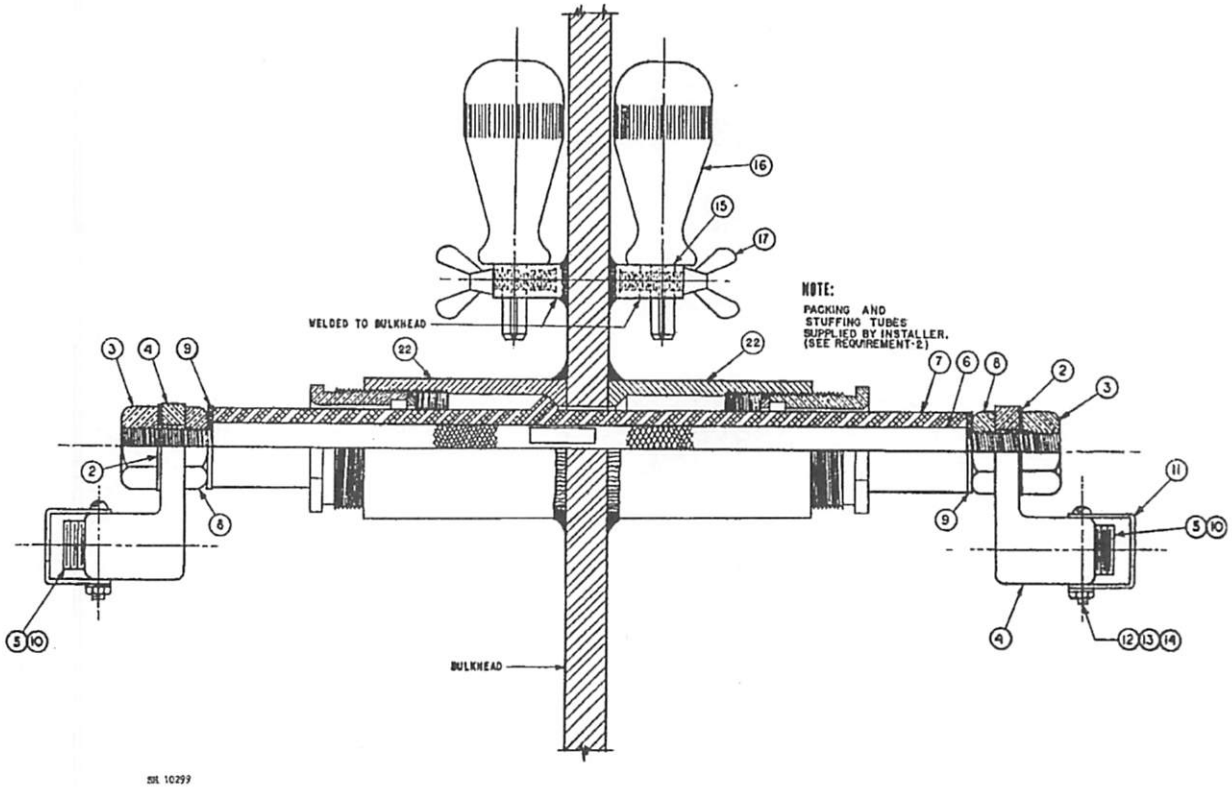

SYMBOL NO. 1024 PART NO. M24381/4-01.

NOTE: Supersedes NAVSHIPS Drawing 9-S-5358-L.


FSC 5940

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

TO BE SUPPLIED FOR MOUNTING ON THE BULKHEAD.

1 PLATE

" THICK

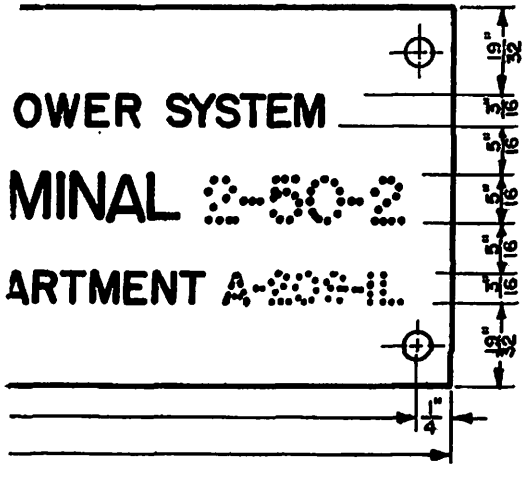


INAL IS INSTALLED
- BE CHANGED TO -

K FR 51 STBD.

AND SHOULD INDICATE

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:38Z
Check the source to verify that this is the current version before use.

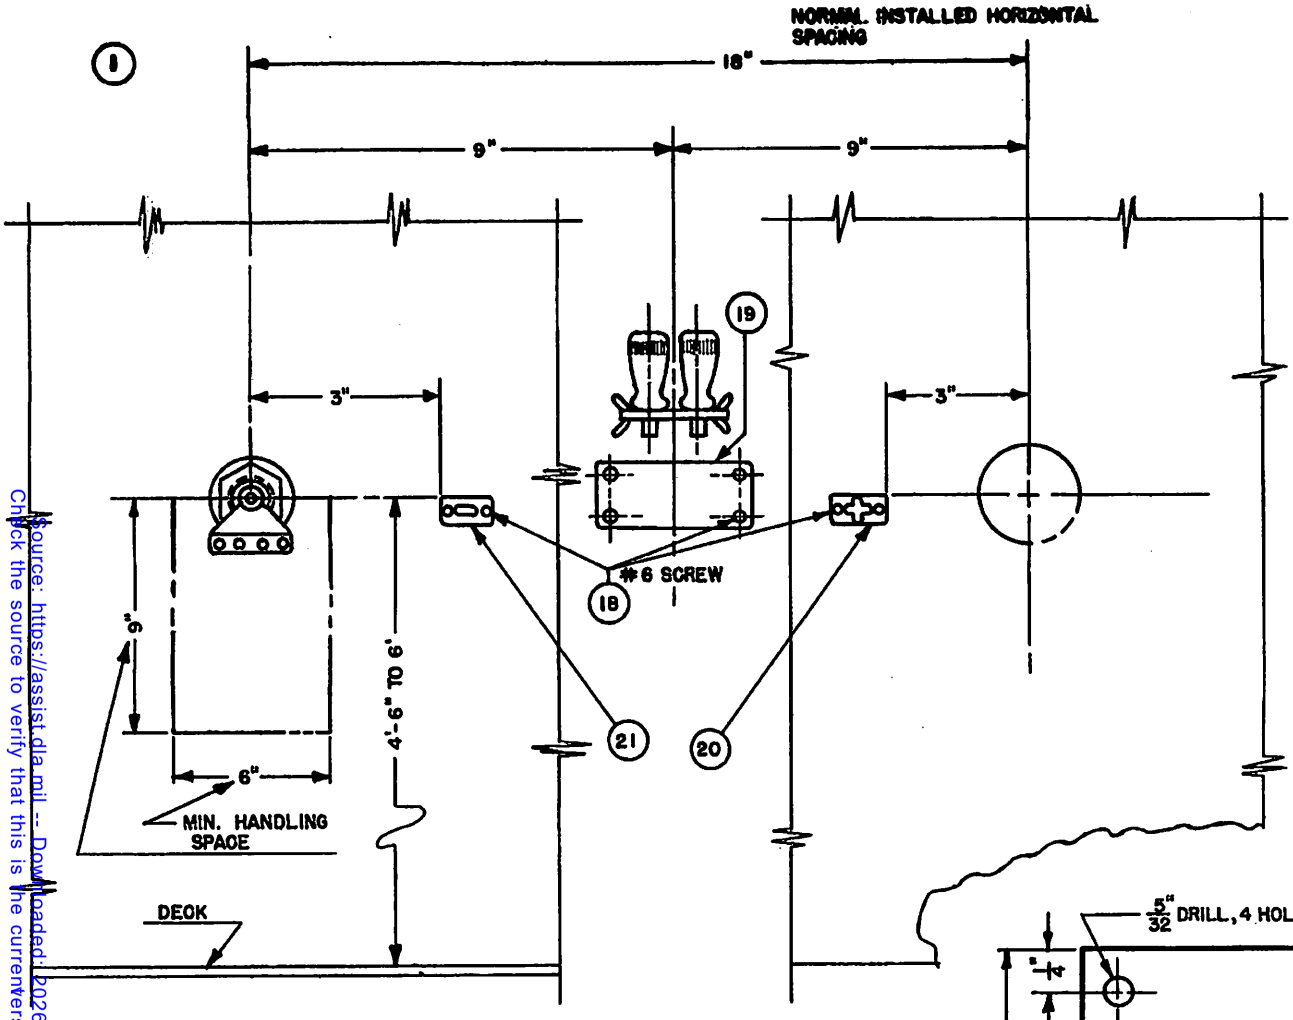


INSTRUCTION SHEET

'IEW SHOWING BULKHEAD TERMINAL INSTALLED

SCALE — 2' INCHES = 1 FOOT

INFORMATIO

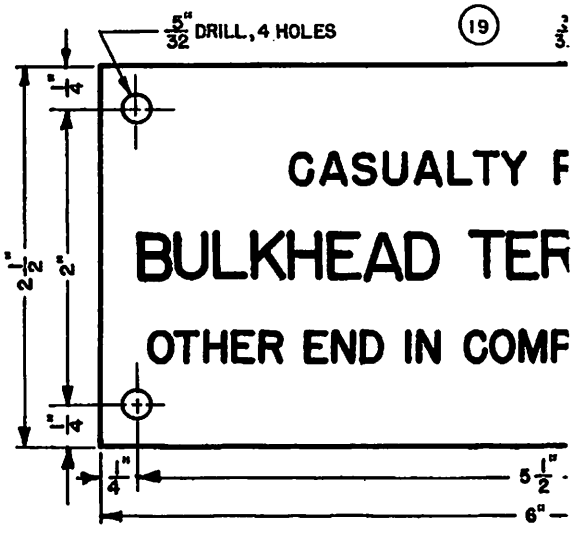

CASUALTY F

BULKHEAD TER

OTHER END IN COMF

WHEN THE OTHER END OF BULKHEAD TER
OUTSIDE ON A WEATHER DECK THIS LINE SHAI


OTHER END OUTSIDE, MAIN DE

MARKINGS SHOWN IN DOTTED IS TYPICAL ONLY
THE ACTUAL LOCATION IN THE SHIP

SH 10300


Source: https://assist.dla.mil -- Downloaded: 2026-10-19 21:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

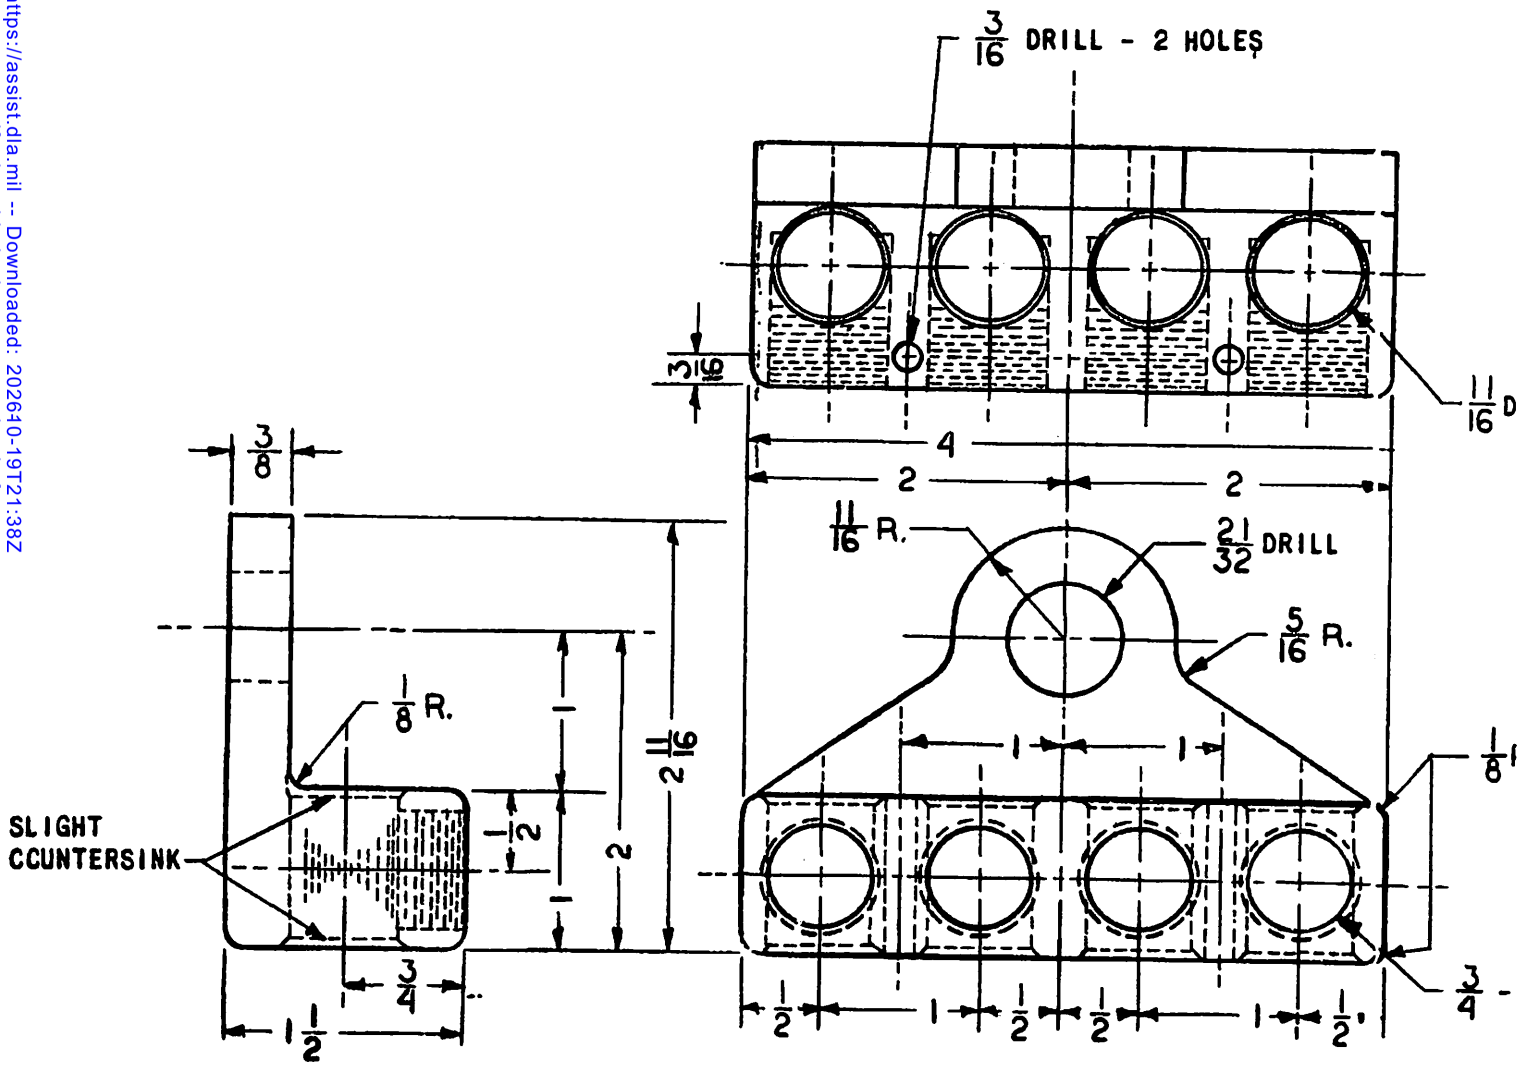


TERMINAL STUD, PIECE 4

SH 10301

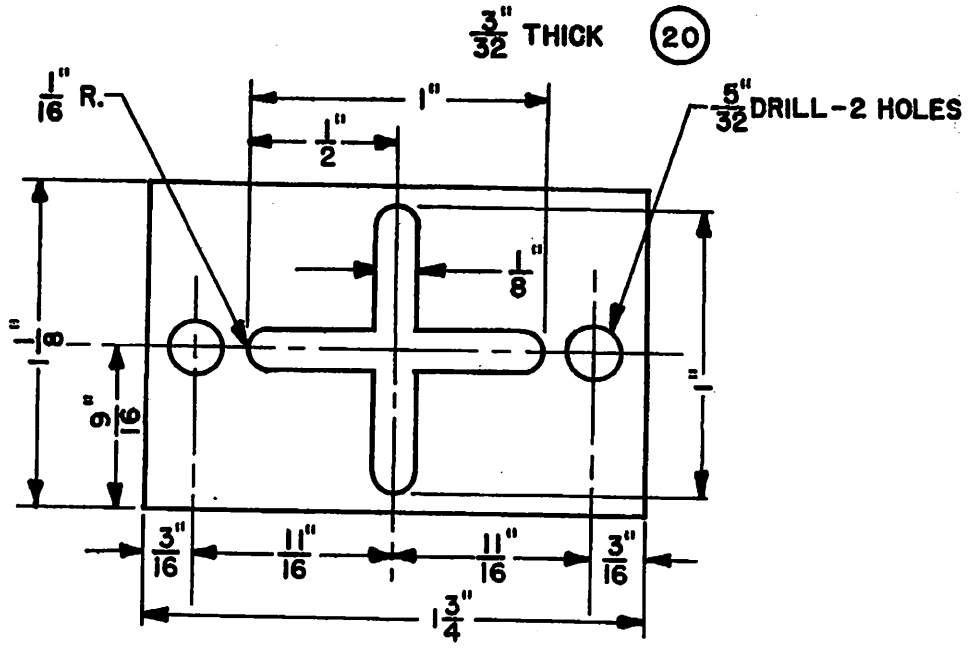


ILL - 4 HOLES

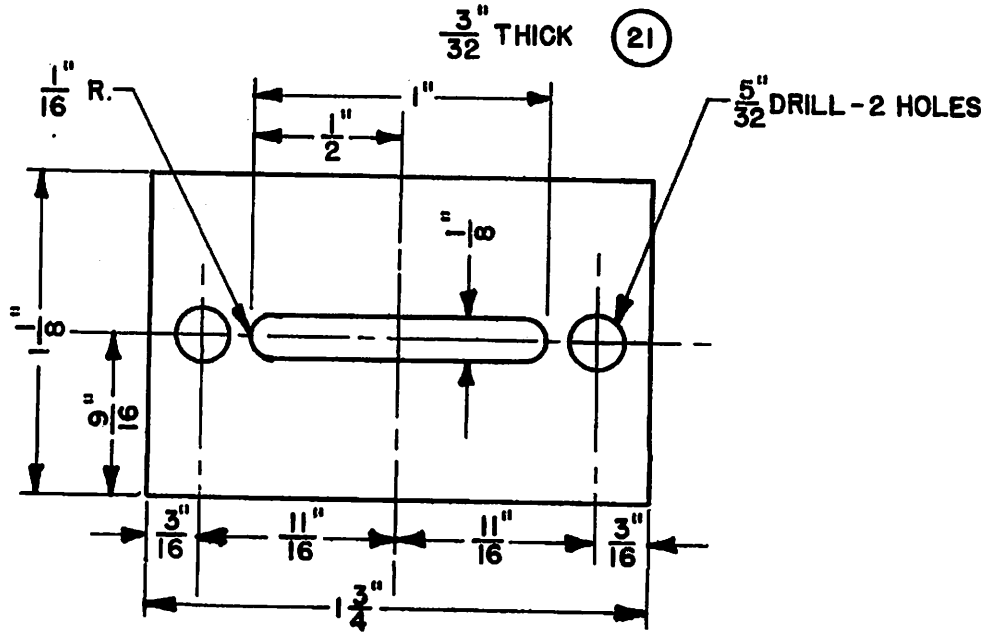


6 TAP FULL TH'DS.
" DEEP - 4 HOLES


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

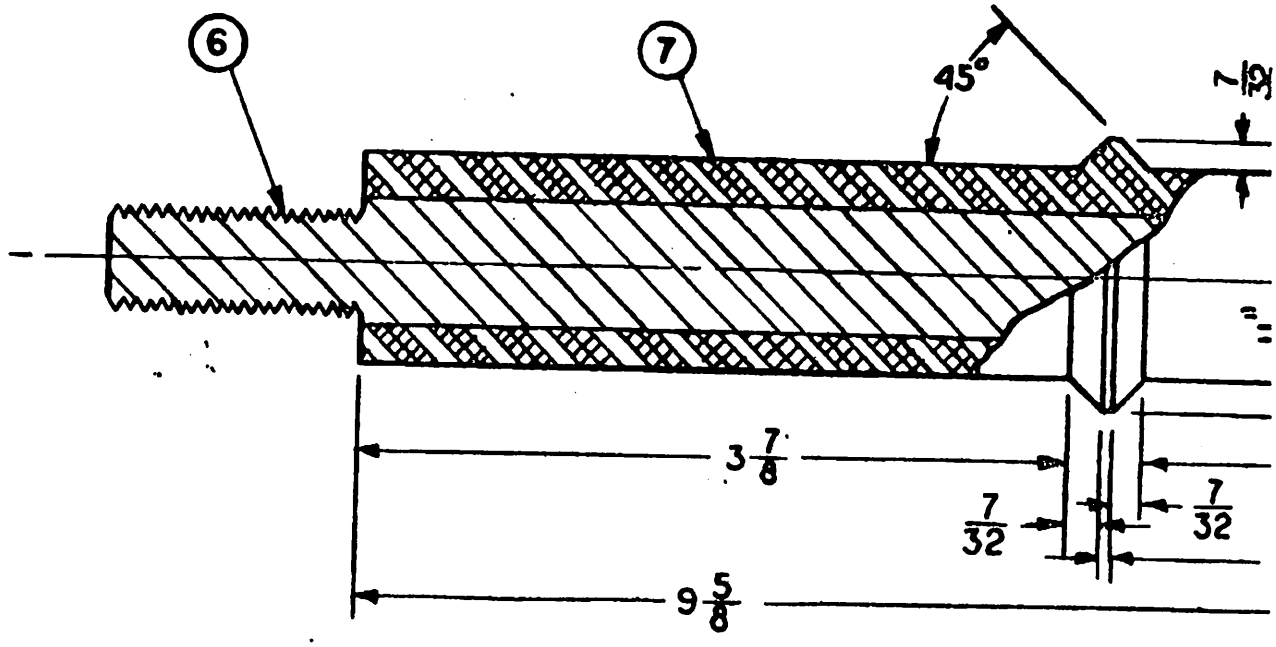

TERMINAL BOLT

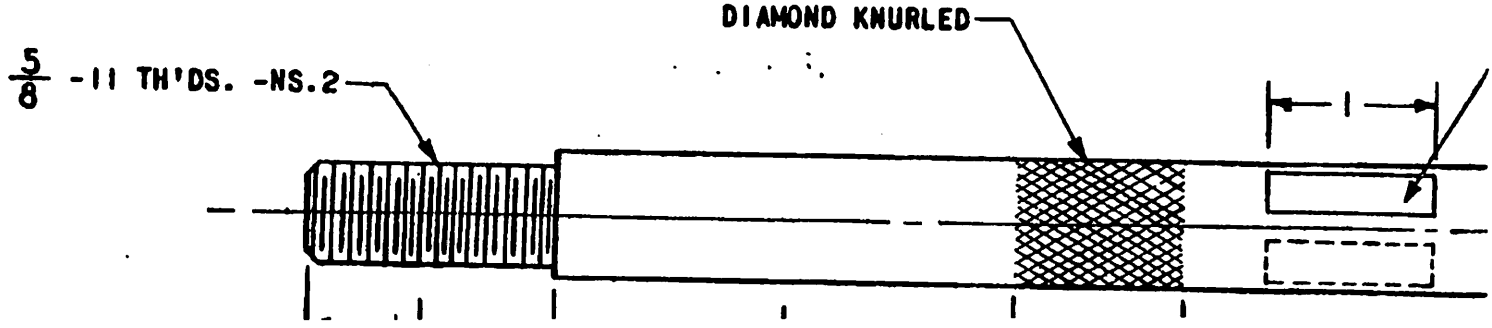


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

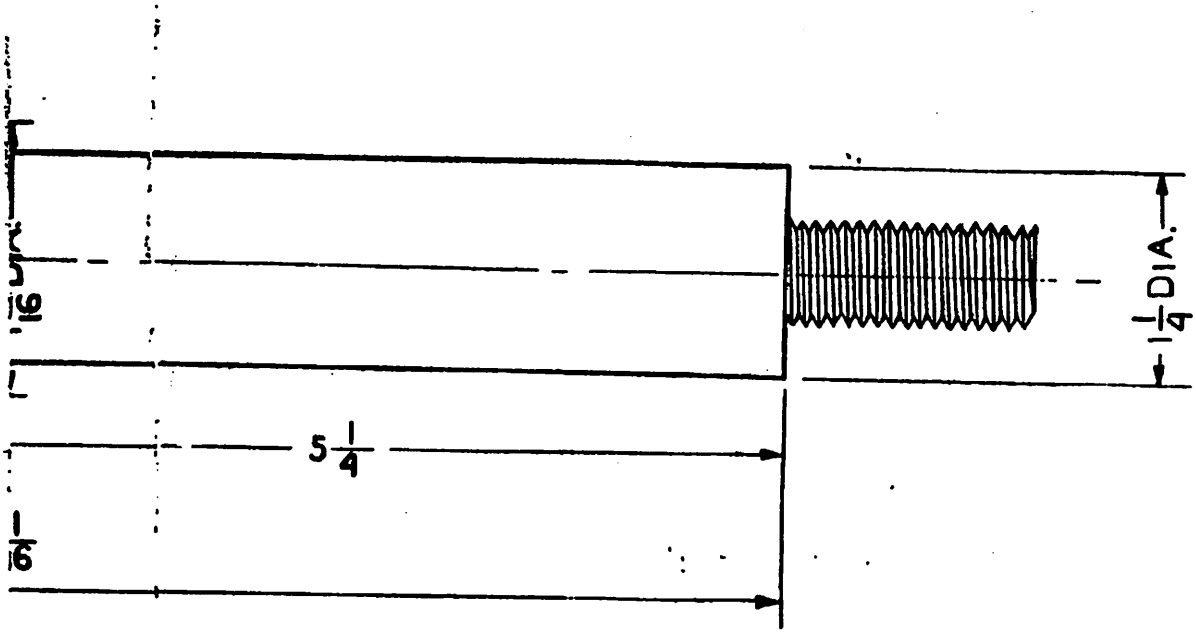


ASSEMBLY

-GRIND FLAT AS SHOWN
(2 SIDES)

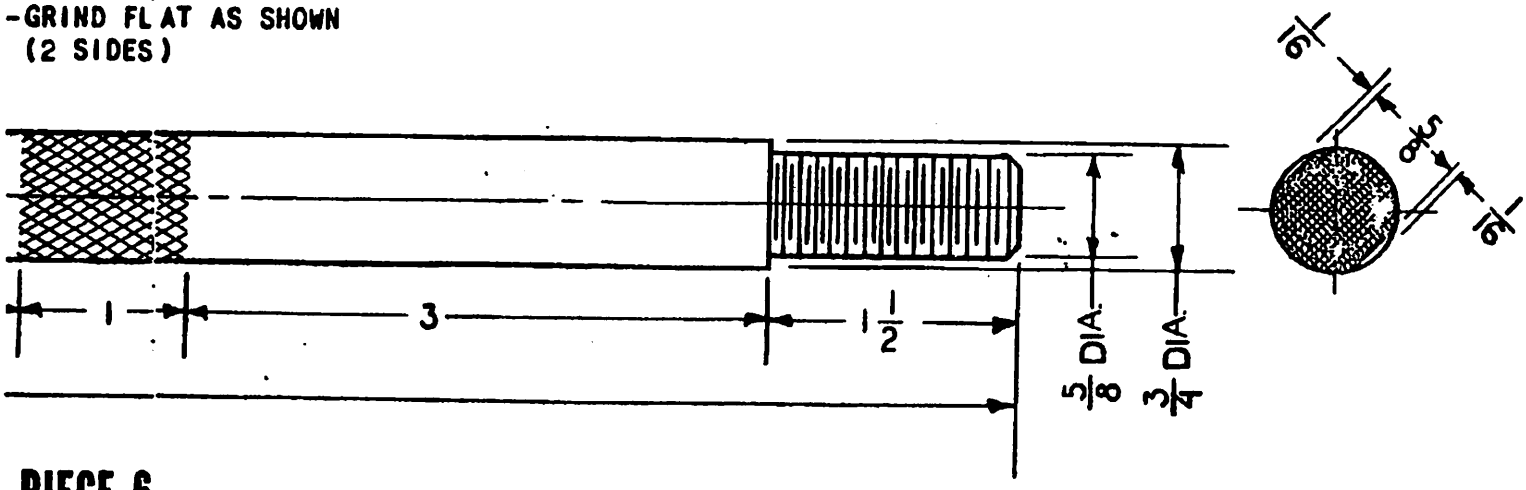

PIECE 6

Source: https://assist.dla.mil -- Downloaded: 20261O-19T21:38Z
Check the source to verify that this is the current version before use.

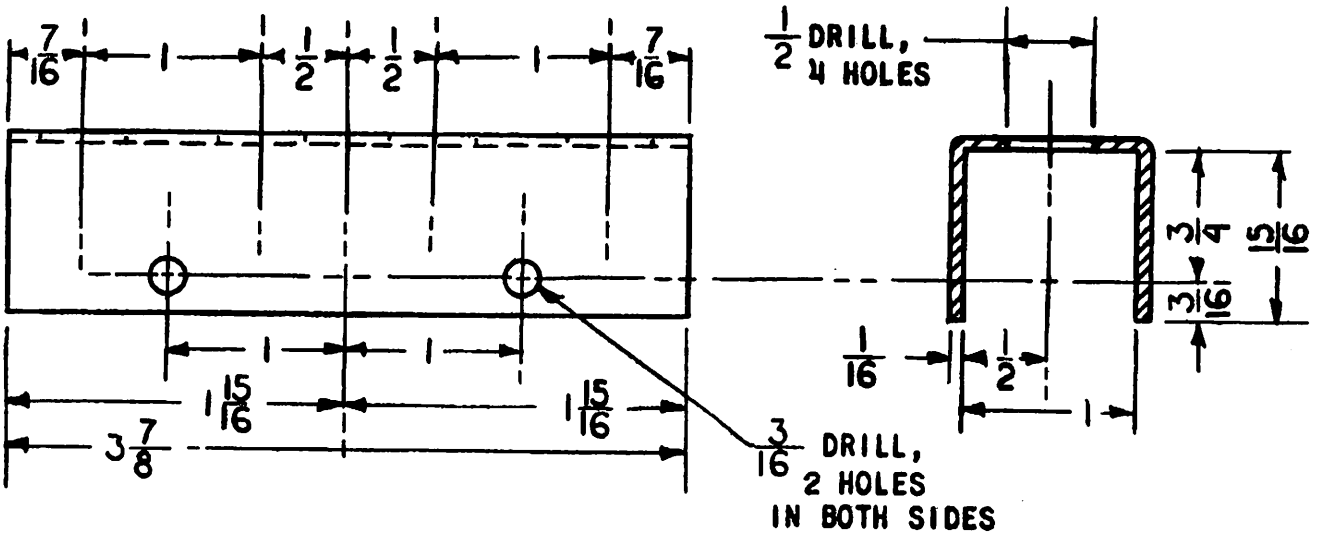

SCREW RETAINER, PIECE 11

3/4 - 16 THREADS

1/32 X 45° CHAMFER


LOOSE FIT

10


TERMINAL SCF

SH 10303

Source: https://assist.dla.mil -- Downloaded: 202610-19T21:38Z
Check the source to verify that this is the current version before use.

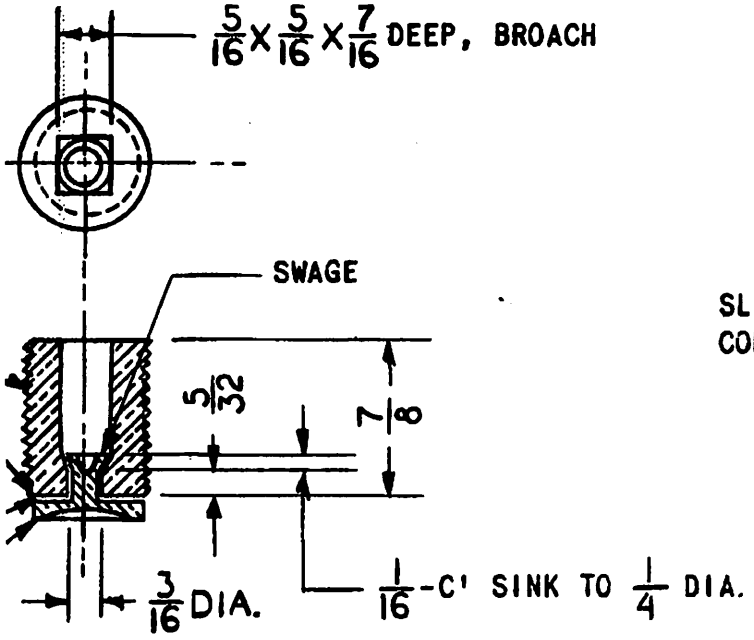

EW ASSEMBLY, PIECE 5

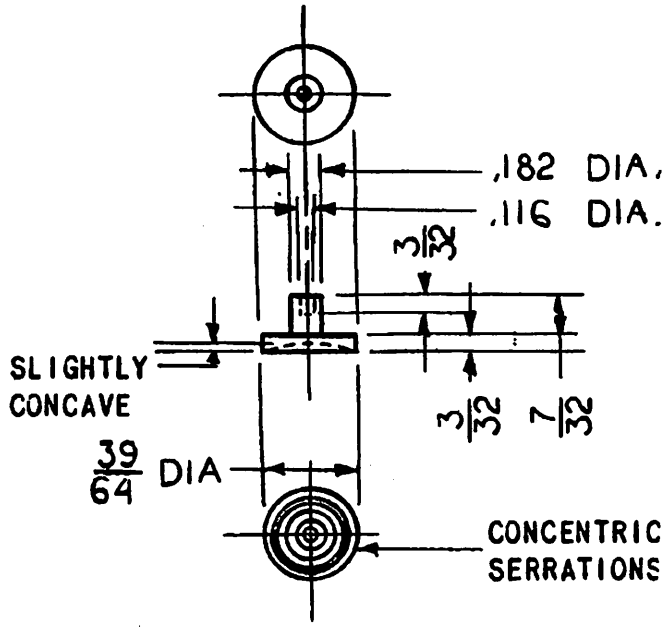

PRESSURE DISK, PIECE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

List of material						
Quantities are for one pair of d.c. bulkhead terminals						
Piece number	Name of piece	Number required Type A	Material	Material specifications	Finish	Remarks
1	Instruction sheet 8 by 10 inch	2	Paper			
2	Shakeproof washer for 5/8" - 11 stud	4	Bronze	Coml		
3	5/8" - 11 hex hd. nut	4	Brass	Coml		
4	Terminal stud	4	Cast copper alloy (alloy B2)	QQ-C-390		
5	Terminal screw	16	Brass	Coml		
6	Terminal bolt	2	Copper	QQ-B-825		
7	Insulation	2	Molded plastic type MMI-30	MIL-M-14		
8	5/8" - 11 hex hd. jam nut	4	Brass	Coml		
9	Washer - 1-1/4" o.d. 41/64" i.d. 1/16" thk.	4	Brass	Coml		
10	Pressure disk	16	Brass	Coml		
11	Screw retainer	4	Sheet steel	Coml	Zinc	
12	.164" - 32 hex nut 1-5/16"lg.	8	Steel	Coml	Zinc	
13	.164" - 32 hex nut	8	Steel	Coml	Zinc	
14	Shakeproof washer for .164" scr.	8	Steel	Coml	Zinc	
15	Tool rack assembly	2				See pc. 19 on MIL-T-24381/1 for dets.
16	Tool handle assembly	4				See pc. 16 on MIL-T-24381/1 for dets.
17	Wing screw	4				See pc. 22 on MIL-T-24381/1 for dets.
18	.138" - 32 r.h. mach. scr. 5/16" lg.	16	Steel	Coml	Zinc	
19	Information plate	2	Lam. phen.	MIL-P-15037		
20	Positive polarity marking	2	Lam. phen.	MIL-P-15037		
21	Negative polarity marking	2	Lam. phen.	MIL-P-15037		
22	Stuffing tube	4	Steel			See req. 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

All dimensions in inches unless otherwise specified Tolerances are: Decimals . . . . . ± .005 Fractions . . . . . ± 1/64 Angles . . . . . ± 1/2° degree

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. Stuffing tube shall be part number M24235/10-10 of MIL-S-24235/10.
3. Terminal bolt shall be provided with flat areas and knurling to prevent turning.
4. Electrical rating: 200 amperes, 120 volts, d.c.
5. Installation instructions required (see figure).
6. Packing and stuffing tube, to be furnished by the installer.
7. Guard for protection of terminal is covered on MIL-C-24381/8.
8. Part number: M24381/4-01.

Preparing activity:
Navy - SH
(Project 5940-N559)

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.