
MILITARY SPECIFICATION SHEET

TERMINAL CASUALTY POWER, ALTERNATING CURRENT,

ENCLOSURE ASSEMBLY FOR, SYMBOL NUMBER 1038

The complete requirements for procuring the enclosure assembly described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).

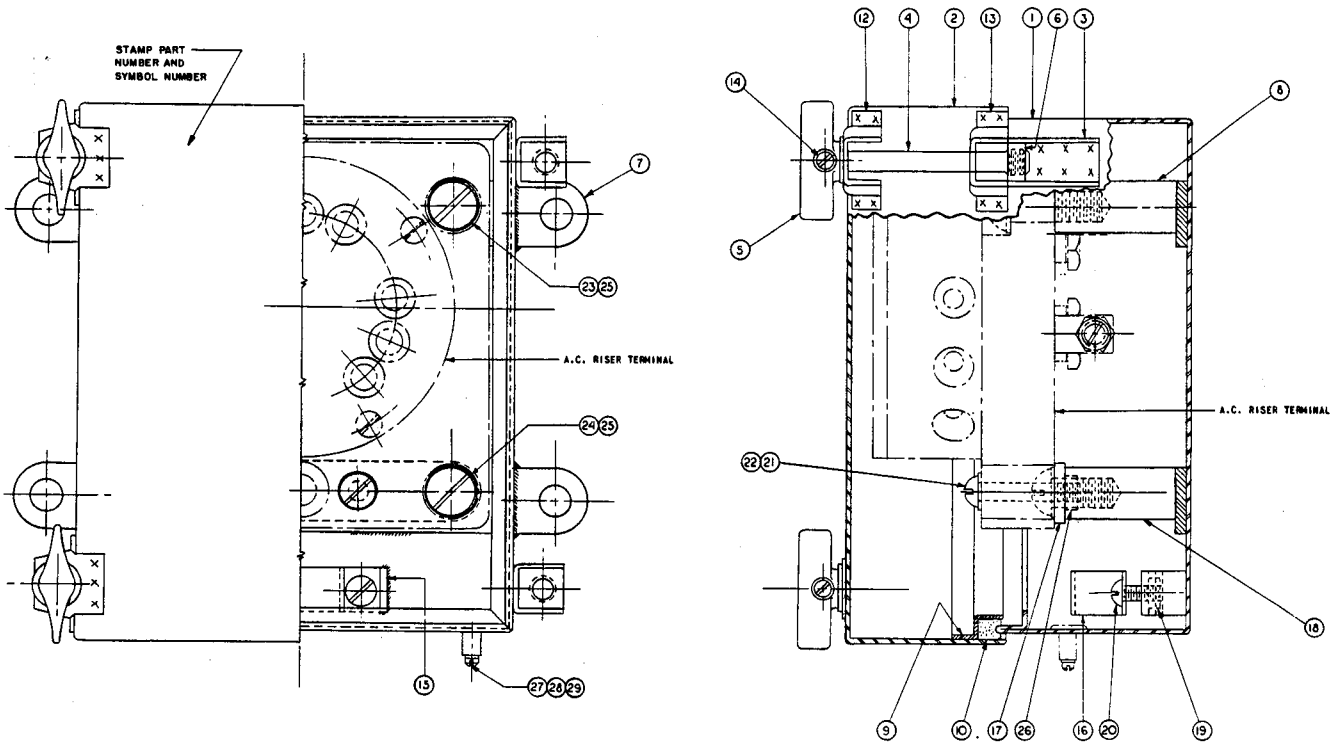

SH 10306

Enclosure assembly


Symbol No. 1038

Part No. M24381/7-01

NOTE: Supersedes NAVSHIPS Drawing 9-S-5407-L.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

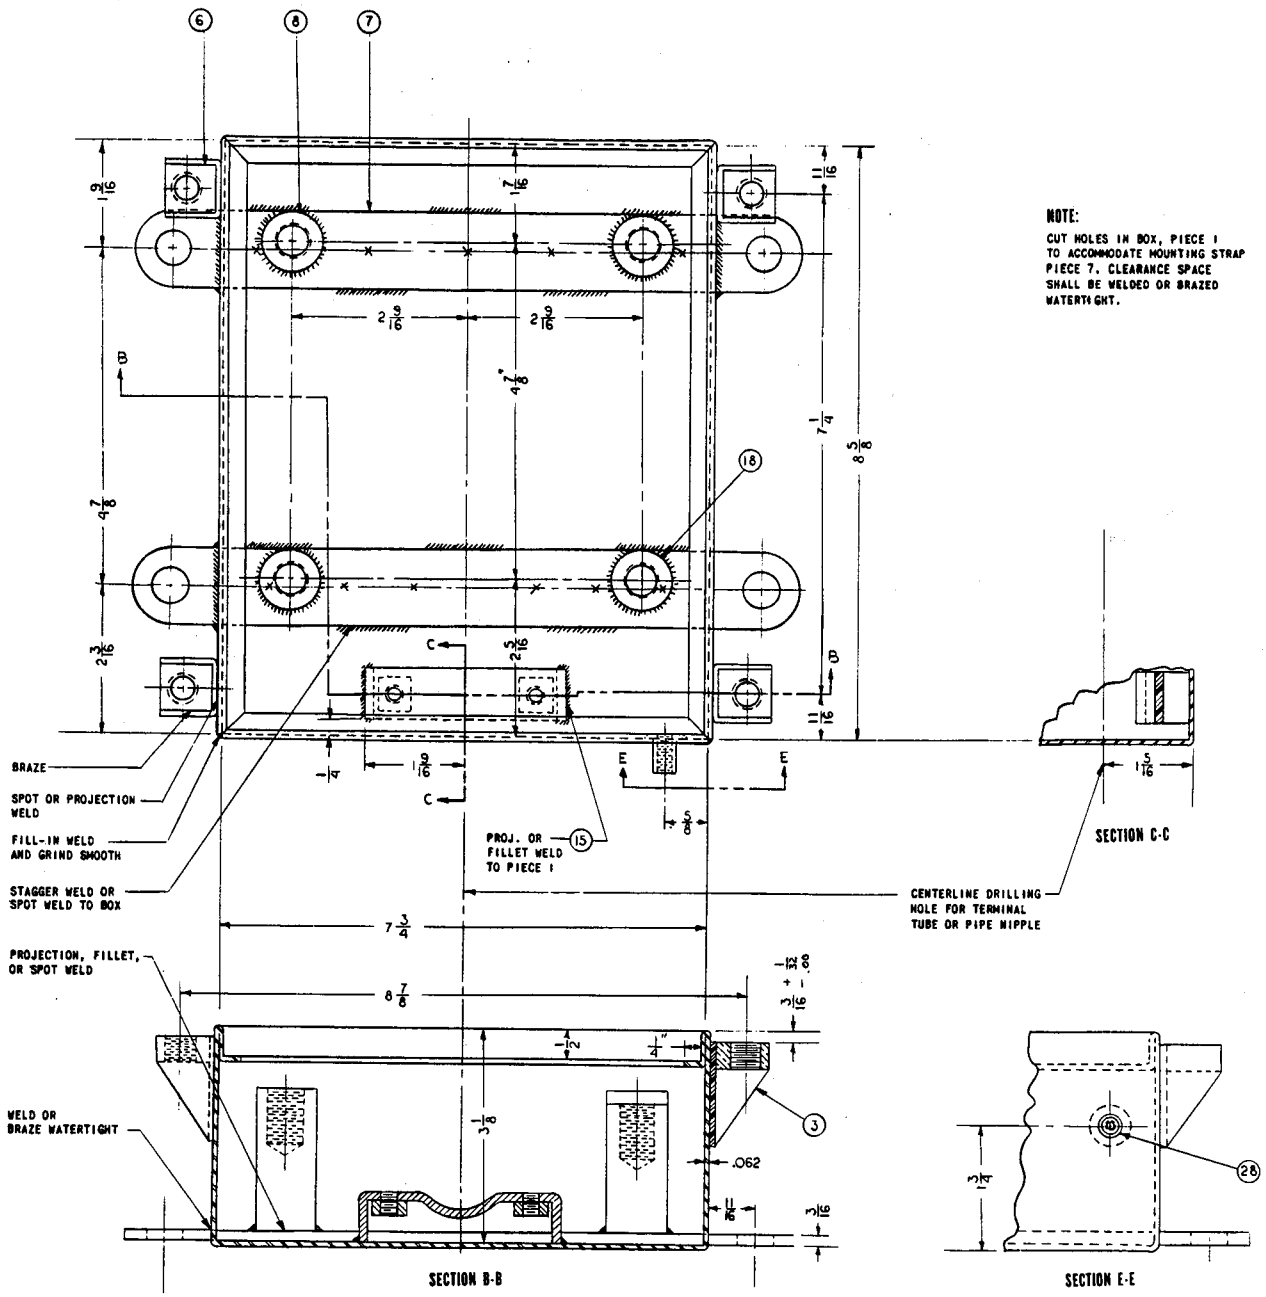


BOX ASSEMBLY, PIECE 1

SH 10307


Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-T-24381/7, dated 21 Sep 1972 does not include foldouts for pages 3,4. Please call ASSIST SERVICE DESK at 215-737-8000 for copies of these foldouts.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

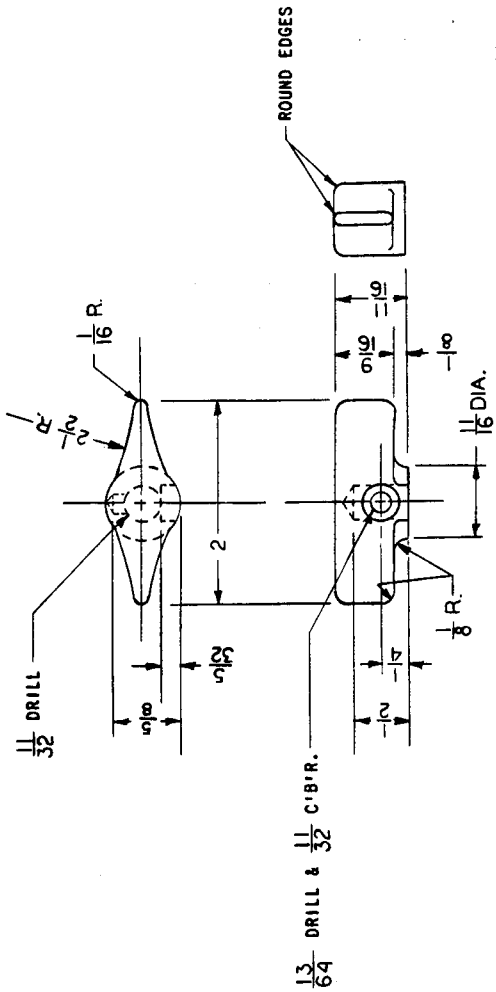


HANDLE, PIECE 5

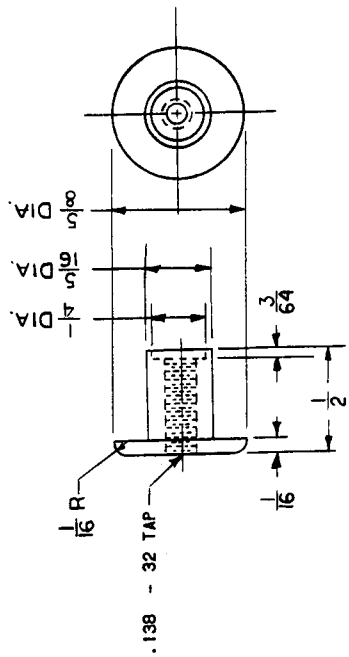

AIR CONNECTION, PIECE 28

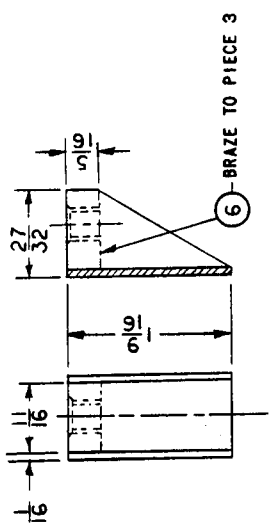


BOX LOCKING STRAP, PIECE 3

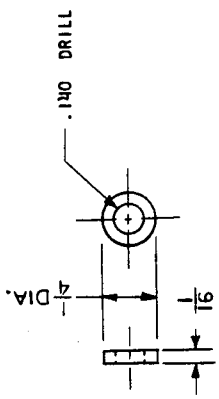


GASKET WASHER, PIECE 27

SH 10310


Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

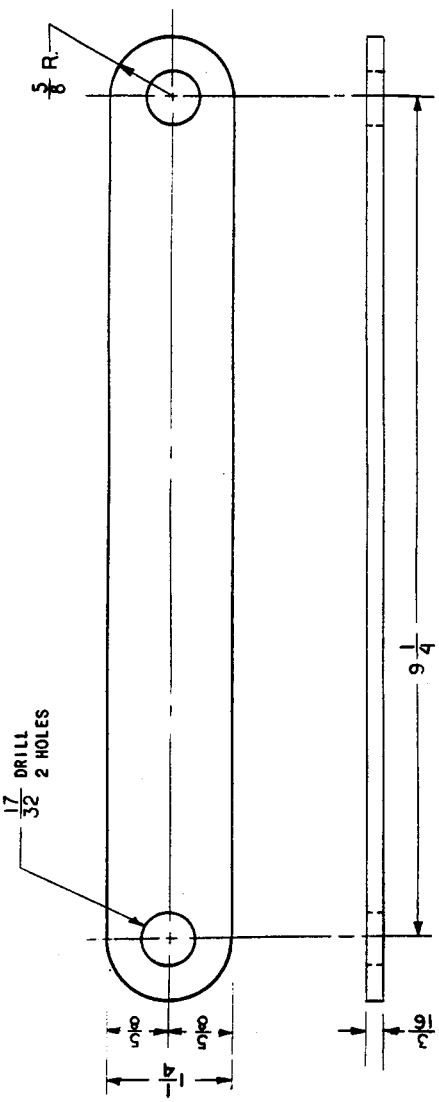


MOUNTING STRAP, PIECE 7

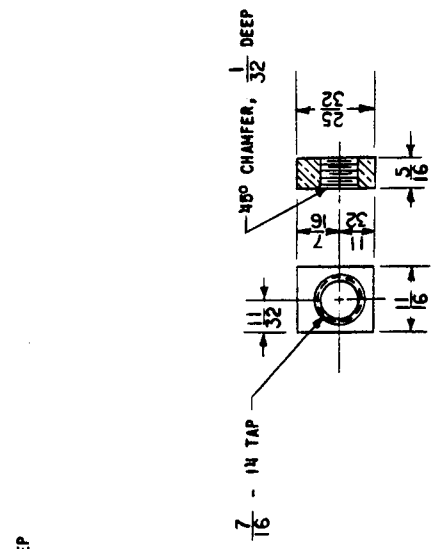


EAR NUT, PIECE 6

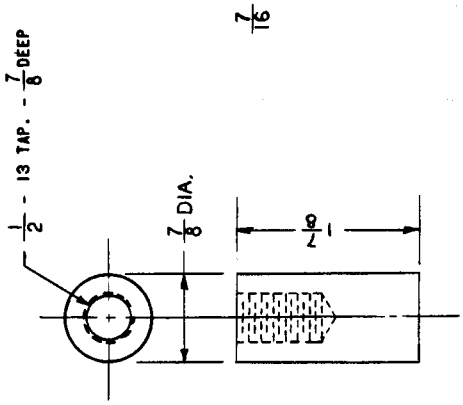

LOW MOUNTING PAD, PIECE 18

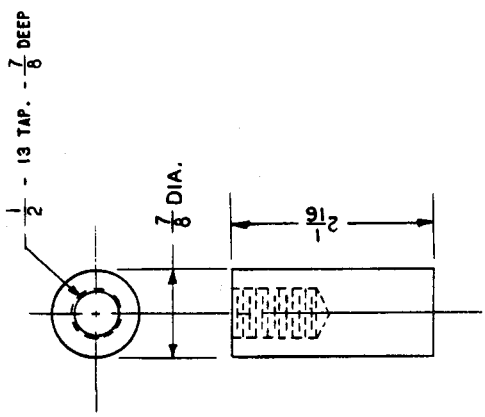

HIGH MOUNTING PAD. PIECE 8

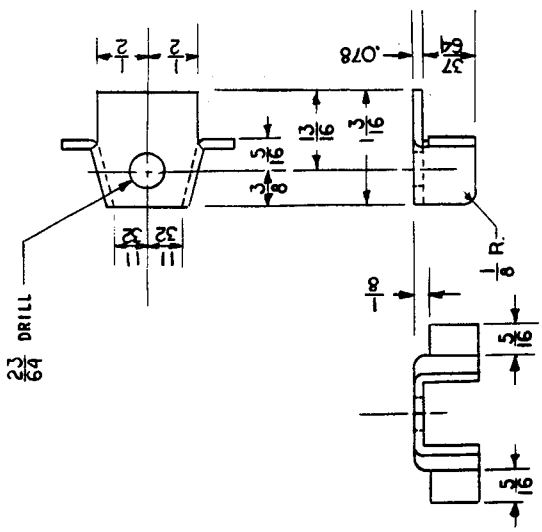

UPPER COVER EAR, PIECE 12

SH 10311

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

LIST OF MATERIAL						
QUANTITIES ARE FOR ONE ENCLOSURE						
Piece Number	Name of piece	Number req'd	Material	Material specifications	Finish	Remarks
1	Box	1	Sheet steel	Coml.		
2	Cover	1	Sheet steel	Coml.		
3	Box locking strap	4	Sheet steel	Coml.		
4	Handle stud	4	Brass	Coml.		
5	Handle	4	Cast copper alloy (alloy B2)	QQ-C-390		
6	Ear nut	4	Brass	Coml.		
7	Mounting strap	2	Steel	Coml.		
8	Mounting pad, high	2	Steel	Coml.		
9	Gasket retainer, length to suit	As req'd	Steel	Coml.		
10	3/8"sq. Gasket, Length to suit	As req'd	Strip rubber	MIL-G-1149 type I,Class 1		See Reqt. 5
11	Washer, 13/16"O.D. 3/8"I.D. .051"Th	4	Steel	Coml.		
12	Cover ear, upper	4	Steel	Coml.		
13	Cover ear, lower	4	Steel	Coml.		
14	.190"-24 Fil, H. mach. scr. 7/16"lg	4	Steel	Coml.	Zinc	
15	Cable strap	1	Steel	Coml.		
16	Cable clamp	1	Steel	Coml.	Zinc	
17	Mounting strap	1	Steel	Coml.	Zinc	
18	Mounting pad, low	2	Steel	Coml.		
19	Weld pad	2	Steel	Coml.	Zinc	
20	5/16"-18 R.H. Mach. Scr. 3/4" Lg.	2	Steel	Coml.	Zinc	
21	5/16"-18 R.H. Mach. Scr. 1-3/4" Lg.	2	Steel	Coml.	Zinc	
22	Washer (shake proof for 5/16 bolt)	2	Steel	Coml.	Zinc	Internal locking type
23	1/2"-13 R.H. Bolt, 1-3/8" Lg.	2	Steel	Coml.	Zinc	
24	1/2"-13 R.H. Bolt, 1" lg.	2	Steel	Coml.	Zinc	
25	Washer (shake proof for 1/2" bolt)	4	Steel	Coml.	Zinc	Internal locking type
26	5/16"-18 Hex. nut	2	Steel	Coml.	Zinc	
27	Gasket washer	1	Lead			
28	Air connection	1	Steel	Coml.		
29	.138"-32 fil. Hd. mach. scr.1/4"Lg.	1	Brass	Coml.		

All dimensions in inches, unless otherwise specified
Tolerances are:
Decimals . . . . . ± .005
Fractions. . . . . ± 1/32
Angles . . . . . ± 1/2 degree

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Dimensions and configuration: see figures.
2. All steel parts of box and cover shall be assembled by welding or brazing as specified herein.
3. All parts shall be positioned by jig while welding or brazing to insure proper alinement.
4. All projection and spot welding shall be performed by machines having automatic control of current, timing, and pressure to insure proper uniformity of operation.
5. Gasket shall be made in four pieces. Long dimension pieces shall be installed first and shall fit tightly throughout the groove and at the ends. Short dimension pieces shall then be fitted to butt tightly against the free ends of the long pieces. Gasket joints shall be made tight with rubber cement. Gasket shall not be cemented along the grooves.
6. Holes for terminal tubes shall be cut or drilled by the manufacturer or shipbuilder as directed. These holes shall be smooth and true without any distortion of the box. Terminal tubes installed by brazing shall not cause warping or distortion of the box.
7. Impact test required for determining the strength of welded or brazed parts.
8. Enclosure test: Submersible (15 foot) in accordance with MIL-STD-108.
9. Enclosure assembly shall accommodate a.c. riser terminal M24381/2 in accordance with MIL-T-24381.
10. Part number: M24381/7-01.

Preparing activity:
Navy - SH
(Project 5940-N562)

Source: https://assist.dla.mil -- Downloaded: 20260-19T21:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-24381/7

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ship Engineering Center
Center Building
Prince George's Center
Hyattsville, Maryland 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
Navy Department

U.S.MAIL

Commander, Naval Ship Engineering Center
DOD Standardization Program & Documents Branch
Center Building - SEC 6124D
Prince George's Center
Hyattsville, Maryland 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 20261O-19T21:38Z
Check the source to verify that this is the current version before use.