
MILITARY SPECIFICATION SHEET

TERMINAL, CASULTY POWER, GUARD, SYMBOL NUMBER 1044

(FOR BULKHEAD TERMINAL, SYMBOL NUMBER 1024)

The complete requirements for procuring the terminal guard described herein shall consist of this document and the latest issue of Specification MIL-T-24381(SHIPS).


GUARD SYMBOL 1044 (FOR BULKHEAD TERMINAL, SYMBOL 1024)

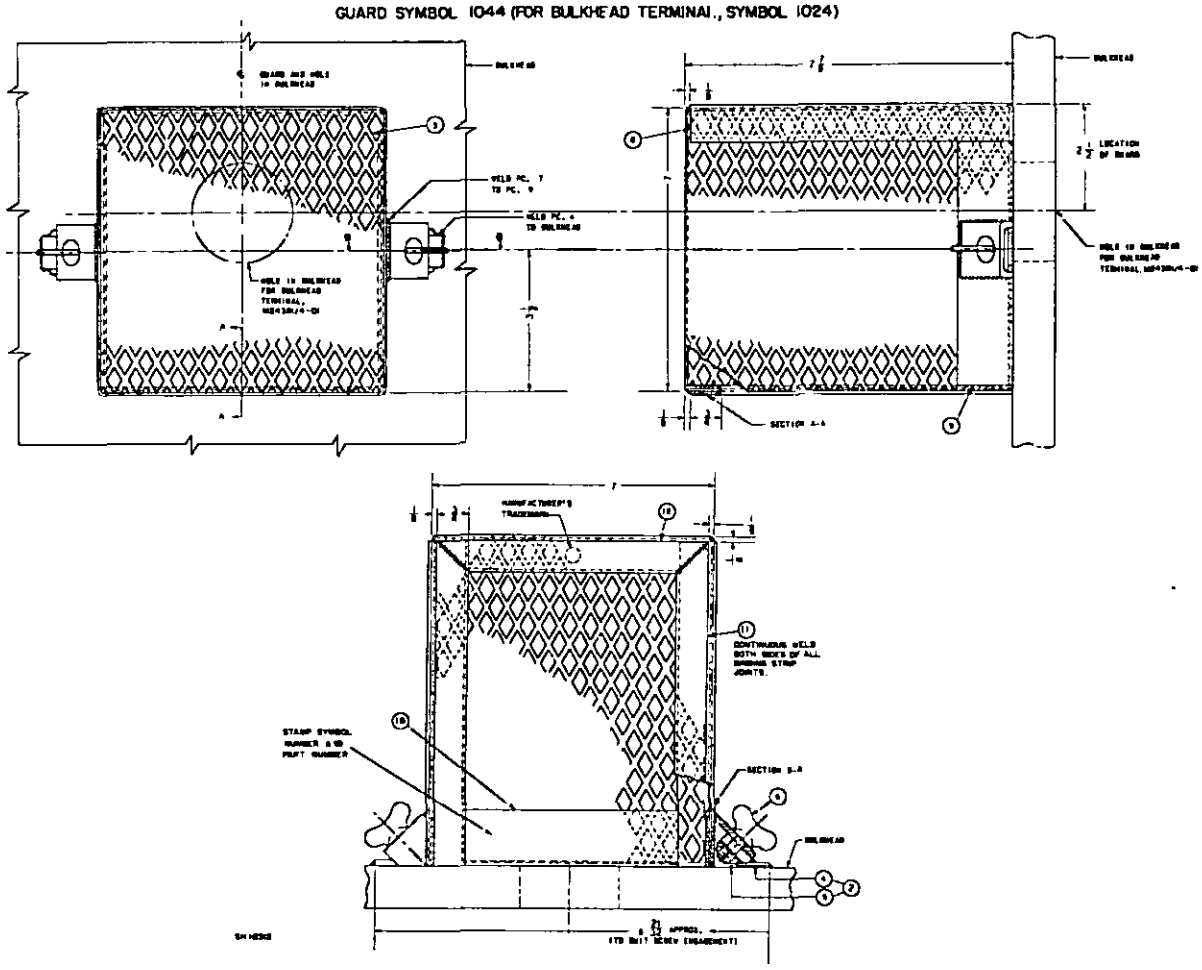


NOTE: Supersedes NAVSHIPS Drawing S6202-73480.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

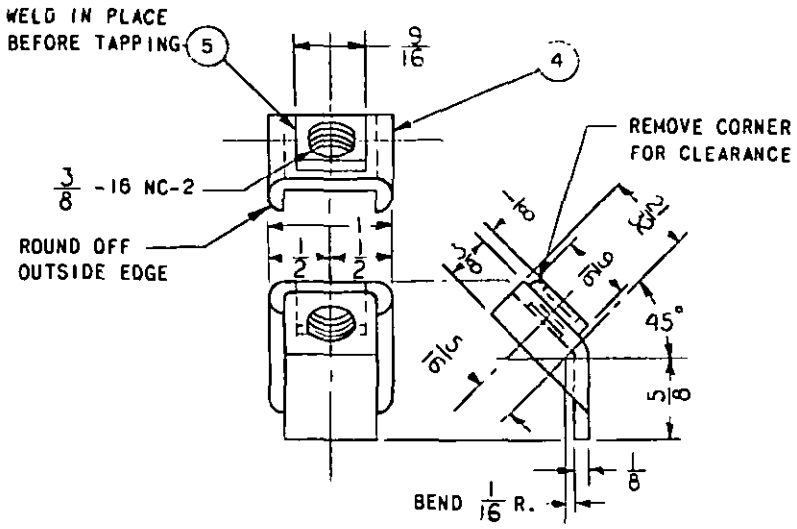


SECURING LUG ASSEMBLY, PIECE 2

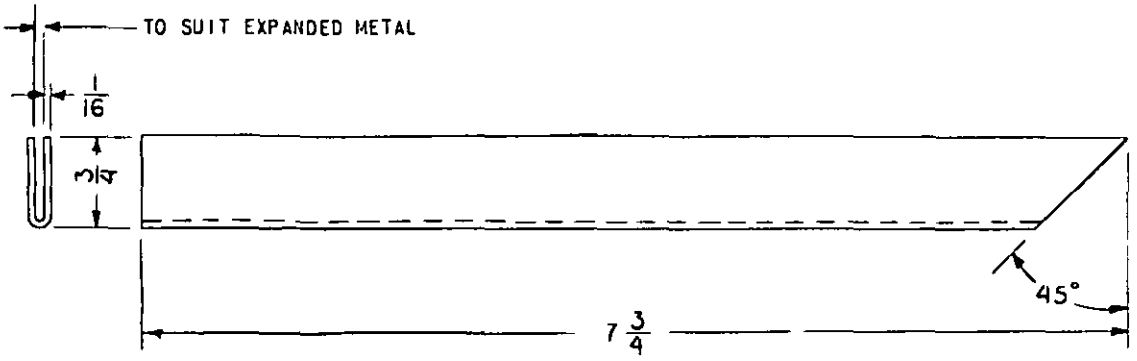


SH 10313

BINDING STRIP, PIECE 11


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

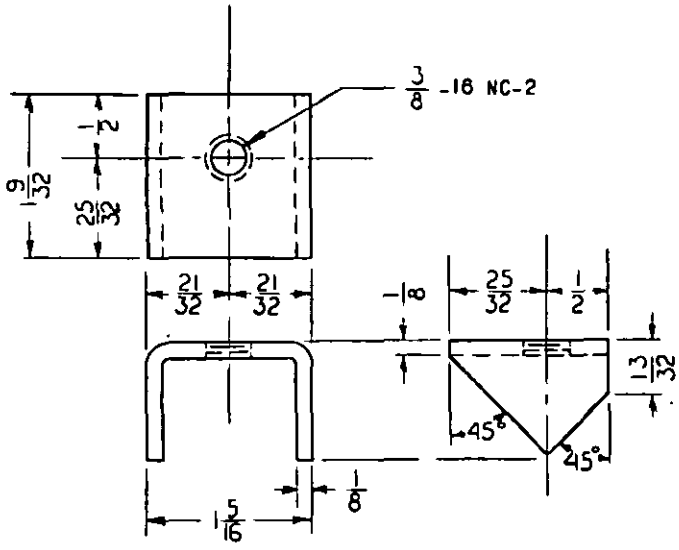

SCREW RETAINER, PIECE 7

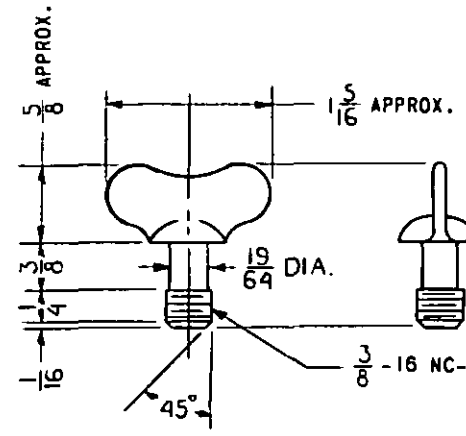


WING SCREW, PIECE 6

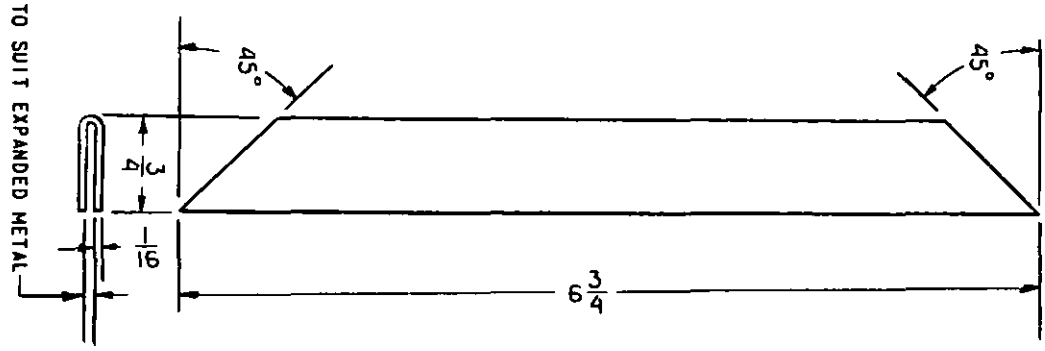


SH 10314

BINDING STRIP, PIECE 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

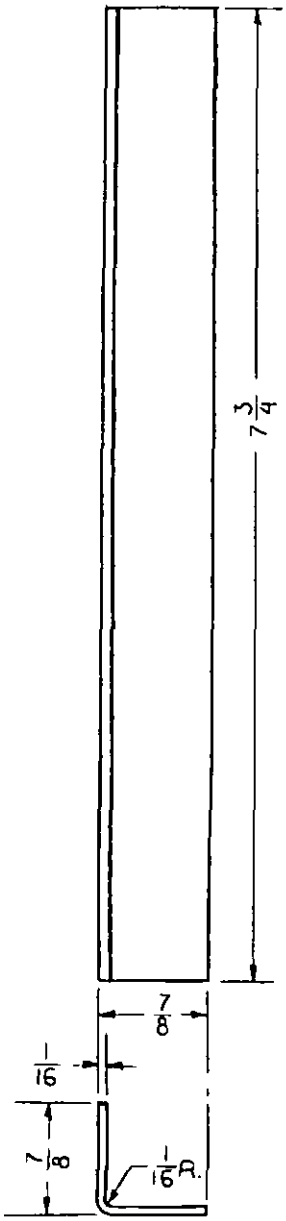

BINDING ANGLE, PIECE 8

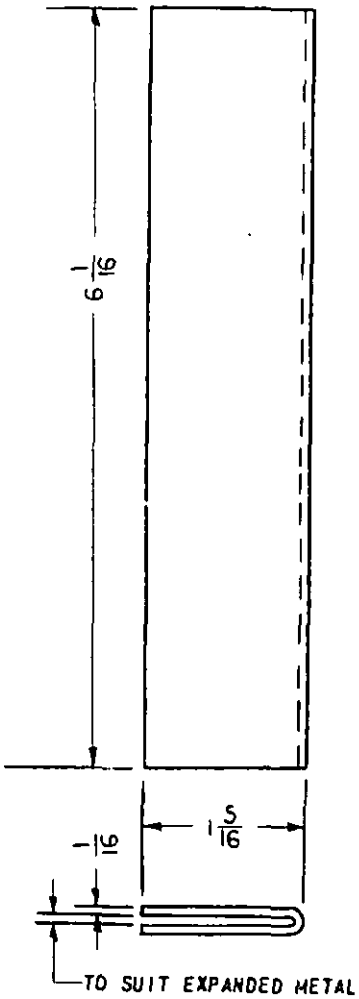

BINDING STRIP, PIECE 9

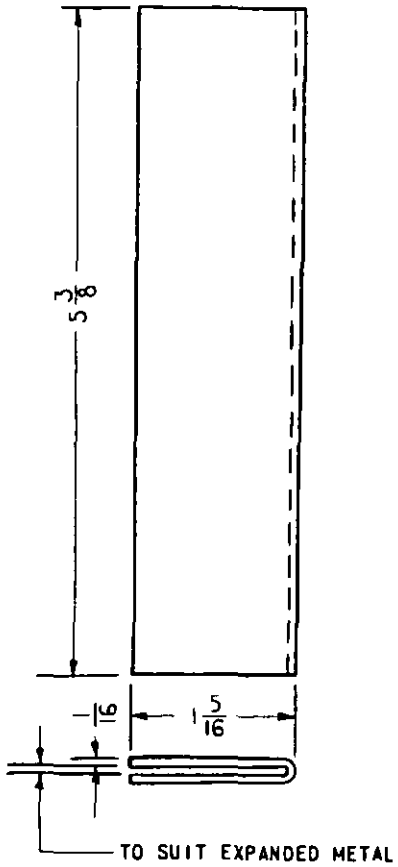

BINDING STRIP, PIECE 10

SH 10315

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.

LIST OF MATERIAL						
QUANTITIES ARE FOR ONE GUARD						
Piece Number	Name of piece	Number req'd	Material	Material Specifications	Finish	Remarks
1	Guard assembly	1				
2	Securing lug assembly	4				See reqt. 6
3	Grille	1	Steel			See reqts. 7 and 8
4	Securing lug	4	Steel			
5	Tapping pad	4	Steel			
6	Wing screw	2	Brass	Coml.		
7	Screw retainer	2	Steel		Zinc	
8	Binding angle	2	Sheet steel			
9	Binding strip	2	Sheet steel			
10	Binding strip	1	Sheet steel			
11	Binding strip	2	Sheet steel			
12	Binding strip	1	Sheet steel			

All dimensions in inches, unless otherwise specified
Tolerances are:
Decimals . . . . . ± .005
Fractions. . . . . ± 1/64
Degree . . . . . ± 1/2 degree

REQUIREMENTS:

1. Dimensions and configuration: See figures.
2. All steel parts shall be positioned by jig while welding to insure proper alinement.
3. All steel parts shall be assembled by welding as specified herein.
4. All projection and spot welding shall be performed by machines having automatic control of current, timing, and pressure to insure proper uniformity of operation.
5. Impact test required to be applied to welded attachments to determine strength of weld.
6. Two securing lug assemblies, Piece 2, shall be supplied enclosed in a fabric bag attached to piece 1.
7. Grill shall be welded securely to binding strips.
8. Grille shall be made of 0.050 inch thick expander steel, diamond size, approximately 1/2 inch by 1-1/8 inch.
9. Guard shall accommodate symbol 1024 d.c. bulkhead terminal covered on MIL-T-24381/4.
10. Part number: M24381/8-01.

Preparing activity:
Navy - SH
(Project 5940-N563)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T21:38Z
Check the source to verify that this is the current version before use.