MIL-D-00537C (ME)
4 December 1968
USED IN LIEU OF
MIL-D-537A
23 April 1959
(see 6.4)

MILITARY SPECIFICATION

DISKS, HYDROGEN ION AND CHLORINE

COLOR COMPARATORS

This limited coordination Military Specification has been prepared by the U. S. Army Mobility Equipment Command, based upon currently available technical information, but it has not been approved for promulgation as a revision of Military Specification MIL-D-537A. It is subject to modification. However, pending its promulgation as a coordinated Military Specification, it may be used in procurement.

1. SCOPE

1.1 Scope. This specification covers disks for use in comparators conforming to MIL-C-538.

1.2 Classification. The disks shall be of the following types and classes, as specified:

Type I. - pH.

Class 1. - Range 3.0 to 4.6.
Class 2. - Range 4.4 to 6.0.
Class 3. - Range 6.0 to 7.6.
Class 4. - Range 7.6 to 9.2.
Class 5. - Range 6.8 to 8.4.
Class 6. - Range 8.6 to 10.2.
Class 7. - Range 3.0 to 7.0.
Class 8. - Range 3.0 to 11.0.

Type II. - Chlorine.

Class 1. - Range 0.1 to 5.0.
Class 2. - Range 3.0 to 10.0.

FSC 6630

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

Class 3. - Range 0.1 to 2.0.
Class 4. - Range 0.1 to 10.0.
Class 5. - Range 0.1 to 10.0.

Type III. - G - agent.

Type IV. - War gas (arsenic and mustard gas).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Box, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple-Wall.

Military

MIL-P-116	- Preservation, Methods of.
MIL-I-536	- Indicator Solutions, pH Determination (for Water Supply Testing).
MIL-C-538	- Comparator, Color, Hydrogen Ion and Residual-Chlorine.
MIL-B-11722	- Bromophenol Blue Solution, Indicator, 3.0 to 4.6 pH Range.
MIL-B-11845	- Bromothymol Blue Solution, Indicator, 6.0 to 7.6 pH Range.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

DL13200E7430 - Disks, Color Standards.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U. S. DEPARTMENT OF COMMERCE - NATIONAL BUREAU OF STANDARDS

Research Paper 2619 - pH Values of the Clark and Lubs Buffer Solutions at 25°C.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

AMERICAN WATER WORKS ASSOCIATION

Journal, Volume 35, No. 8, August 1943 - Colormetric Determination of Chlorine Residuals up to 10 PPM with Orthotolidine.

(Application for copies should be addressed to the American Water Works Association, 2 Park Avenue, New York, N. Y. 10016.)

AMERICAN PUBLIC HEALTH ASSOCIATION

Standard Methods for the Examination of Water and Wastewater.

(Application for copies should be addressed to the American Public Health Association, Inc., 1790 Broadway, New York, N. Y. 10019.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

AMERICAN TRUCKING ASSOCIATIONS, INC.

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., 1616 P Street, NW, Washington, D. C. 20036.)

3. REQUIREMENTS

3.1 Description. The disks shall be in accordance with DL13200E7430 and as specified herein. Circular inserts identifying the value of glass standard shall be permanently fastened at a location 140 degrees from the glass standard when measured in a counterclockwise direction. The identifying circular inserts shall conform to figure 1, item B. Glass standards shall conform to figure 1, item A. Glass filters, when required, shall be located in the center of the disk and shall conform to figure 1, item C.

3.1.1 Drawings. The drawings forming a part of this specification are engineering design drawings. The supplier is responsible for preparing his own shop drawings. Where tolerances prescribed could cumulatively result in incorrect fits, the supplier shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the disk. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer.

3.2 Preproduction model. The supplier shall furnish a disk for examination and test within the time frame specified to prove, prior to starting production, that his production methods will produce disks that comply with the requirements of this specification (see 6.3). Examination and tests shall be those specified herein.

3.3 Material. Material shall be as specified herein and as shown on the applicable drawings. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3.1 Glass standards and filter. Glass standards and filter shall be free of cracks, scratches, bubbles, blisters, inclusions, nonuniformity of color, and other defects that will adversely affect their use. Glass standards shall withstand thermal shock from solid carbon dioxide (dry ice)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

to boiling water without cracking, chipping, or showing other defects, and, if of laminated material, shall not delaminate or separate in any manner.

3.3.2 Identifying inserts. Identifying inserts shall be of plastic material, black printing on white background.

3.4 Characteristics and accuracy.

3.4.1 Type I (pH) disk. The characteristics and accuracy of type I disks shall conform to table I, and, unless otherwise specified, shall be standardized for use with the indicator solutions specified, using viewing tubes having a 26 mm viewing depth. The coloring of the glass standards shall be such that the same reading shall be obtained when used with diffused daylight, incandescent light, or white fluorescent light.

Table I. Characteristics and accuracy of Type I disks.

Class	Range	Value	Tolerance plus and minus	Indicator solutions
1	3.0 to 4.6 pH	0.2 pH	0.04 pH	Bromophenol blue conforming to MIL-B-11722
2	4.4 to 6.0 pH	0.2 pH	0.04 pH	Bromocresol green-bromocresol purple conforming to MIL-I-536, type I
3	6.0 to 7.6 pH	0.2 pH	0.04 pH	Bromothymol blue conforming to MIL-B-11845
4	7.6 to 9.2 pH	0.2 pH	0.04 pH	Cresol red-thymol blue conforming to MIL-I-536, type II
5	6.8 to 8.4 pH	0.2 pH	0.04 pH	Phenol red D
6	8.6 to 10.2 pH	0.2 pH	0.04 pH	Phenolphthalein D, commercial grade
7	3.0 to 7.0 pH	0.5 pH	*	Wide range indicator solution
8	3.0 to 11.0 pH	1.0 pH	*	Wide range indicator solution

* Shall match master color standard (see 3.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

3.4.2 Type II (chlorine) disks. The characteristics of type II disks shall conform to table II. The accuracy of classes 1, 2, and 3 disks shall conform to table III. Unless otherwise specified, the disks shall be standardized for use with acid orthotolidene indicator solution using viewing tubes having a 26 mm viewing depth. The class 4 and 5 disks shall match the master standard disk (see 3.6). The coloring of the glass standards shall be such that the same reading will be obtained when used with diffused daylight, incandescent light, and white fluorescent light.

Table II. Characteristics of Type II disks.

Class	Range	Residual Chlorine Values in p.p.m.
1	0.1 to 5.0	0.1, 0.3, 0.5, 0.75, 1.0, 1.5, 2.0, 3.0, and 5.0
2	3.0 to 10.0	3.0, 3.5, 4.0, 4.5, 5.0, 6.0, 7.5, 8.0, and 10.0
3	0.1 to 2.0	0.1, 0.15, 0.2, 0.35, 0.5, 0.75, 1.0, 1.4, and 2.0
*4	0.1 to 10.0	0.1, 0.15, 0.25, 0.5, 1.0, 1.5, 2.5, 5.0, and 10.0
*5	0.1 to 10.0	0.1, 0.4, 0.7, 1.0, 1.5, 2.0, 3.0, 5.0, and 10.0

* Shall match master color standard.

Table III. Accuracy of Type II, classes 1, 2, and 3, disks in p.p.m.

Class 1	Class 2	Class 3
0.1 - .01	3.0 ≠ .12	0.1 ≠ .01
≠ .05		
0.3 ≠ .05	3.5 ≠ .12	0.15 ≠ .01
0.5 - .05	4.0 ≠ .12	0.20 - .01
≠ .06		≠ .04
0.75 ≠ .06	4.5 ≠ .12	0.35 ≠ .04
1.0 - .06	5.0 - .12	0.5 - .04
≠ .12	≠ .25	≠ .06
1.5 ≠ .12	6.0 - .25	0.75 ≠ .07
	≠ .38	
2.0 - .12	7.5 - .38	1.0 - .07
≠ .25	≠ .12	≠ .10
3.0 - .25	8.0 - .12	1.4 - .10
≠ .50	≠ .50	≠ .15
5.0 ≠ .50	10.0 ≠ .50	2.0 ≠ .15

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

3.4.3 Type III (G-agent) disk. Color disk for G-agent determination shall include nine glass color standards for determining G-agent concentrations in water samples. Concentrations covered by color standards for G-agents in p.p.m. shall be 0.0, 0.2, 0.5, 1.0, 2.5, 5.0, 10.0, 20.0, and 30.0, and each color shall be correspondingly labeled as follows: 0.0G, 0.2G, 0.5G, 1.0G, 2.5G, 5.0G, 10.0G, 20.0G, and 30.0G. Color glass standards shall match the master standard disk (see 3.6).

3.4.4 Type IV (war gas) disk. Color disk for war gas determination shall include eight color glass standards for determination of arsenic and mustard gas. Concentrations covered by color standards for HN-3 in p.p.m. shall be 5, 10, 15, and 20, and each color shall be correspondingly labeled 5HN, 10HN, 15HN, and 20HN. Concentrations covered by color standards for AsO_3 in p.p.m. shall be 10, 15, 20, and 25, and each color shall be correspondingly labeled as follows: 20L, 30L, 40L, and 50L. Color glass standards for providing above war gas determinations shall match the master standard disk (see 3.6).

3.5 Identification marking. Identification marking shall be applied to plastic insert conforming to Figure 1, item D, black printing on white background.

3.5.1 Type I and II. Type I and II disks shall be identified as follows:

Name of indicator for which disk is used.
"Use 26 mm. tubes."
"15 ml. sample."
Amount of indicator or reagent used.
Name or registered trademark of the manufacturer.

3.5.2 Type III disk. Type III disk shall be identified as follows:

"G-Agent Determination."
"Use 13 mm. tubes."
Name or registered trademark of the manufacturer.

3.5.3 Type IV disk. Type IV disk shall be identified as follows:

"War Gas Determination."
"Use 13 mm. tubes."
Name or registered trademark of the manufacturer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

3.6 Government-loaned property. The following property in the quantities indicated will be loaned by the Government (see 6.5):

Item No.	Description	Identification	Quantity
1	Disk evaluator	———	1
2	Master Color Standard	Type I, class 7	1
3	Master Color Standard	Type I, class 8	1
4	Master Color Standard	Type II, class 4	1
5	Master Color Standard	Type II, class 5	1
6	Master Color Standard	Type III	1
7	Master Color Standard	Type IV	1

3.7 Workmanship. Disks shall be free of warp, twist, cracks, chipped edges, surface blisters, uneven surfaces, scratches, dents, heat marks, fins, burrs, projection ridges at dividing line of mold, and unsightly finish caused by chipping, filing, or grinding of defects. Buffing or polishing may be employed if necessary.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.1.2 Parts and components. Parts and components shall be inspected in accordance with the Supplementary Quality Assurance Provisions (SQAP) shown on the drawings.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction disk shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The preproduction disk shall be tested as specified in 4.5.2.1 through 4.5.2.3, as applicable, and 4.5.2.4. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and thermal shock test shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined as specified in 4.5.1. AQL shall be 1.0 for major defects and 4.0 for minor defects.

4.4.3 Tests.

4.4.3.1 Individual. The colored glass standards of each disk shall be tested in accordance with 4.5.2.5. Those standards which do not match shall be retested in accordance with 4.5.2.1 through 4.5.2.3 as applicable.

4.4.3.2 Samples. Samples selected in accordance with 4.4.1 shall be tested in accordance with 4.5.2.4. Acceptance number shall be zero.

4.5 Inspection procedure.

4.5.1 Examination. The disks shall be examined for the following defects:

Major

101. Color glass standards and central filter glass not free of cracks and chips.
102. Color glass standards and central filter glass not free of scratches, seeds, inclusions, and striae.
103. Color glass standards and central filter glass not free of nonuniformity and fading of color.
104. Disks not free of rough edges.
105. Laminated color standards (if applicable) not free of separation.
106. Disks not free of warp, twist, uneven surfaces, cracks, and chips.
107. Numerical values on inserts, affixed to disks, missing, incomplete, illegible, or not correctly positioned.
108. Color glass standards and glass filter not secure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

109. Identification marking on disks missing, incorrect, or incomplete.
110. Inserts not flush with surface of disk.
111. Inserts not permanently affixed to disk.

Minor

201. Disks not free of scratches, dents, fins, and burrs.
202. Disks not free of unsightly finish caused by chipping, filing, or grinding of the edges.
203. Disks not free of rough surfaces, surface blisters, heat marks, and projection ridges.

4.5.2 Tests.

4.5.2.1 Type I, classes 1, 2, 3, 4, 5, and 6 disks. Disks shall be visually compared with buffer solutions and indicator solutions in a comparator using sample tubes having a 26-mm viewing depth. Buffer solutions shall be prepared in accordance with National Bureau of Standards Research Paper 2619. Indicator solutions shall conform to table I. Nonconformance to table I shall constitute failure of this test.

4.5.2.2 Type II, classes 1, 2 or 3 disks. Disks shall be visually compared with a series of liquid chlorine standards in a comparator using sample tubes having a 26-mm viewing depth. The liquid chlorine standards shall consist of sodium hypochlorite solutions treated with orthotolidine solution as specified in the procedure outlined in "Colormetric Determination of Chlorine Residuals up to 10 PPM with Orthotolidine" of the Journal of American Water Works Association. The liquid chlorine solutions shall be standardized by titrations as described in the above article and shall be matched visually with the Modified Scott permanent chlorine standards immediately before they are matched with the color disk. Preparation of the Modified Scott standards shall be in accordance with "Standard Methods for the Examination of Water, Sewage, and Industrial Wastes", published by the American Public Health Association. Nonconformance to tables II and III shall constitute failure of this test.

4.5.2.3 Type I, classes 7 and 8; type II, classes 4 and 5; type III; and type IV disks. Disks shall be visually compared with the applicable master color disk in a disk evaluator (see 3.6). Nonconformance to the master color disk shall constitute failure of this test.

4.5.2.4 Thermal shock. All colored glass standards shall be removed and immersed for not less than 10 minutes in a container of solid carbon dioxide (dry ice). All surfaces of the colored glass standards shall be in

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

contact with the dry ice. At the end of this period, the colored glass standards shall be removed from the dry ice and immediately immersed for not less than 5 minutes in a container of water at a temperature of not less than 200°F. At the end of this period, the colored glass standards shall be examined. Evidence of cracking, chipping, delamination or separation, or any other defect of any glass standard shall constitute failure of this test.

4.5.2.5 Comparison test. Disks shall be visually compared with the applicable acceptable preproduction model disk in a disk evaluator (see 3.6). Nonconformance to the applicable acceptable preproduction model disk shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

112.	Materials, methods, and containers not as specified for level A or B. Each incorrect material, method, or container shall be considered one defect.
113.	Consolidated packaging not as specified for level A or B.
114.	Gross weight exceeds 200 pounds for level A.
115.	Strapping not as specified for level A.
116.	Gross weight or size exceeds the limitations of the box for level B.
117.	Marking missing, illegible, incorrect, or incomplete.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified.

5.1.1 Level A. Each disk shall be preserved in accordance with MIL-P-116, method IC-2, using the suppliers commercial box or containers, or a close-fitting box conforming to PPP-B-566, variety 1, style, type and class optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

5.1.1.1 Consolidated packaging. Disks of like description shall be consolidated together in a close-fitting box conforming to PPP-B-636, W6c, in quantities not to exceed the weight limitations of the box specification.

5.1.2 Level B. The disks shall be preserved and packaged as specified for level A, except boxes for consolidated packaging shall be type CF, class domestic, variety SW, grade 125, 175.

5.1.3 Level C. The disks shall be preserved and packaged to afford protection against deterioration and damage to the initial destination. Only disks of like description shall be packaged together.

5.2 Packing. Packing shall be level A, B or C as specified.

5.2.1 Level A. The disks shall be packed in quantities not to exceed 200 pounds in close-fitting boxes conforming to PPP-B-601, overseas type, style optional. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall be class B.

5.2.2 Level B. The disks shall be packed in close-fitting fiberboard boxes conforming to PPP-B-640, class 2, style optional, or PPP-B-636, V3c, style optional. The gross weight or size of each box shall not exceed the limitations of the applicable box specification. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.2.3 Level C. The disks shall be packed in a manner to assure carrier acceptance and safe delivery to destination at lowest rates in accordance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. In addition to any special marking required by the contract or order, marking for shipment and storage shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The color disks covered by this specification are intended for use in a comparator conforming to MIL-C-538 to determine pH value, residual-chlorine content of water, G-agent concentration, or war gas determination.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class of disk required (see 1.2).
(c) Time frame required for submission of preproduction model (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

(d) When other indicator solutions are required (see 3.4.1 and 3.4.2).
(e) Level of preservation and packaging and level of packing required (see 5.1 and 5.2). Level B preservation and packaging is intended to provide economical but limited protection and should be specified only when it is determined the disks will be held in covered storage.

6.3 Preproduction model. Any changes or deviations of production disks from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the supplier of his obligation to furnish disks conforming to this specification.

6.4 Supersession. It should be noted that MIL-D-00537B (DM), dated 31 March 1965, is also in existance. It is planned to supersede both MIL-D-00537B (DM) and this revision, MIL-D-00537C (ME) with a coordinated revision. The relationship between MIL-D-537A and MIL-D-00537C (ME) is as follows:

MIL-D-537A	MIL-D-00537C (ME)
Class 1	Type I, class 1
Class 2	Type I, class 2
Class 3	Type I, class 3
Class 4	Type I, class 4
Class 5	Type II, class 1
Class 6	Type I, class 6
Class 7	Type II, class 2

6.5 Government-loaned property. The contracting officer should arrange to loan the property specified in 3.6. Property may be obtained from the following:

a. U. S. Army Mobility Engineering, Research, and Development Center, Fort Belvoir, Va.
(1) Disk evaluator.
(2) Type I, class 8 master color standard.
(3) Type II, class 5 master color standard.


b. Defense Medical Supply Center.
(1) Type I, class 7 master color standard.
(2) Type II, class 4 master color standard.
(3) Type III master color standard.
(4) Type IV master color standard.

Custodians:
Army - ME


Preparing activity:
Army - ME

Project No. 6630-A134


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

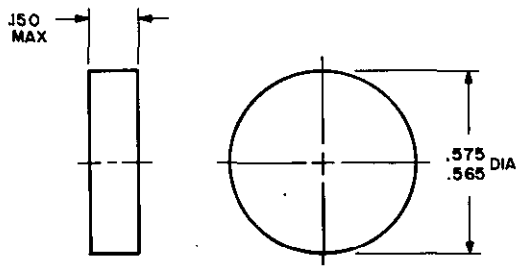


ITEM A

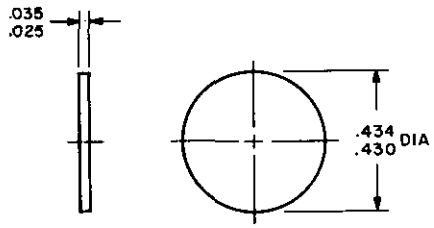

ITEM B

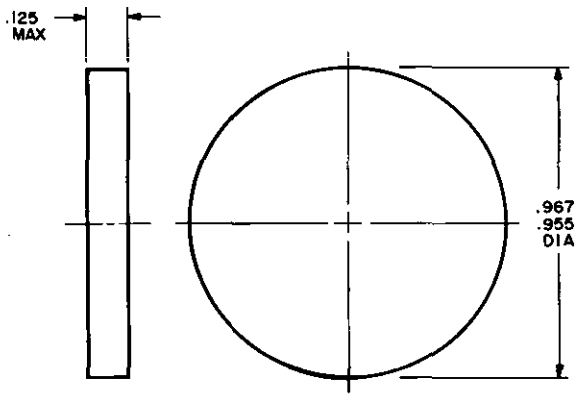

ITEM C

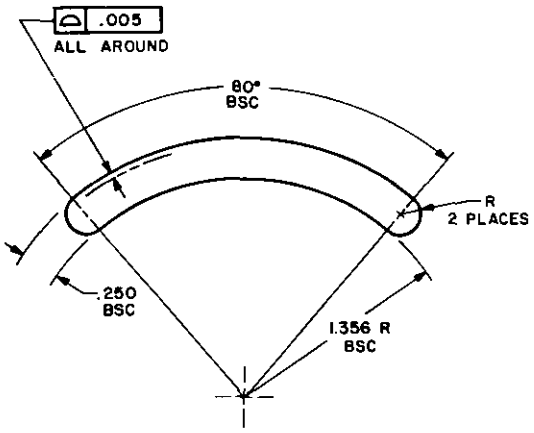

ITEM D

FIGURE 1

DX-1223

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-D-00537C(ME) Disks, Hydrogen Ion and Chlorine Color Comparators

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T07:41Z
Check the source to verify that this is the current version before use.