MILITARY SPECIFICATION

BAG, URINE COLLECTION, PLASTIC, DISPOSABLE, 50S

1. SCOPE

1.1 This specification covers one type of disposable, single-use, plastic, urine collection bag, suitable for the collection and measurement of urinary output of humans.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Boxes, Set-Up, Paperboard.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:34Z
Check the source to verify that this is the currentversion before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING MATERIALS

ASTM Designation D 1003-61	Standard Method of Test for Haze and Luminous Transmittance of Transparent Plastics.
ASTM Designation D 1709-62T	Tentative Method of Test for Impact Resistance of Polyethylene Film by the Free Falling Dart Method.
ASTM Designation D 1746-62T	Tentative Method of Test for Transparency of Plastic Sheeting.
ASTM Designation D1894-63	Standard Method of Test for Coefficients of Friction of Plastic Film.

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia 3, Pa.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Wire. The wire shall be low-carbon, galvanized, steel wire, of 0.054-inch diameter (No. 17, Steel Wire gage).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

3.1.2 Cotton cord. The cord shall be No. 30 cotton cord, and shall consist of three strands, of 10 threads each. The cord shall be dyed deep-green and waxed.

3.1.3 Polyethylene lay-flat tubing. The polyethylene lay-flat tubing used in the construction of the bags shall be 8 inches ± 3/16 inch wide, and a minimum of 4 mils thick. (Commercial tolerances on thickness shall apply.) The film, after being extruded into tubing, shall have the following properties, when tested as specified in 4.4.3:

Impact resistance (falling dart)	300 grams minimum
Coefficient of friction	0.20 maximum
Haze	11 percent minimum
Transparency	50 percent maximum

3.2 Design and construction. The entire unit shall consist of a 4-liter, transparent plastic bag, a waxed drawstring to close the top, and an adjustable wire hook for attachment to a hospital bedrail. The overall length of the plastic bag shall be 17-1/2 inches ± 1/4 inch. The two knots of the drawstring shall be at least 1 inch out from the side edges. All printing shall be in permanent, waterproof, green ink. When the bags are tested for accuracy of calibration as specified in 4.4.1, the accuracy at the 2000 cubic centimeters (cc.) mark shall be ± 150-cc., and at the 4000-cc. mark shall be ± 200-cc. The wire, after bending, shall have an overall length of 12-1/4 inches ± 1/4 inch. The bent-over length shall be 1-3/16 inches ± 1/4 inch. Design shall be as indicated in figure 1. The completed bags shall not leak, when tested as specified in 4.4.2.

3.3 Identification marking. Each bag shall be legibly marked with the manufacturer's name or registered trademark in permanent, waterproof, green ink. Nameplates secured by adhesives shall not be used.

3.4 Workmanship. Workmanship shall be first class throughout. The bags shall be free from defects which detract from their appearance or may impair their serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Total (major and minor combined) defects	II	4.0
For dimensional examination	S-3	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

Component (unit of product	Characteristic	Requirement	Test procedure	Inspection level	AQL
Bag	Volumetric accuracy	3.2	4.4.1	S3	*
Bag	Leakage	3.2	4.4.2	S3	*
Extruded tubing	Impact resistance	3.1.3	4.4.3		**
Extruded tubing	Coefficient of friction	3.1.3	4.4.3		**
Extruded tubing	Haze	3.1.3	4.4.3		**
Extruded tubing	Transparency	3.1.3	4.4.3		**

* Not less than three samples shall be taken regardless of lot size. Acceptance number shall be zero for all sample sizes.

** Number of samples from each lot of tubing shall be as indicated in the applicable ASTM test method.

4.2.3 Where possible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 Examination. The bags shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:34Z
Check the source to verify that this is the current version before use.

Categories and defects *

Major

101	Construction not as specified.
102	Bag not free of holes, tears or cracks.
103	Either end of the bag not properly sealed.
104	Waxed drawstring not capable to function as specified.
105	Heat sealing not continuous.

Minor

201	Identification marking missing, incomplete, illegible, or not securely attached.
202	Bag not clean or free of dirt.

* Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The apparatus shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Volumetric accuracy. The drawstring shall be pulled until an opening of 1 inch (nominal) remains at the top of the bag. The bag shall be suspended from a suitable support by means of the wire hook. The bags shall be filled with water at 20° centigrade (C.) to 25° C. to the 2000-cc. and 4000-cc. marks, and the actual volume of water added noted in each case.

4.4.2 Leakage. The bags shall be filled to the 4000-cc. mark with cold tap water. The bags shall then be suspended from a suitable support by means of the wire hook, for 24 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

4.4.3 Polyethylene, lay-flat tubing tests. The test properties of the extruded lay-flat tubing shall be determined in accordance with the applicable ASTM tests, as follows:

TEST PROPERTY	ASTM TEST
Impact resistance	D1709-62T
Coefficient of friction	D1894-63
Haze	D1003-61
Transparency	D1746-62T

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. Fifty (50) bags, as specified, constitute one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table I shall be packaged in each unit and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table I. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	6 units

5.1.2.1 Packing variation permitted. If the required number of units to be shipped is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit (50 bags) shall be packaged in a carton of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors shall be acceptable. Wires shall be placed within the unit carton in such a manner as to prevent damage to the bags. Closure of carton shall be adequate to prevent spillage under normal handling.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3,, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; PPP-B-621, table III; or PPP-B-636, type CF, class weather-resistant.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.1.3 Closure. Closure of wood boxes shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix, and waterproofing shall conform with 30.4, of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall conform to PPP-B-601, table I, using type III, class 1 plywood; or shall be designed for type 2 load, and constructed in accordance with PPP-B-585, style 3,for class 2 use; PPP-B-621, table I; or PPP-B-636, type CF, class domestic and method I closure shall be utilized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Interior packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable level of packing (see 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Review activities:
Army - MD
Navy - MS
Air Force - 03

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:34Z
Check the source to verify that this is the currentversion before use.

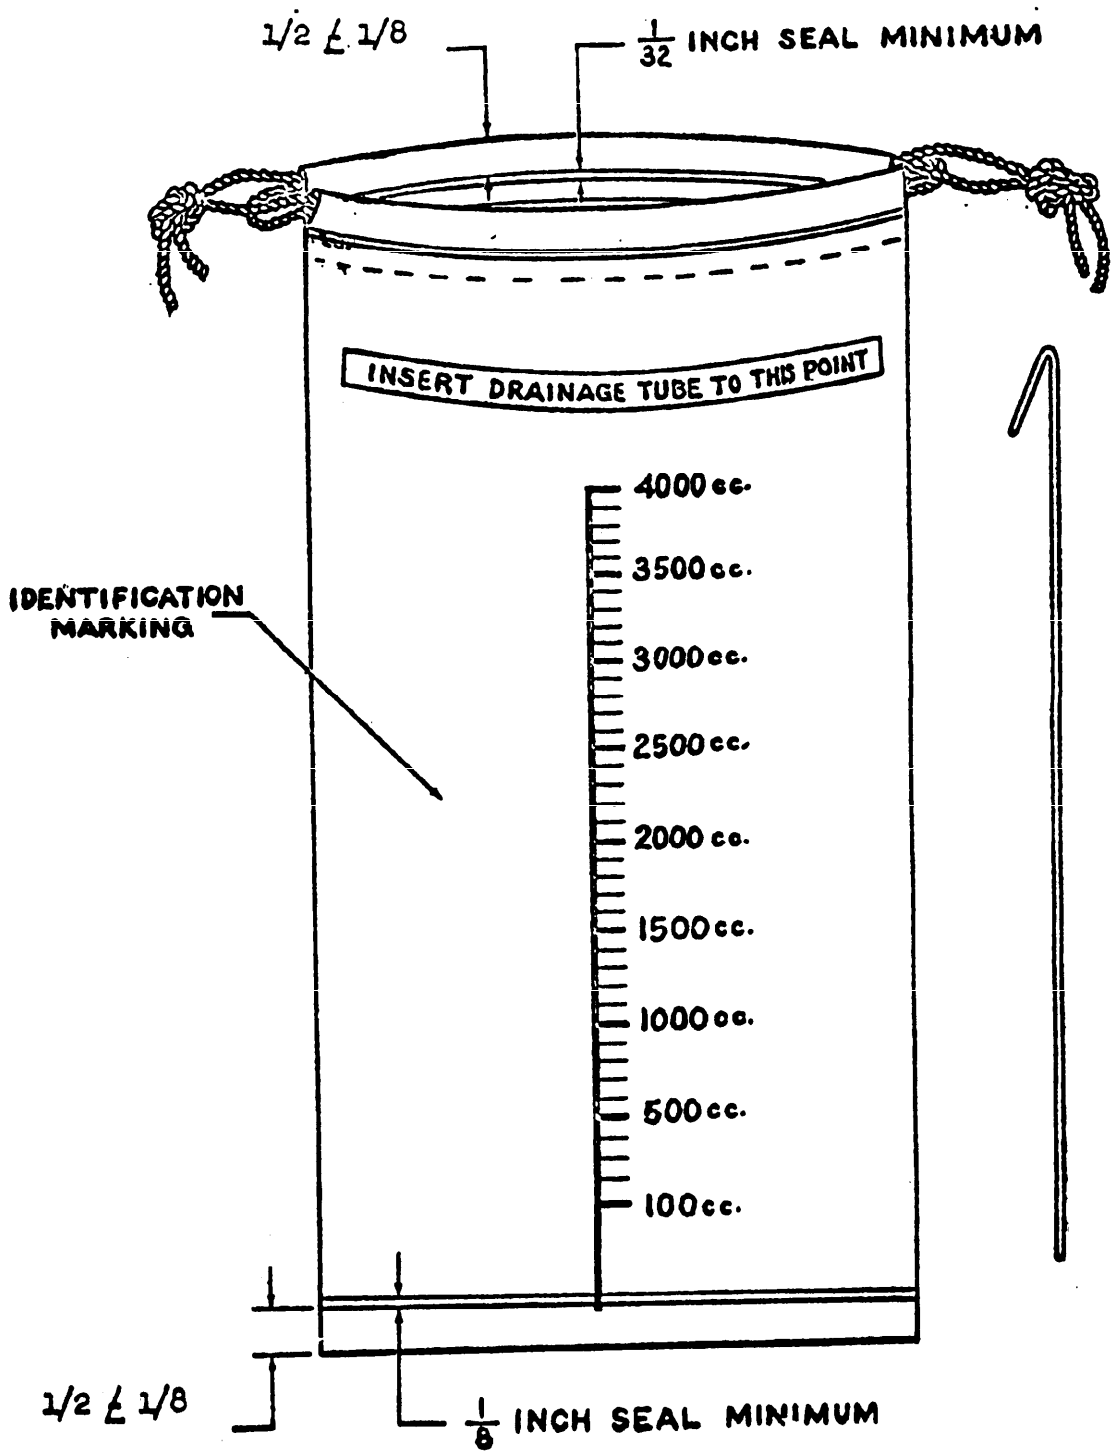


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:34Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of [illegible] and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION: ENG, CABLE COLLECTION, PLASTIC, DISPOSABLE, 50S — MIL-B-36419(DM) — dated, 30 March 1965

ORGANIZATION (Of submitter) | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

NAVSHIPS FORM 1100 — NWD PPSO 12502

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD UNDER

DEFENSE SUPPLY AGENCY
DEFENSE MEDICAL SUPPLY CENTER
3RD AVENUE AND 29TH STREET
BROOKLYN, N.Y., 11232

POSTAGE FEES PAID
DEFENSE SUPPLY AGENCY

OFFICIAL BUSINESS

DEFENSE SUPPLY AGENCY

DEFENSE MEDICAL SUPPLY CENTER

ATTN: DIRECTORATE OF TECHNICAL OPERATIONS (CODE T:5)

3RD AVENUE AND 29TH STREET

BROOKLYN, N.Y., 11232

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:34Z
Check the source to verify that this is the current version before use.